

# Installation manual

Dimensions:D19" H23" L10

Bulb Type:E12 bulb not included

Lamp Frame Weight(lbs):10.6

Total Weight(lbs):29



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers. Please find the enclosed detailed instruction and read carefully for proper installation.

## SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


## CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

## Unpack the Package


Please open the box carefully and check all the items are inside the box.

## Frame Parts List

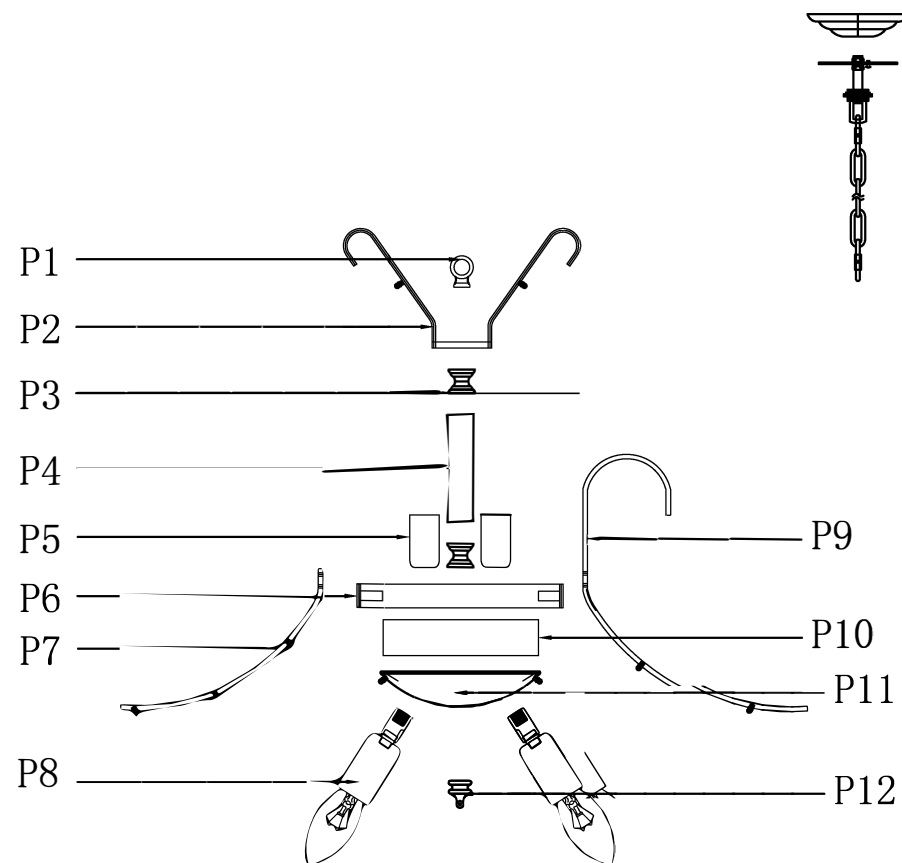

## Step 2

### Canopy Installation Instruction

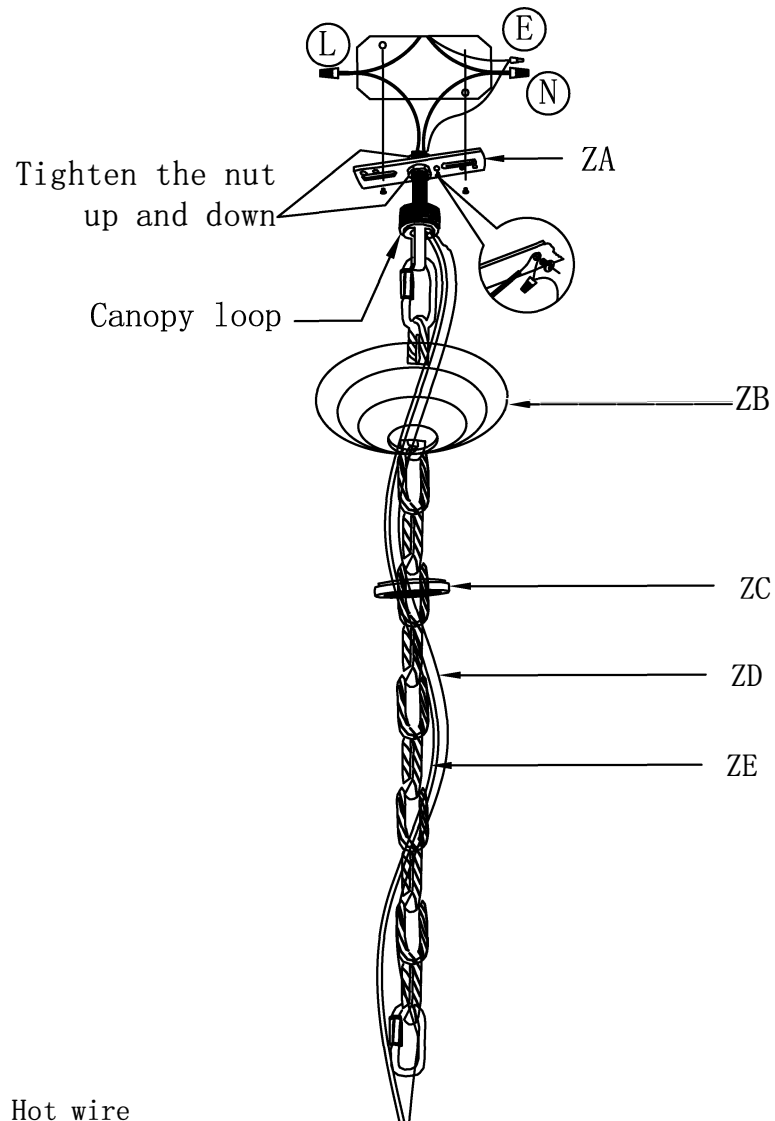

"L" = Hot wire  
"N" = Neutral wire  
"E" = Ground wire












**IMPORTANT:** Test sockets with bulb before dressing the fixture.














- 1 .Attach the crossbar to the electrical box.
- 2 .Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
- 3 .Screw 2.5" threaded pipe into the crossbar and fasten with hex-nut.
- 4 .Pull wires up through the nipple.
- 5 .Screw loop only onto threaded pipe.
- 6 .Hang the fixture on chain.
- 7 .Make the electrical connections as detailed in the drawing above.
- 8 .Secure the canopy cover with threaded canopy ring




## Step 1

Please use the parts list to ensure you are not missing any parts

PARTS LIST

part	picture	Description	Qty
ZA		4" Mounting bracket	1
ZB		5.3" Canopy cover	1
ZC		Canopy ring	1
ZD		1.59" Chain 05T Twist Design	1
ZE		Power Cord 12' SPT-1-18# Clear/Gold	1
P1		Loop	1
P2		7.8" iron branch	1
P3		3.5" Metal	2
P4		3.5" Metal column	1
P5		socket	2
P6		6.7" Metal ring	1


part	picture	Description	Qty
P7		8" short iron branch	10
P8		socket	10
P9		10.7" long iron branch	10
P10		5.1" Metal wire box	1
P11		5.1" Metal bowl	1
P12		Finial	1
A		1050-14# + 701-40#	15
B		1050-14# * 9	10
C		1050-14# + 701-40#	10
D		1050-14# * 3 + 701-40#	10
E		1050-14# * 5 + 701-40#	10
F		1050-14# * 9 + 701-40#	8
G		1050-14# * 9 + 701-40#	1

part	picture	Description	Qty
H		1050-14#*7+701-40#	10
I		1050-14#*3+701-40#	10
J		701-40#	5

## Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two(2)years from the date of purchase. Our company will at its option, repair or replace any frame that has a defect in the material or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

## Frame Assembly Diagram

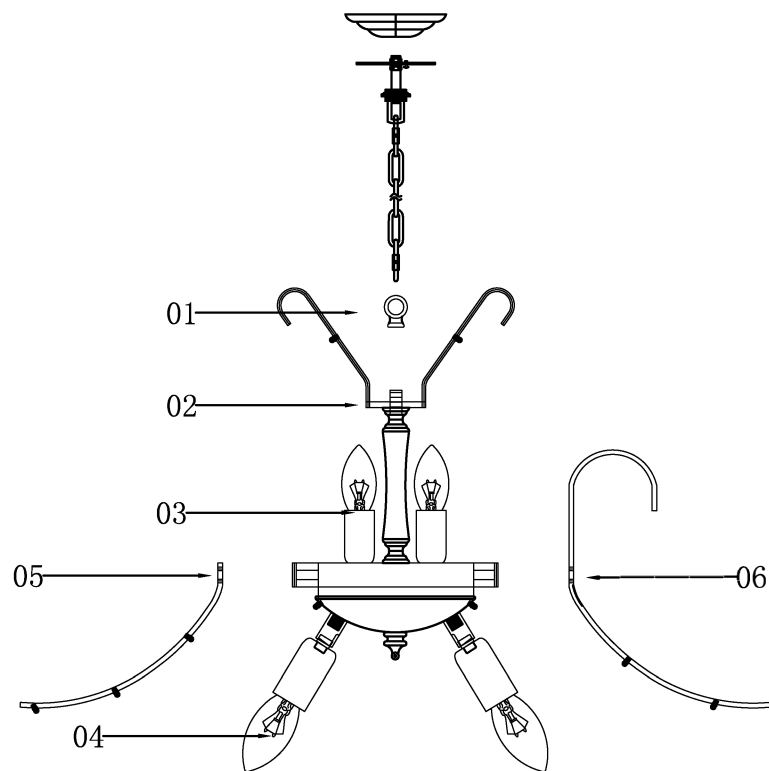

### Step 3

## Frame Assembly Instructions

#### Installation:

Please read all instructions carefully.

Before you proceed to install, make sure.

that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

Please proceed in a numerical order.


1. Hang the chain (01) on the ceiling.
2. Screw the short iron branch (03) and long iron branch (04) into the lamp body (02) pressing holes with M3\*8mm screws.
3. Screw the lamp body (02) on the chain (01) bottom ring.
4. Connect the lamp main wire of lamp body (02) with the positive and negative of 4"J-box are correct.
5. As the crystal pressing instruction, hang the crystal parts.

The end!


## Step 4 Crystal Dressing Instructions

1. Hang crystal "A" "B" "C" "D" "E" "F" "G"

## Crystal Dressing Diagram



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

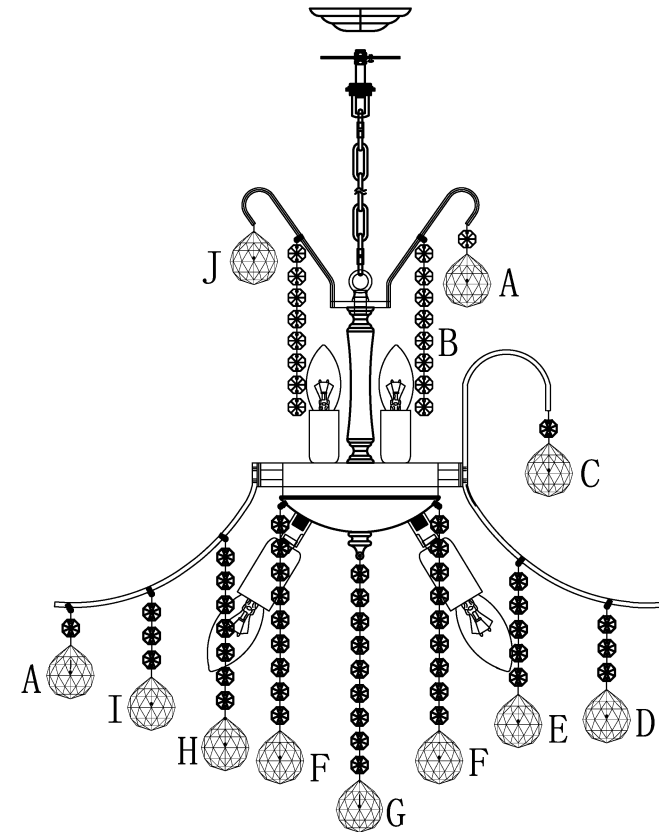

# Congratulations

You are now done installing. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

## Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean, soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

## Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

## To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased.