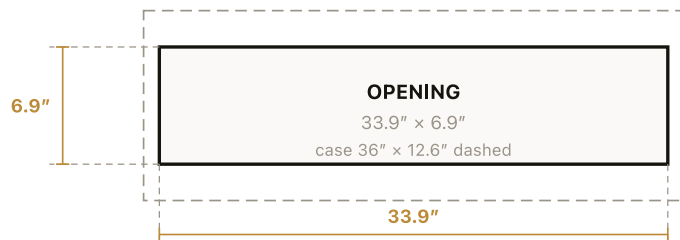


36" OUTDOOR INDUCTION GRIDDLE

BUILT-IN (NO CART)

INDUCTION
HARDWARE

Front at left

OVERVIEW

The world's first professional induction griddle. Induction heats the carbon-steel plate itself, not the air around it — full power at the surface, PFAS-free, no gas line to the patio.

KEY FEATURES

- 8,000 W total — two induction zones at 4,000 W each, four heating modules
- Three knobs, three ways to cook — single, dual-zone and bridge
- Six levels, 140–450°F · 15-minute preheat for an even surface
- 8 mm removable carbon-steel plate · PFAS-free
- Outdoor-certified 304 stainless construction
- Cookware detection — no heat without a magnetic base, zone off after 30 s
- Auto shut-off at 2 hours — knob to restart
- 12 V 10 W G9 work light
- 240 V ±10% · 40 A GFCI circuit · NEMA 14-50P cord fitted
- Lifetime Induction-Clad warranty



SPECIFICATIONS

SKU	BIG-36
Configuration	Built-in (no cart)
Installation cutout W × D × H	33.9 × 24.0 × 6.9 in [860 × 610 × 174]
Input voltage	240 V single-phase · ±10%
Included plug	NEMA 14-50P
Auto shut-off	2 hours, knob to restart
Total induction power	8,000 W · 2 zones at 4,000 W
Cooking zones	4 modules · left & right
Heating modes	Single · dual · bridge
Cooking surface	8 mm carbon steel, removable
Construction	Outdoor-certified 304 stainless
Work light	12 V 10 W G9 halogen
Clearance from backsplash	2.5 in (64 mm) min
Warranty	Lifetime Induction-Clad
Overall W × D × H	36.0 × 26.4 × 18.6 in
Required circuit	240 V · 40 A dedicated · GFCI
Temperature range	140–450°F · levels 1–6
Unit weight	105 lb
Packaged weight	138 lb
Package W × D × H	39.4 × 30.5 × 24.75 in
Certification	ETL

Installation — Drops into an outdoor counter (BIG-36) or ships on the rolling cart (BIG-36-CRT). Cutout confirmed in text; no combustible overhead construction without a compliant exhaust hood and 5 ft vertical clearance; 60 in to combustibles on all sides; 2.5 in min from backsplash.

36" OUTDOOR INDUCTION GRIDDLE · CART

WITH CART

INDUCTION
HARDWARE

OVERVIEW

The world's first professional induction griddle. Induction heats the carbon-steel plate itself, not the air around it — full power at the surface, PFAS-free, no gas line to the patio.

KEY FEATURES

- 8,000 W total — two induction zones at 4,000 W each, four heating modules
- Three knobs, three ways to cook — single, dual-zone and bridge
- Six levels, 140–450°F · 15-minute preheat for an even surface
- 8 mm removable carbon-steel plate · PFAS-free
- Outdoor-certified 304 stainless construction
- Cookware detection — no heat without a magnetic base, zone off after 30 s
- Auto shut-off at 2 hours — knob to restart
- 12 V 10 W G9 work light
- 240 V $\pm 10\%$ · 40 A GFCI circuit · NEMA 14-50P cord fitted
- Foldable side tables — 63.8 in across when extended
- Utensil hooks on the cart
- Storage shelf and door bin
- Lifetime Induction-Clad warranty



SPECIFICATIONS

SKU	BIG-36-CRT
Configuration	With cart
Cart (tables extended)	63.8 × 24.2 × 34.4 in
Griddle + Cart weight, assembled	177 lb
Griddle + Cart packaged weight	258 lb
Cart package W × D × H	39.4 × 30.5 × 65 in
Installation cutout W × D × H	33.9 × 24.0 × 6.9 in [860 × 610 × 174]
Input voltage	240 V single-phase · $\pm 10\%$
Included plug	NEMA 14-50P
Auto shut-off	2 hours, knob to restart
Total induction power	8,000 W · 2 zones at 4,000 W
Warranty	Lifetime Induction-Clad
Overall W × D × H	36.0 × 26.4 × 18.6 in
Required circuit	240 V · 40 A dedicated · GFCI
Temperature range	140–450°F · levels 1–6
Certification	ETL

Installation — Drops into an outdoor counter (BIG-36) or ships on the rolling cart (BIG-36-CRT). Cutout confirmed in text; no combustible overhead construction without a compliant exhaust hood and 5 ft vertical clearance; 60 in to combustibles on all sides; 2.5 in min from backsplash.