


WHIRLPOOL K-1111-H2

Features

- Acrylic
- For corner installation
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- 4 chromatherapy lights
- Two pillows
- Less jet trim
- 69-1/4" (1759 mm) x 69-1/4" (1759 mm) x 24" (610 mm)

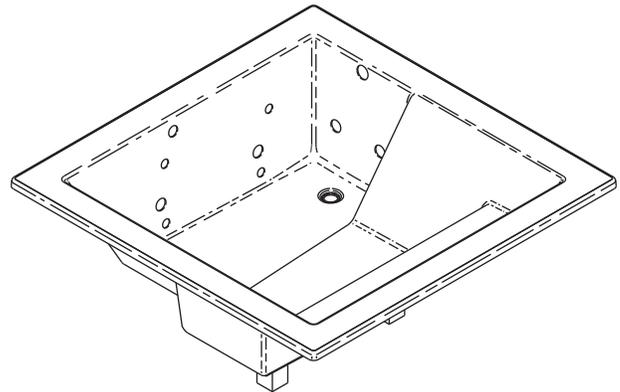

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1111-H2	Whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-9696	Trim kit – metal finishes	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7167-AF	Adjustable pop-up high volume drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-588	Undermount Kit	<input type="checkbox"/> NA		
K-1601	Footstop		<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The acrylic whirlpool shall be 69-1/4" (1759 mm) in length, 69-1/4" (1759 mm) in width, and 24" (610 mm) in height. Product shall feature a variable-speed pump with 1.5 kW heater, back-lit user control, and remote control. Product shall include two pillows. Product shall feature 6 Flexjets and 4 chromatherapy lights. Product shall be less jet trim. Whirlpool shall be Kohler Model K-1111-H2-_____.

CONSONANCE®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45" (1143 mm) x 43" (1092 mm)
Basin area, top	57" (1448 mm) x 57" (1448 mm)
Weight	300 lbs (136.08 kg)
To overflow:	
Water depth	19-1/2" (495 mm)
Capacity	170 gal (643.5 L)
* Approximate measurements for comparison only.	

Drop-in cutout dimensions:	
68" (1727 mm) x 68" (1727 mm)	

Pump:	Heater	V	A
	1.5 kW	240	11

Minimum access panel pump/control:	
34" (864 mm) W x 15" (381 mm) H	required

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 53 lbs (256 kg).

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

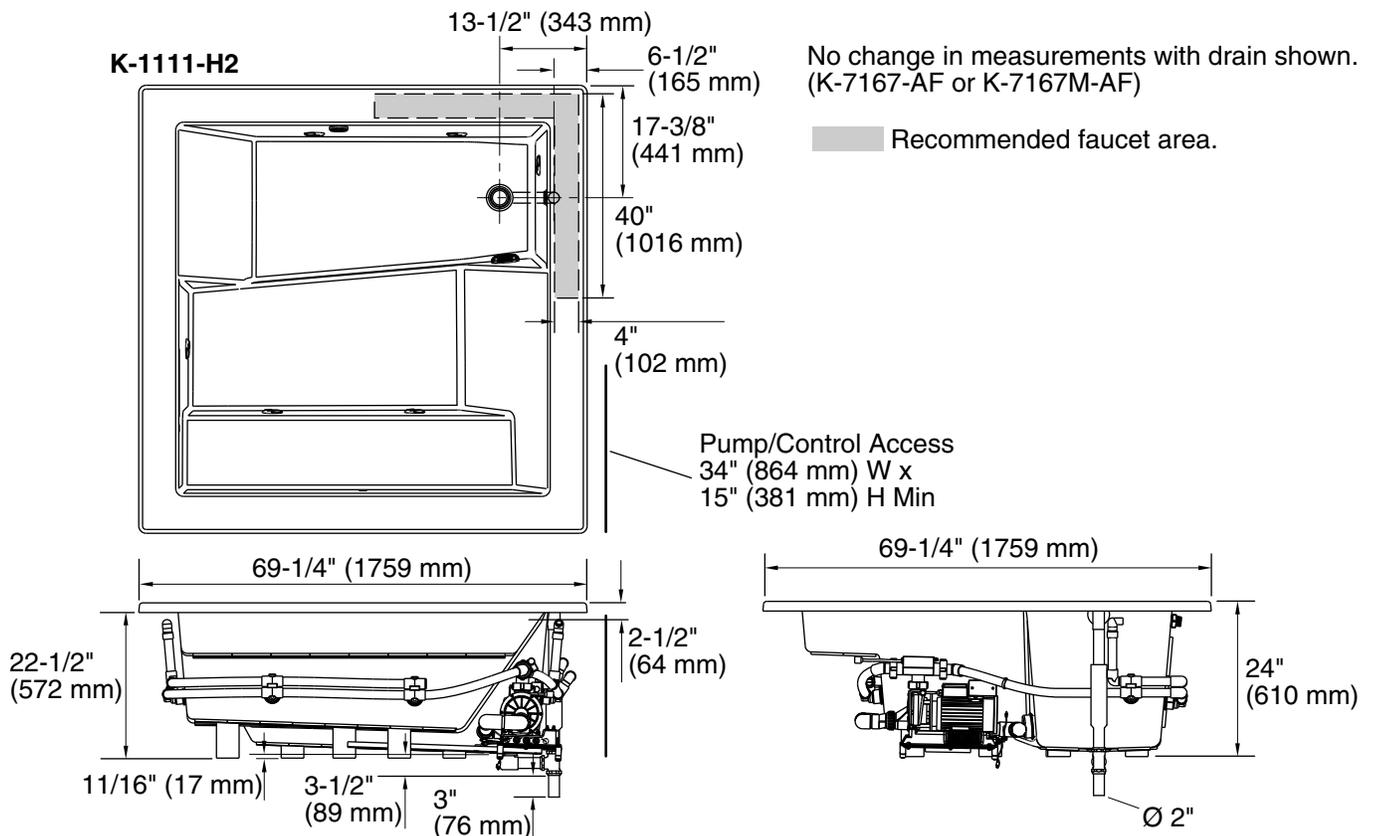

Product Diagram