

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the existing fixture and its mounting hardware from the wall.
2. Remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Install the light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

MOUNTING THE FIXTURE (Fig.2)

4. Thread one end of nipple (D) into the crossbar (C) until snug.
5. Place lock washer (B) and hex nut (A) over end of nipple (D) protruding through crossbar (C), then thread hex nut (A) until tight.
6. Attach the crossbar (C) to the junction box using the mounting screws (E) (size: #8-32N*L0.5"). The side of the crossbar marked "GND" must face out.

CONNECTING THE WIRES (Fig. 3)

7. At this point, connect the fixture wires as shown in Fig.3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the Crossbar (C) using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

FINISHING THE INSTALLATION (Fig. 2)

8. Place the back plate (F) onto nipple (D) and secure it with finial (G).

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig.1) (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


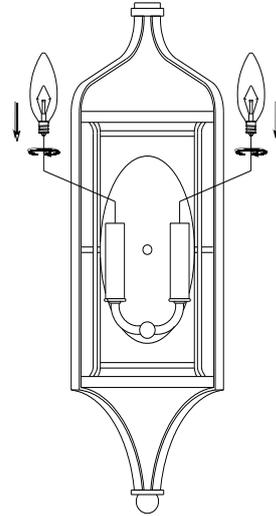


Fig. 2



Set# A-016
- Crossbar
- Ground Screw
- Mounting Screw*2

Fig. 3

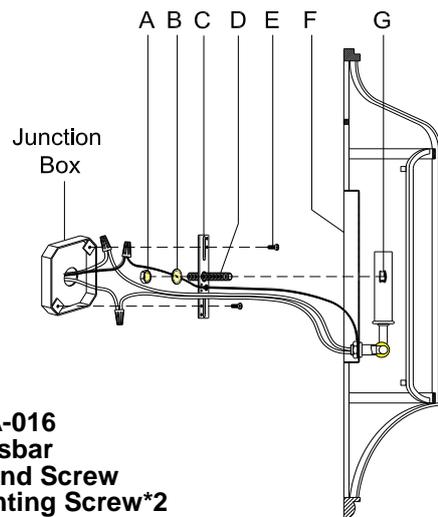