


## Installation and Wiring Instructions:

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURE

IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE

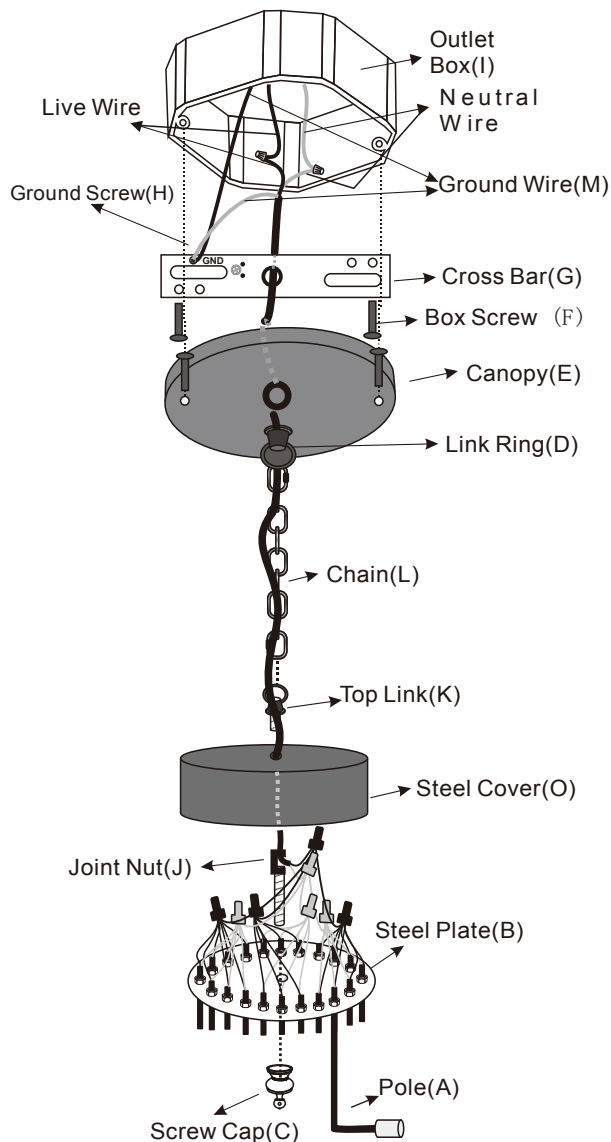

### Installation

1. Fix the 20pcs Pole(A) to the Steel Plate(B) with screw(provided on the pole) one by one according to different height carefully.
2. 7 heads parallel connected(using the black and white wire provided) as set one,another 7 heads parallel connected as set two, balance 6 heads parallel connected as set three. Then parallel connet the three sets with main cable. Pls be noted white(neutral wire) with white and black(hot/live wire) with black.
3. Fix the Top Link(K), Steel Cover(O) and Joint Nut(J) together. Pls be noted the green wire is ground wire.Then fix the Steel Plate(B) with Joint Nut(J) with Screw Cap(C).
4. Install the cross bar(or mounting plate)(G) to the outlet box(I) with box screws(F).
5. Connect the Link Ring(D) with Canopy(E).
6. Determine the proper hanging length of your fixture and remove excess chain using chain pliers.

7. Unwrap the wiring from the top of the Top Link(K). Weave the power supply cord through the chain(L),Link Ring(D), and canopy(E).
8. When you reach the ceiling, measure the wires and cut. Be certain to leave approximately 15" of additional wire length to connect to house power. Then push through the center hole in the Link Ring(D). When wires emerge above the cross bar(or mounting plate)(G),gently pull them back down out of outlet box.
9. Wiring:
  - 1). Split the conductors of the fixture wire about 4 inches. Being careful not to expose any of the wire inside of the insulation.
  - 2). Connect the fixture ground wire and the outlet box ground wire to the cross bar(or mounting plate)(G) with GREENhex-head ground screw(H) to appendix hole in cross bar(G) marked "GND".
  - 3). Connect the half of the fixture wire that is white marked(Neutral Wire) to the outlet box supply wire(White). Connect the other half of the fixture wire that is black marked(Live Wire) to the outlet box supply wire (Black or Red). Use wirenuts provided.
10. Neatly tuck the connections into the outlet box(I). Slide canopy(E) to ceiling and secure with golden ballnut(mounting screws may need adjustment of height).
11. Install light bulbs(20pcs included), restore power and check for proper operation.

Recommendation: Maximum 25 WATT Type G16.5 BULB(Pls take care when assembling as it's fragile).

Cleaning of your lamp: Turn power off.Wipe with a damp cloth.Do not use abrasives.

**\*SAVE THIS INSTRUCTION FOR FUTURE REFERENCE.  
MADE IN CHINA**