

USE AND CARE GUIDE

1 Light Flush Mount (Aged Brass Finish)

Safety Information

Before you begin, make sure you carefully read and understand the instructions in this manual. Please follow the instructions in the order presented in this manual and observe all warnings and cautions.

WARNING: To reduce the risk of fire, consult a qualified electrician before installation.

WARNING: Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.

WARNING: Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.

WARNING: Do not use the fixture on dimming circuits when using non-dimmable CFL bulbs.

WARNING: If a dimmer control switch is used with this fixture, obtain professional advice to determine the correct type to use as well as the electrical rating required.


CAUTION: All electrical connections must be in agreement with local codes, ordinances, or the National Electric Code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.

Hardware Included

NOTE: Hardware illustrated below is representative and may not be to exact scale.

Illustration	Part	Description	Quantity
	AA	Nipple	1
	BB	Ground Screw	1
	CC	Wire Connectors	3
	DD	Outlet box screws	2
	EE	Lock Washer	1
	FF	Crossbar	1
	GG	Hex nut	2

Package Contents

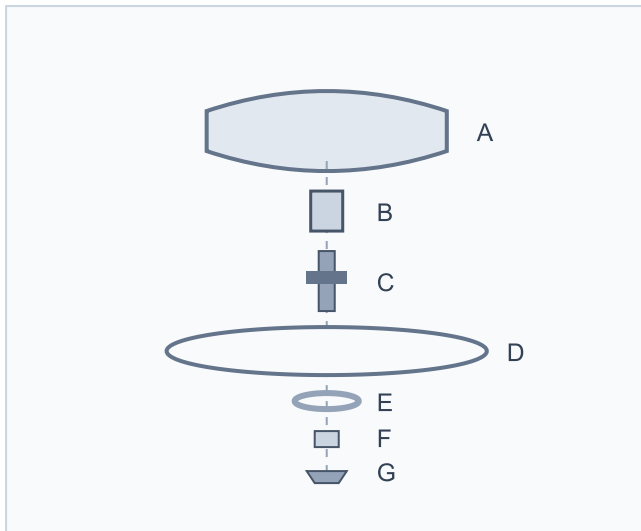

Part	Description	Quantity
A	Ceiling Pan	1
B	Coupling	1
C	Nipple with hex nuts	1
D	Glass shade	1
E	Plastic Washer	1
F	Nut	1
G	Finial	1

Installation

1 Installing the crossbar

Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

Attach the crossbar (**FF**) to the outlet box with the two outlet box screws (**DD**) as shown. The side of the crossbar (**FF**) marked "GND" must face out.

2 Thread nipple into the crossbar

Place the lock washer (**EE**) and hex nuts (**GG**) over the end of the nipple (**AA**). Thread the nipple (**AA**) into the crossbar. Secure the nipple (**AA**) by threading the upper hex nut (**GG**) tightly.

Installation (Continued)

3 Connecting the wires

NOTE: If you have electrical questions, consult your local electrical code for approved grounding methods.

While holding the ceiling pan(A) toward the ceiling, connect the electrical wires as follows: Connect the white wire from the fixture to the white wire from the outlet box, and the black wire from the fixture to the black wire from the outlet box. Cover the two wire connections using the provided wire connector(CC). Wrap the connections with electrical tape for a more secure connection.

If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it using the wire connector(CC). Otherwise, connect the copper ground from the fixture directly to the ground screw(BB) on the crossbar(FF).

4 Installing the fixture

While holding the ceiling pan(A), place the ceiling pan over the nipple(AA). Adjust the length of the other end of the nipple protruding through the center hole of the ceiling pan. Secure with the lower hex nut(GG). Thread the coupling(B) onto the end of the nipple(AA) until tight.

5 Installing the glass shade

Thread the center rod with hex nut(C) into the coupling(B). Slide the glass shade(D) upwards over the nipple with hex nut(C). While holding the glass shade(D), place the plastic washer(E) and the nut(F) over the center rod. Tighten the nut(F). Then, thread the finial(G) onto the nut(F) until tight.

Care and Cleaning

- **Shut off the main power supply** before performing any maintenance on the light.
- **To clean the outside** of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the glass and surface of the fixture.
- **To clean the inside** of the fixture, first disconnect power by turning off the circuit breaker or removing the fuse. Next, use a dry or slightly dampened clean cloth to wipe the inside glass and interior surface.
- **Do not use** any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

Troubleshooting

Problem	Possible Cause	Corrective Action
The bulb will not light.	The bulb is burned out.	Replace the bulb.
	The power is off.	Make sure power supply is on.
	There is a faulty wire connection.	Check the wiring.
	There is a faulty switch.	Test or replace the switch.
The fuse blows or circuit breaker trips when the light is turned on.	There are crossed wires or the power wire is grounding out.	Check the wire connections.