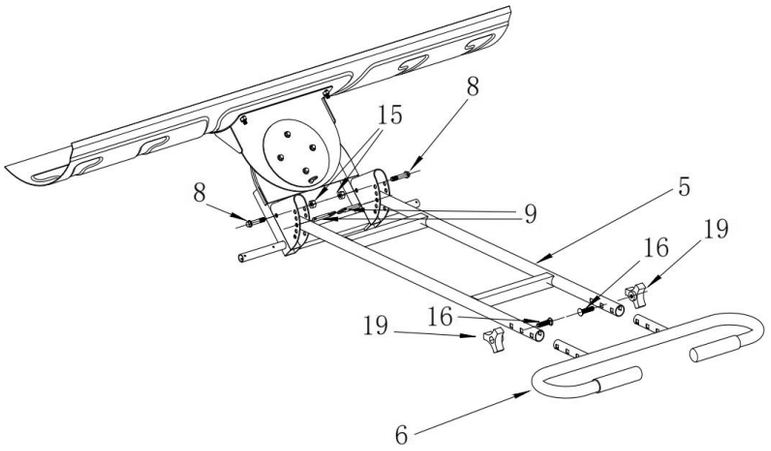
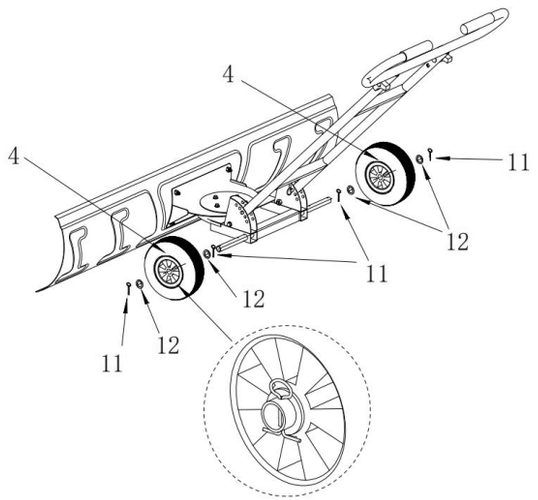
STEP 3. Connect the 5# Down handle and the 3# Wheel base assembly using 8# screws and 15# nuts as shown in the diagram. Then insert the 9# Fix pin into the adjustment hole. Finally, insert the 6# Upper handle into the 5# Down handle using two 16# and two 19#.



STEP 4. Insert the 11# Cotter pin as shown into the inner hole of the wheel axle of the 3# Wheel base assembly. Then, place the 12# washer, followed by the 4# wheel, and the 12# washer again. Finally,

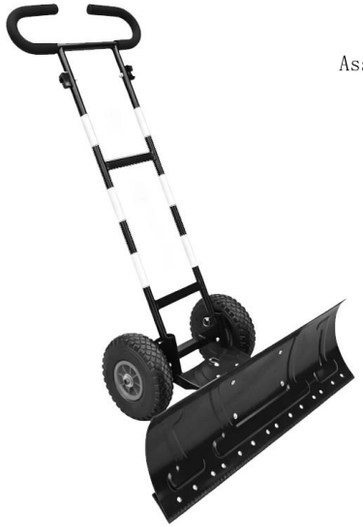
1. Insert the 11# Cotter pin into the outer hole of the wheel axle **and split both ends outward as shown. Fix in place to prevent loss.**



Note: The angle of the shovel head / the height of the handle can be adjusted by removing the plug from the 9# Fix pin.

INSTRUCTION MANUAL

Scan QR Code For Assembly Reference Video



DOUBLE-BAR WHEELED SNOW SHOVEL

IF YOU PURCHASED THE PRODUCT ONLINE AND HAVE ANY QUESTIONS OR CONCERNS PLEASE CONTACT US VIA EMAIL, TEXT, OR PHONE

EMAIL:service2outdoor@gmail.com
TEXT:+1 628-263-4608(TEXT ONLY)
PHONE:+1 877-561-6450








Date of Manufacture: 26W30

210*290mm
2026.07.14

Before You Start


1. Please read all instructions carefully.
2. Retain instructions for future reference.
3. Separate and count all parts and hardware.
4. Read through each step carefully and follow the proper order.
5. We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
6. Always place the product on a flat, steady, and stable surface.
7. Keep all small parts and packaging materials for this product away from babies and children as they potentially pose a serious choking hazard.


Parts list

1.Shovel  X1	2. Fix adjuster  X1	3. Wheel base assembly  X1	4.Wheel  X2	5. Down handle  X1
6. Up handle  X1	7. Big Circular Plate  X1	8. Flange screw (M8*40)  X2	9. Fix pin (ϕ 8*35)  X3	10. Lock nut (M6)  X8
11. Cotter pin  X4	12.Washer  X4	13. Little Circular Plate  X1	14. Button head screw (M6*20)  X8	15.Lock nut (M8)  X2
16. Round Head Square Neck Screw (M8*40)  X2	17.Wrench  X1	18.Wrench  X1	19. Plastic knob  X2	20. Reflective Sticker  X6


Assembling step

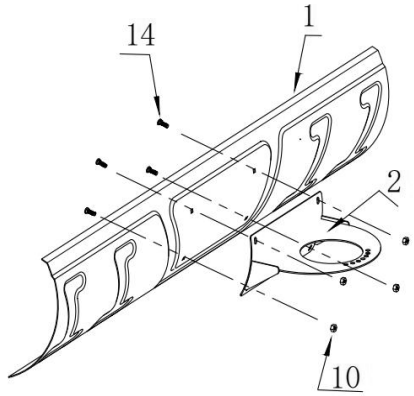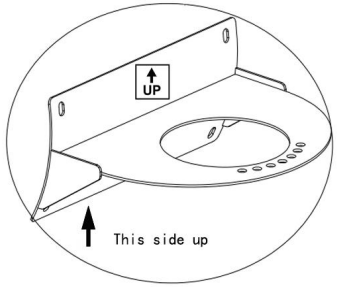STEP 1. Assemble component 1# Snow shovel and 2# Fix adjuster together using four 14# screws and four 10# nuts. **Note the installation direction of 2#.**





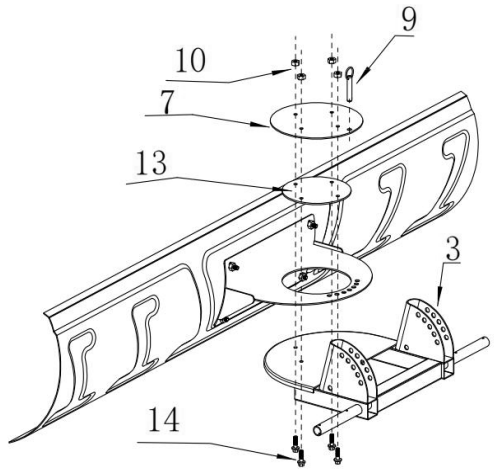STEP 2. Use four 10# screws and four 14# nuts to fix the 3# wheel base assembly and the 2# Fix adjuster (please refer to the illustration and note that 7# Big circular plate and 13# Little circular plate need to be assembled simultaneously), and then insert the 9# Fix pin into the adjustment.



Installation Sequence 14-3-2-13-7-10

Special care shall be taken to apply 13 prior to 7.