


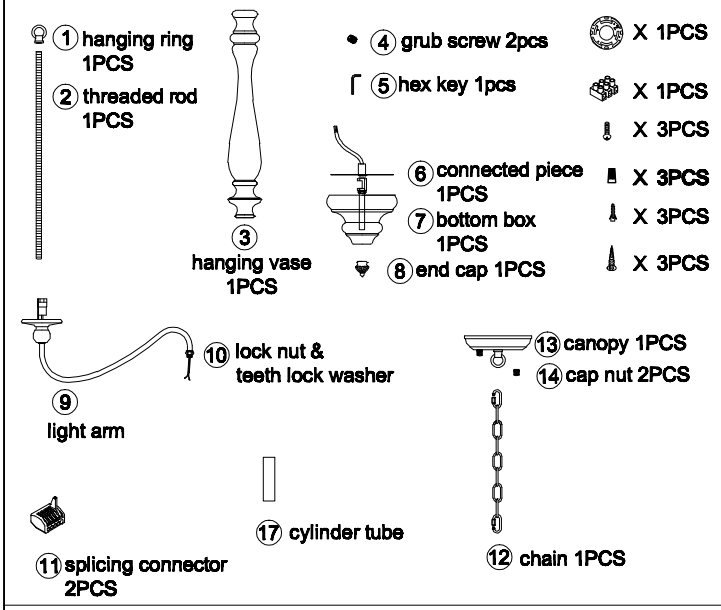


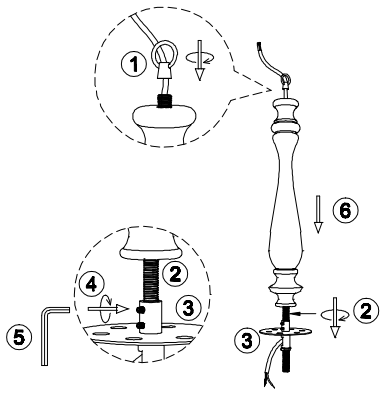

1.Let the main wire of the light fixture go through the threaded rod ②, rotate to fix threaded rod ② on the connected piece ⑥, lock it with grub screw ④ by hex key ⑤.
2.Let the hanging vase ③ go through the threaded rod ②, lock it with hanging ring ①.

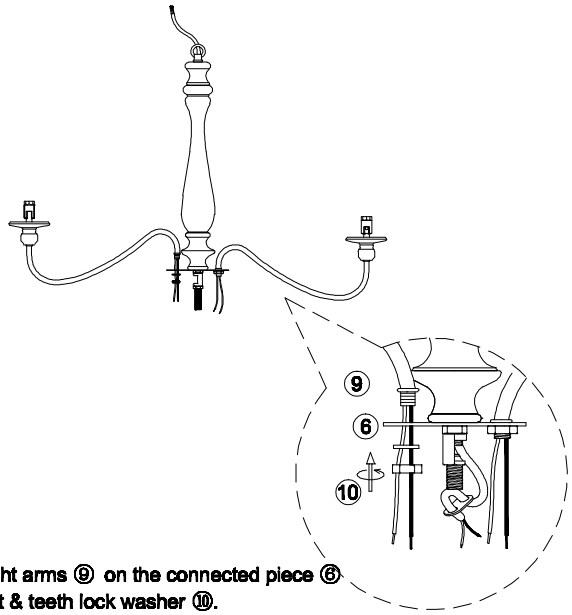


3.Install the light arms ⑨ on the connected piece ⑥ with lock nut & teeth lock washer ⑩.

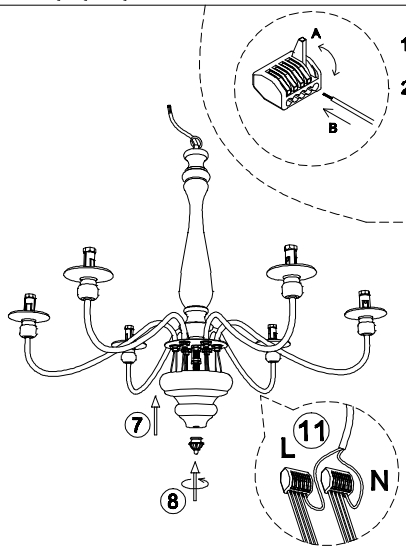


1.Pull the orange operating handleA to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)

4.Connect all the wires by parallel with connectors ⑪(all live line-L use one connector, and neutral Line-N use another connector).
5.Install the bottom box⑦ to the fixture with end cap⑧ .

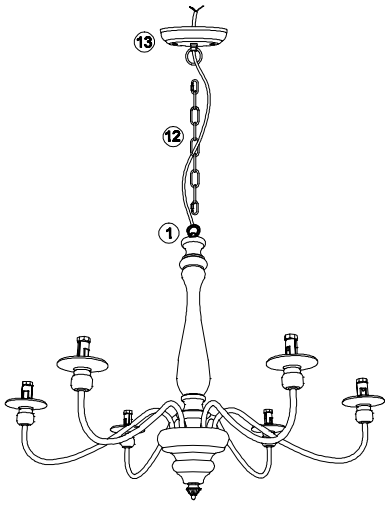

6.Connect the light fixture with canopy ⑬ with chain ⑫, let the wire go through the chain ⑫ and canopy ⑬.

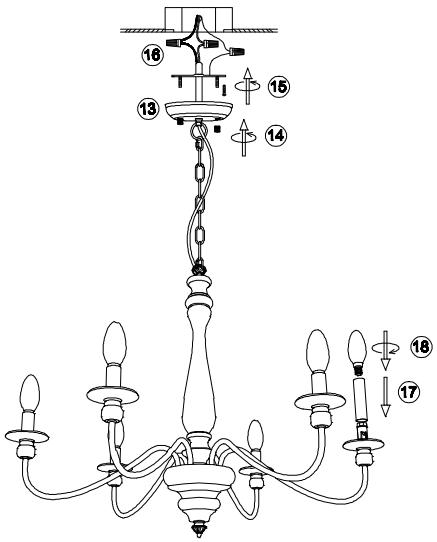

7.Install the bracket to the ceiling junction box with screw ⑮.
8.Connect the wire to your home line.
9.Install the fixture to the bracket with cap nut ⑭.
10.Put the cylinder tube ⑰ on the bulbholder and install the bulbs ⑱.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !