
Assembly Instruction (Keep this for future reference)



## IMPORTANT-PLEASE READ THESE INSTRUCTIONS FULLY BEFORE STARTING ASSEMBLY

## Contents

| Components                 | Picture      | Quantity | Components                              | Picture    | Quantity |
|----------------------------|--------------|----------|---|------------|----------|
| A:<br>Table top            |              | 1        | H:<br>Armrest                           |            | 2        |
| B:<br>Table leg            | $\checkmark$ | 3        | l:<br>Bolt(6*30MM)                      | (X)        | 8        |
| C:<br>Round leg<br>support |              | 1        | J:<br>Bolt(6*25MM)                      | (X)        | 4        |
| D:<br>Backrest             |              | 2        | K:<br>Bolt(8*34MM)                      |            | 3        |
| E:<br>Seat                 |              | 2        | L:<br>Washer,Spring<br>washer, Nut(6MM) | $\bigcirc$ | 12       |
| F:<br>Front chair leg      |              | 4        | M:<br>Washer,Spring<br>washer, Nut(8MM) |            | 13       |
| G:<br>Rear chair leg       |              | 4        | N:<br>Wrench                            | SC         | 1        |

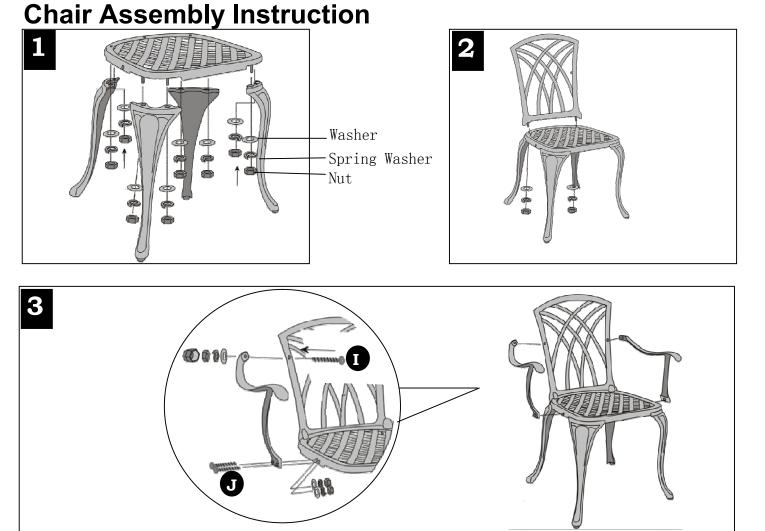


**1.**Use the big nuts and washers spring washers(M) to fix the front leg(F) and Rear legs(G) onto the seat.

**2.**Use the big nuts and washers spring washers(M) to fix Backrest(D) onto the unit.

**3.**Use Bolt(I),small nuts,spring wahsers and washers(L) to fix the armrest onto the Backrest.Use Bolt(J),small nuts,spring wahsers and washers(L) to fix the armrest onto the Seat.Then use nut covers to cover the small nuts.

Finally place the unit in the desired location. The rubber screw caps at the bottom of the four legs can be adjusted, if necessary, to make the legs level with the ground.

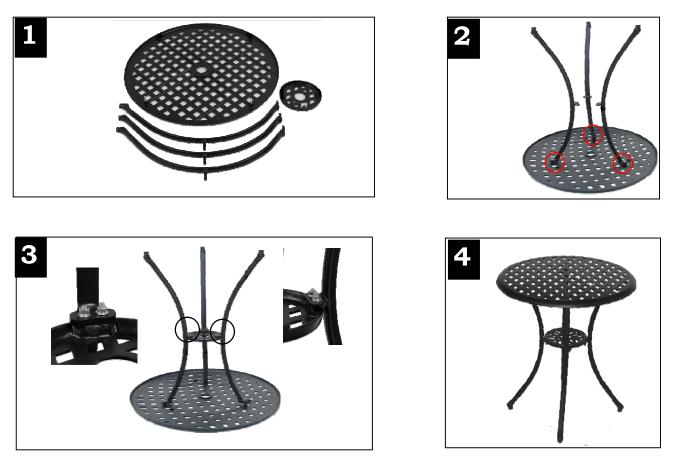

## **Table Assembly Instruction**

- 1. Turn the table top (A) upside down and place onto a soft surface.
- 2. Fit the three legs (B) to the table top (A) with the Bolt(K), washers, spring washer and nuts (M).
- 3. Attach the leg support(C) to the legs with the bolts(I), washers, spring washers and nuts (L).
- 4. Tighten all bolts and nuts securely using the wrench provided. Your table is now ready for use.