

www.biobidet.com

BBC Innovation Corporation

Head office:

205 Berg St


Algonquin, IL 30102

U.S.A



Tel: (847) 854-7292

Fax: (847) 854-1296

**Installation Manual and
Operating Instructions**
..... BB-800 & BB-1000

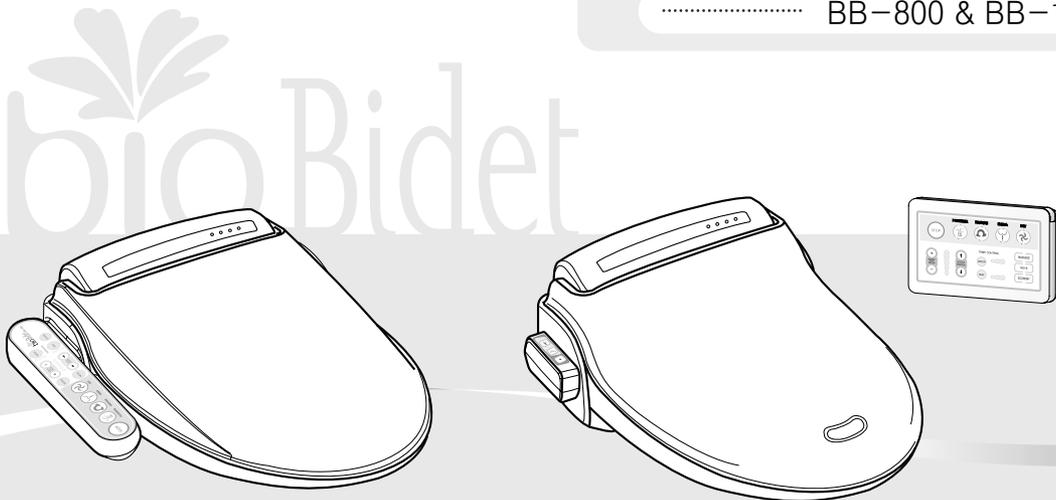

- This Product should be installed according to this manual.
- Please read this manual carefully and install properly.
- Please keep this manual for future reference.
- Please register Warranty for proper service.

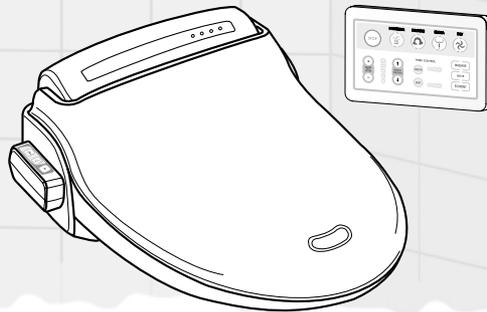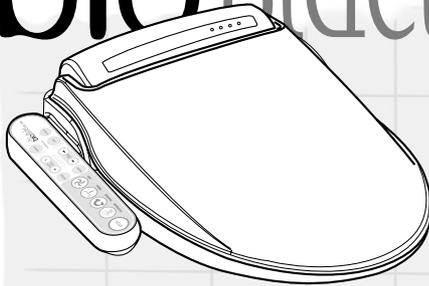 bioBidet

Thank you for purchasing Bio Bidet Advanced Toilet Seat
This unit was manufactured for household use.

6 INSTALLATION




CAUTION BEFORE INSTALLATION

- Do not plug in before installation.
- If you need an electric power system or extension, please consult a qualified electrician.

STEPS

1 Turn Off Water.

- Shut off the water supply shut off valve. Drain the toilet tank completely. Then remove the existing fill valve water supply hose.

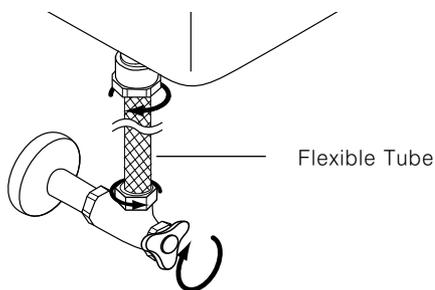


2 Removing the existing seat and lid.

- Remove mounting bolts to release existing toilet seat from toilet.




3 Connect T-Valve.

- Remove existing supply tube from fresh tank
- Connect supplied 1/2" T-Valve Adaptor. Use 3/8" conversion nut if existing shut off valve is 3/8".

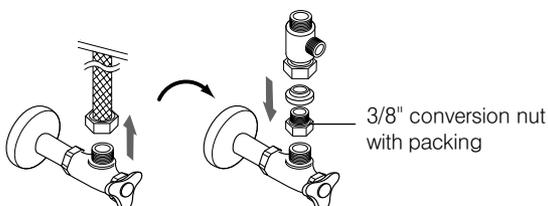

4 Water Supply to Tank Assembly.


- Connect supplied fill valve water supply hose as illustrated.



※Check for any water leaks.


5 Installation Catch Plate.

Place the plate and guides over each mounting hole. Insert the mounting bolts through the plate and mounting holes.

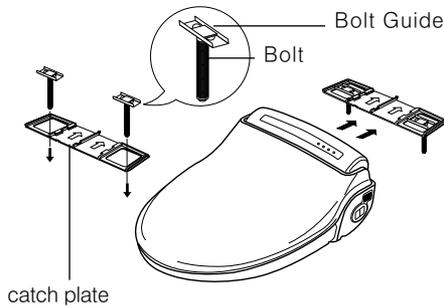


6 Bolt and Nut Assembly.

Slide cone packing and washers onto the bolts then fasten to securely mount bidet seat to toilet.

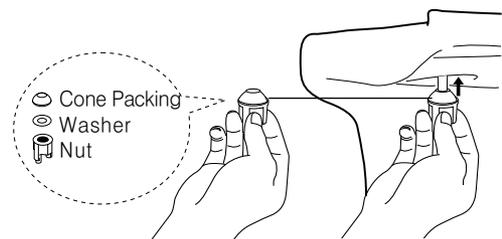


7 Assembly.

1. Slide this product onto the catch plate centering the unit with the guide arrows on the Base.
2. You will hear a click once this product is securely mounted to the catch plate.
3. This product will feel a little loose on the toilet bowl. Adjust the fit from front to back and side to side for balance.
4. Tighten the nuts on both bolts securely.

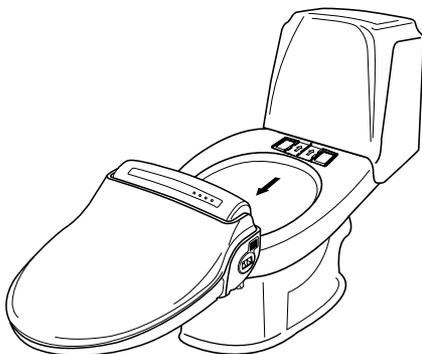

8 Water Supply Tube Assembly.

1. Connect the flexible tube from side of T-Valve to the this product.
2. Open water valve.
3. Check for leaks.
4. If there are no leaks and the surrounding area is clean and dry, connect the power cord to a ground protected power outlet.

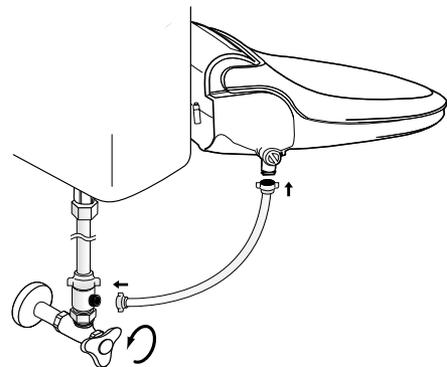


※Check for any water leaks.

6 INSTALLATION

9 Deodorizer Installation.


Insert the deodorant cartridge into the unit.
(BB- 1000 Only)

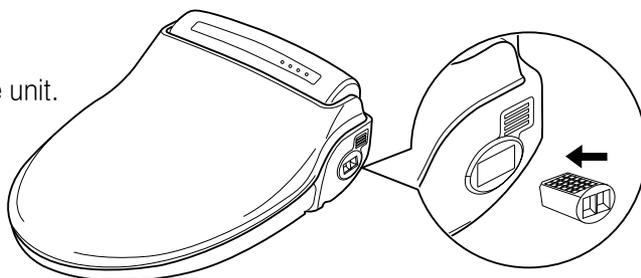

How to change the deodorant catalyst


1

- Deodorant assembly diagram.
- Follow the below photos to change the deodorant.

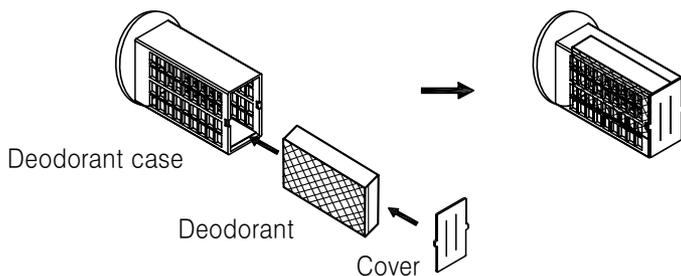

2

Insert the new deodorant case into the unit.




10

Wireless remote mounting guide. (BB-1000)




1. Remove adhesive from back of bracket and place bracket where desired.



2. Place remote into remote bracket.

Adhesive Tape





Insert supplied batteries and close battery cover

7 SEPARATION OF UNIT FROM THE TOILET BOWL

- 1 Disconnect the power plug.
- 2 Close water supply shut-off valve.
- 3 Drain water from bidet seat using drainage as illustrated.
- 4 Remove bidet seat from toilet as illustrated.
-Drainage is also release button from catch plate.

 Do not turn unit upside down.

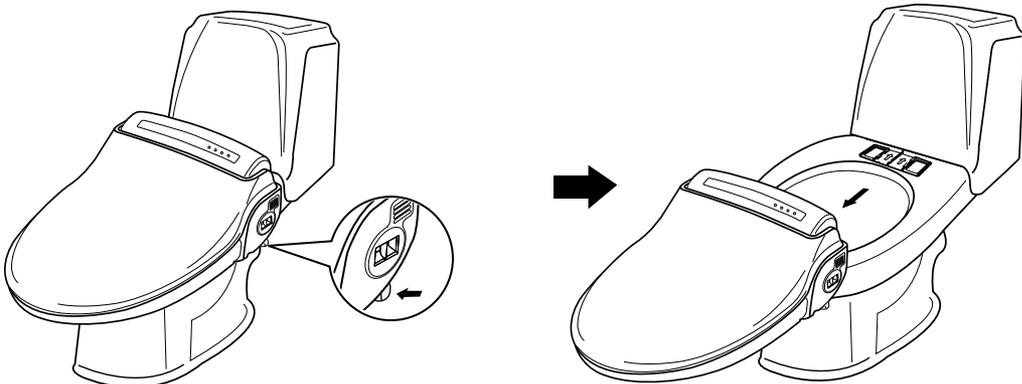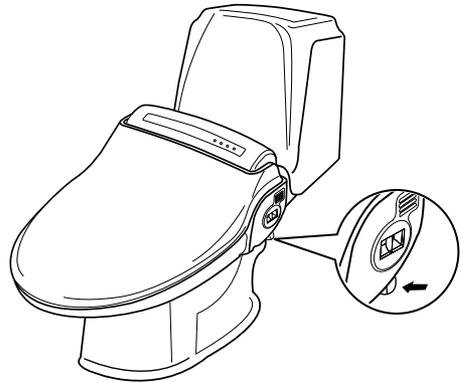

13 INFORMATION TO THE USER (For America)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

● WARNING

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Note : The manufacturer is not responsible for any Radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

For Service & Technical Support, call or write to:

BBC Innovation Corporation
205 Berg St
Algonquin, IL 30102
U.S.A

Tel: 847.854.7292
Fax: 847.854.1296
Support@biobidet.com