


Type _____

☐☐

☐☐

Catalog No.	Finish		Lamping	Dimensions (Inches)			
	White	Black		A	B	C	D
			1-75w PAR30, 65w BR30	4-7/8	7-1/4	7-3/4	2-1/2
			2-75w PAR30	5	14	7-1/4	7

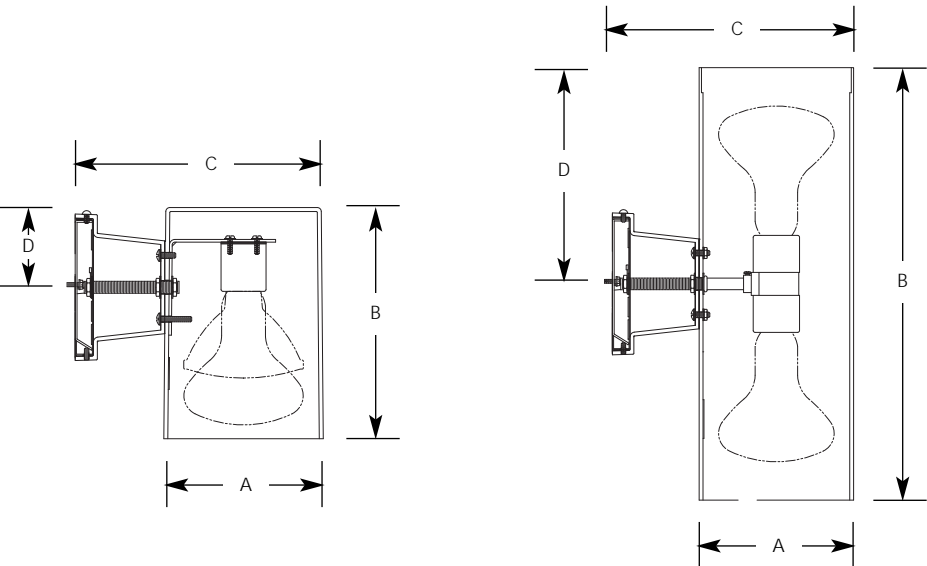

Specifications:

General

- Polycarbonate construction
- Interior or exterior use
- Non corrosive hardware supplied
- Down lighting. Shields PAR lamps to minimize glare and provide compliance with turtle laws (check local codes)
- Up/down lighting. top cover lens recommended when unit is used outdoors

Mounting

- Wall mounted
- Covers any outlet box
- Mounting bracket is 4-1/2" square
- Outlet box mounting bracket is supplied. Permits attachment of unit to wall with one almost invisible set screw

Electrical

- Medium based ceramic socket with nickel plated brass screw shell

Accessories

- top lens cover for fixture

Labeling

- UL-CUL wet location listin with cover
- UL-CUL listing for indoor use with no cover