

## 120V PENDANTS

location:  
**DRY**

### SPECIFICATIONS:

#### DESCRIPTION

Cord-hung, cable-hung or stem-mount pendant with corrugated cardboard shade and removable white acrylic shield.

#### LAMPING

**LED:** 9W Replaceable source, 120V, dimmable, 80+ CRI, 3000°K CCT, 800 lumens, 25,000 hours. Lamp included.

#### SHADE

Shade shall be of corrugated cardboard material and includes a removable white acrylic shield. 17.75" Dia. x 7.5" H

#### SUSPENSION

**Cord-hung:** 10' SVT-type cord, complete with 5" decorative sleeve at the socketholder. Jacket coordinates with metal finish. Plated stamped steel construction. Bronze or Satin Nickel.

**Stem-mount:** 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.


#### MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

#### LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.

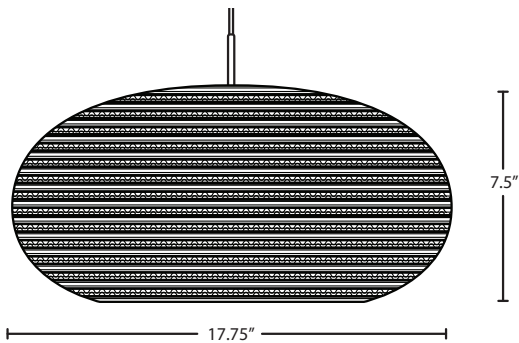

#### Project Information:

**For ordering information, see next page**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

## 120V PENDANTS

### ORDERING:

CONNECTION	LAMP OPTIONS	METAL FINISH	OPTIONS
Pendant Fixtures Dome Canopy Flat Canopy	9W LED 120V, dimmable	Bronze Satin Nickel	15' cord Low wattage labeling
Stem Fixtures Flat Canopy			<b>Ex.</b> Pendant, Satin Nickel Finish

\*Consult factory for  
multi light options

### ACCESSORIES:

#### ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

Adj. Section  
3" Section  
6" Section  
12" Section  
18" Section

#### LONGER CORD LENGTHS:

Longer cord length of 15' available.

#### LOW WATTAGE LABELING:

Incandescent fixture supplied with 16 watt relamp label.

#### CORD SLEEVES:

If concealing the cord is desired, order our 0.25" dia. metal sleeves. Each sleeve is 18" long and may be field cut.

Satin Nickel  
Bronze


#### STEMHOOKS:

Suspension hooks allow cord drops to be placed wherever desired. Suitable for sloped ceilings.

Bronze  
Satin Nickel


### PENDANT OPTIONS:

#### MONOPOINT PENDANT CANOPY



- Flat or Dome Canopy styles. Dome style allows adjustment without cutting cord.
- Suitable for sloped ceilings
- Cord: 10' SVT, 5" sleeve at socketholder (V Series utilizes SJT-type)
- Bronze or Satin Nickel

#### STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3', 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel