


NOTES:


(N1) 1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.

2 APPLY PERMANENT THREAD LOCKER (LOCTITE 680)

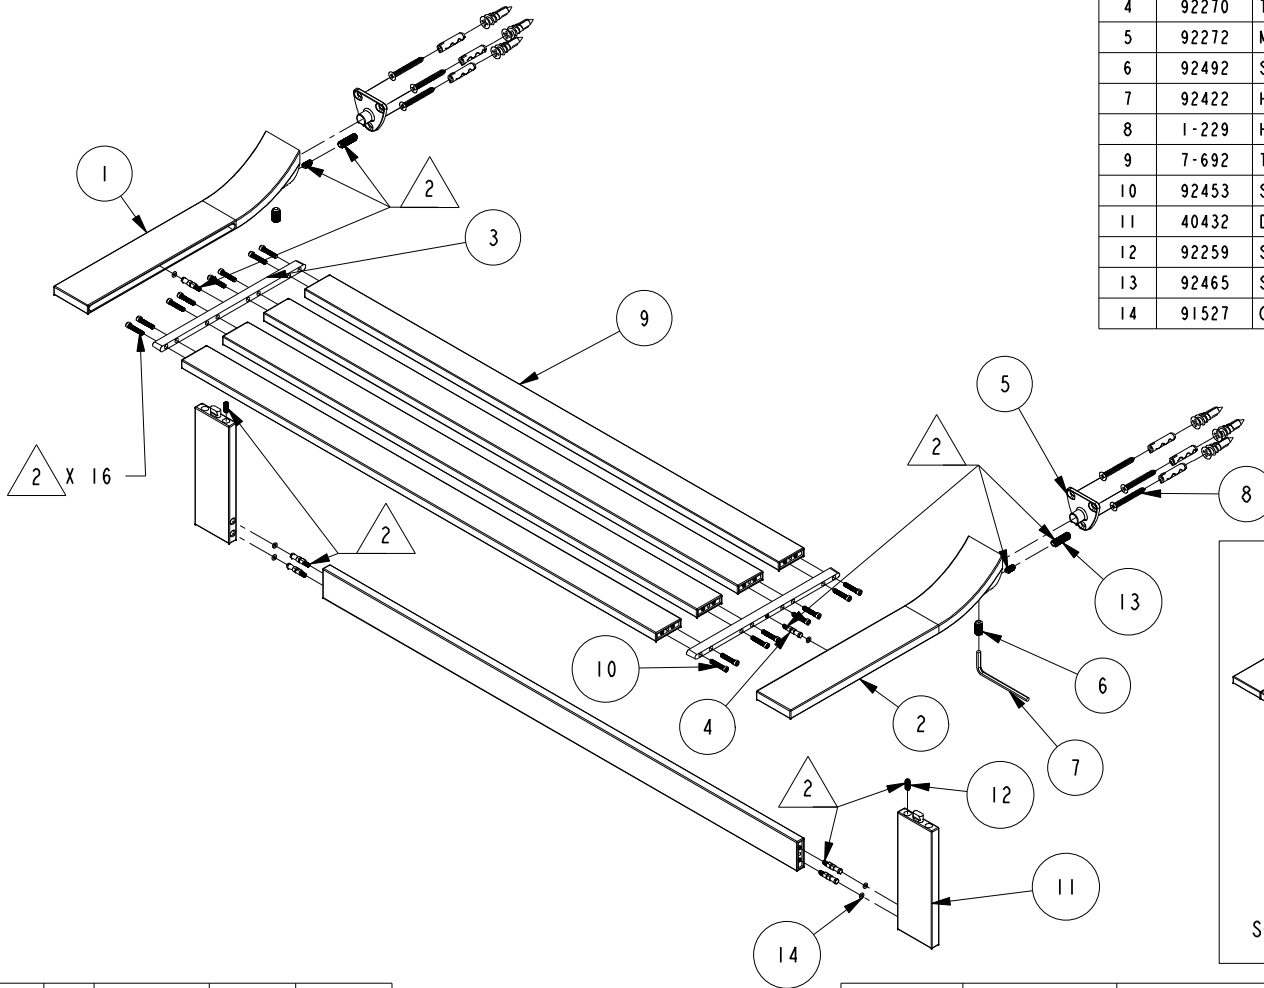

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	40433	HOTEL SHELF POST W/TOWEL BAR LEFT	PART	1
2	40434	HOTEL SHELF POST W/TOWEL BAR RIGHT	PART	1
3	40427	SIDE RAIL-LONG	PART	2
4	92270	THREADED STUD - SHORT	PART	6
5	92272	MOUNTING BRACKET	PART	2
6	92492	SCRW, 1/4-28 X 1/2 SKT HD CUP PT W/ SELF LOC SS	PART	2
7	92422	HEX KEY, 1/8" ALLOY STEEL	PART	1
8	1-229	HOTEL SHELF HARDWARE PACK	ASSEMBLY	2
9	7-692	TOWEL BAR AND INSERT ASSY	ASSEMBLY	5
10	92453	SCRW, 4-40 X 5/8 SKT HD CAP ZnPLATED	PART	16
11	40432	DOWN BAR	PART	2
12	92259	SCRW, 8-32 X 3/8 SKT HD CUP PT SS	PART	4
13	92465	SCRW, 12-24 X 3/4 SKT HD CUP PT SS	PART	2
14	91527	O-RING, 1 X 3MM ID, EPDM, 65-75 DURO	PART	6

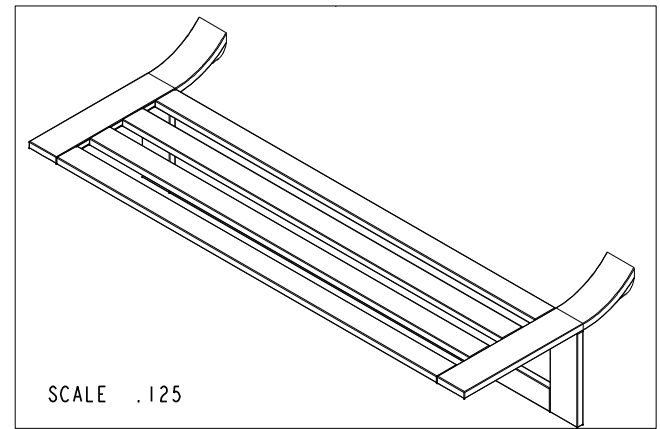

-	E	EN-4150	03/31/20	R.S.
-	D	EN-4032	12/16/19	R.S.
-	C	EN-1718	03/29/11	R.S.
-	B	EN-1701	02/17/11	J.M.
-	A	EN-1683	01/06/11	J.M.
-	-	EN-1294	11/09/10	J.M.
ZONE	REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC. THESE DRAWINGS AND THE DESIGNS DEPICTED HEREIN ARE THE PROPRIETARY PROPERTY OF BRASSTECH. ANY USE OR REPRODUCTION IS SUBJECT TO THE EXPRESS APPROVAL OF BRASSTECH. UNAUTHORIZED USE IS STRICTLY PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES		

UNITS ARE: INCHES [MM]	
TOLERANCES ARE:	
FRACTIONS DECIMALS	ANGLES
±1/16"	±1°
.X ±.1 [2.5]	
.XX ±.06 [1.5]	
(X.XXX) DENOTES CRITICAL DIMS.	
ALL THREADS ARE CRITICAL	
DRAWN	R.S.
CHECKED	J.M.
APPROVED	J.M.

BRASSTECH		2001 CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
INCORPORATED		24" HOTEL SHELF	
DWG NO.		4743-24	
SCALE .156		REF. -	SHEET 1 OF 2

