


INSTALLATION MANUAL

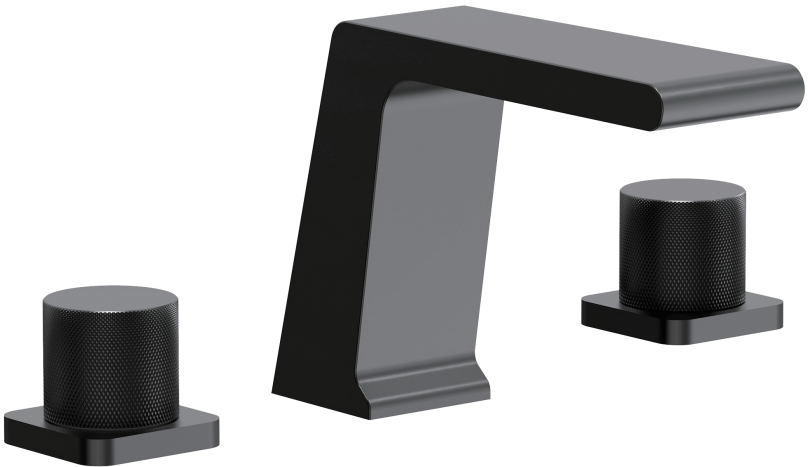

SFS1008

IMPORTANT NOTICE

- ⚠ Ensure the pipes are clear and flush or blow out debris before installation to prevent blockages.
- Please read this manual carefully before installation.
- Ensure all parts are included before starting the assembly.
- For replacement parts, please contact us using the contact information in the footer.

LIMITED LIFETIME WARRANTY

EVERSTEIN, a brand committed to the highest standards of quality and craftsmanship, provides a Limited Lifetime Warranty for its faucets. This warranty is applicable to the original purchaser and covers defects in material or manufacturing workmanship, proof of purchase will be required in the case of a claim.

For manufacture defects, EVERSTEIN will, at its option, (1) replace the defective part or product free of charge, (2) refund the original purchase price of the product (valid for 30 days from the date of delivery).

EVERSTEIN recommends installation by a licensed professional plumber. EVERSTEIN is not responsible for any damage or product failure caused by improper installation, misuse or failure to use a licensed professional.

WARRANTY COVERAGE EXCLUSIONS

This warranty does not cover defects or damage caused by the use of non-EVERSTEIN original parts. Furthermore, any damage resulting from faulty installation, product abuse, improper use, or the use of abrasive cleaners or solvents is not covered by this warranty. Labor charges and/or damage incurred during installation, repair, or replacement are also not the responsibility of EVERSTEIN.

LIMITATIONS OF LIABILITY

Except as required by law, this warranty replaces all other warranties, conditions, and guarantees, whether expressed or implied, statutory or otherwise, including but not limited to merchantability or suitability. In certain states, provinces, and countries, the exclusion or limitation of incidental or consequential damages may not apply.

RESPONSIBILITIES OF OTHERS

Inspecting the unit prior to installation is the responsibility of the installer or building contractor who acts on behalf of the user. They are responsible for ensuring the unit is free of defect or damage. In the event of a problem, the unit must not be installed. EVERSTEIN is not responsible for failures or damage that could have been discovered, repaired, or avoided by proper inspection and testing prior to installation.

Damage occurring in transit is the responsibility of the carrier. The user or installer MUST open the crate and inspect the unit for damage when it is delivered. If damage is discovered, it must be reported immediately to the EVERSTEIN and the carrier in writing.

WARRANTY SERVICE NOTE

When requesting warranty, be sure to have the following:

- Copy of original invoice
- Date of installation
- Description and pictures of defect
- Model number or description of model

To obtain warranty service and replacement part, please contact EVERSTEIN Customer Service Team. EVERSTEIN will determine whether to repair or replace your product, issue a refund.

CONTENT

1.Basin Faucet Installation Manual ----- (1-4)

CONTENIDO

1. Manual de instalación del grifo de lavabo ----- (5-8)

◆ Installation and Maintenance Matters




1. Check the accessories list to verify that all parts are complete in this package.
2. Do not disassemble the main body by yourself.
3. Connect inlet pipes to supply valves.
4. Make sure inlet pipes and supply valves have no impurities and are cleaned, with no impurities in the pipeline.
5. After installation, check all joints for leakages.
6. Do not leave the basin faucet exposed to a severely corrosive environment.

Do's



1. In order to keep the mixer surface bright, please clean the mixer regularly.
2. Rinse the faucet with clean water and wipe it with a soft cotton cloth.
3. Use one of the following cleaners to remove dirt from the surface: a. Mild liquid cleaner. b. Colorless glass cleaner and powder cleaner that do not cause abrasion and can be dissolved completely. c. Polish liquid that does not cause abrasion.

Don'ts

- a. Avoid using cleaning powder, harsh cleaning chemicals, brushes and coarse cloth to prevent scratching and friction.
- b. Do not use acid cleaners to clean the faucet as they may cause surface corrosion of the faucet. If the faucet is exposed to harmful acid substances, please rinse it immediately with water.




Tools Needed:



◆ Hot and Cold Basin Faucet Set


Accessories List

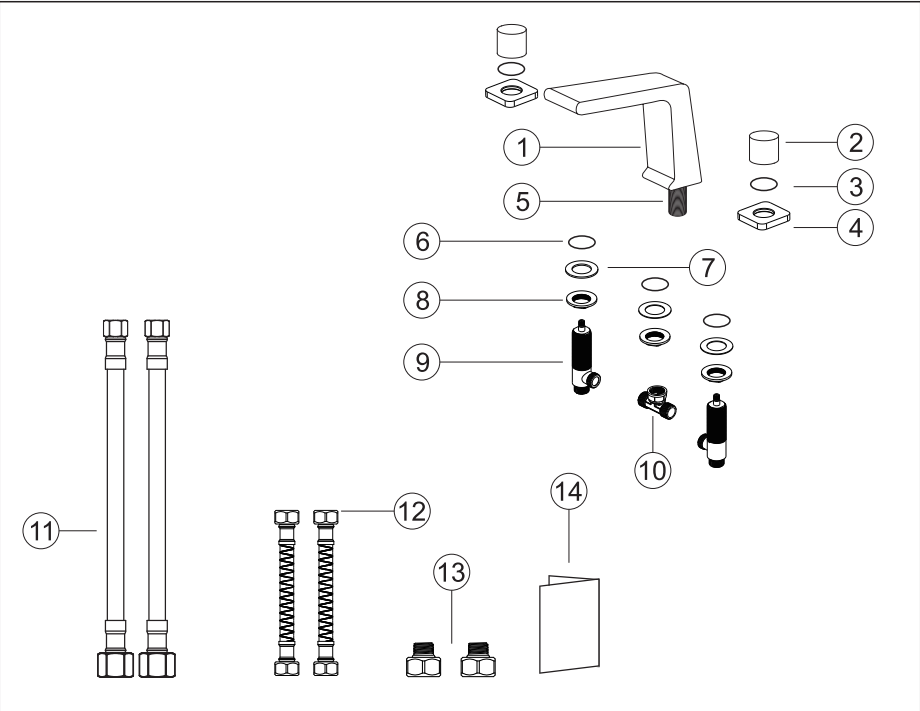

No.	Part name	Qty	No.	Part name	Qty
1	Faucet body	1	9	Control water body	2
2	Handle	2	10	Tee	1
3	O-shaped abrasion -resistant ring	2	11	Hot and cold hoses	2
4	Deck plate	2	12	Spout connector hose	2
5	Brass connector	1	13	G9/16 change to NPT1/2	2
6	O circle	3	14	Instruction manual	1
7	Tee gasket	3	15	Basin drain	1
8	Faucet body nut	3			


◆ Basin Faucet Installation

Step 1

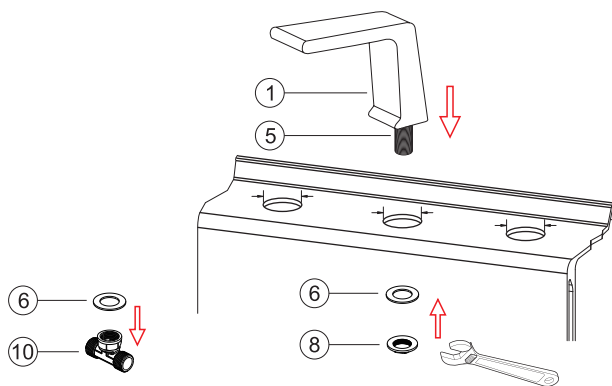

Connect Brass Part ⑤ to Faucet Body ① and insert brass part ⑤ through the basin hole. Install faucet body gasket ⑥ and Mounting Nut ⑧ in sequence, and then tighten the nut with a wrench. Next, insert Tee Gasket ⑥ into Tee ⑩ and connect Tee ⑩ to brass part ⑤.


Step 2

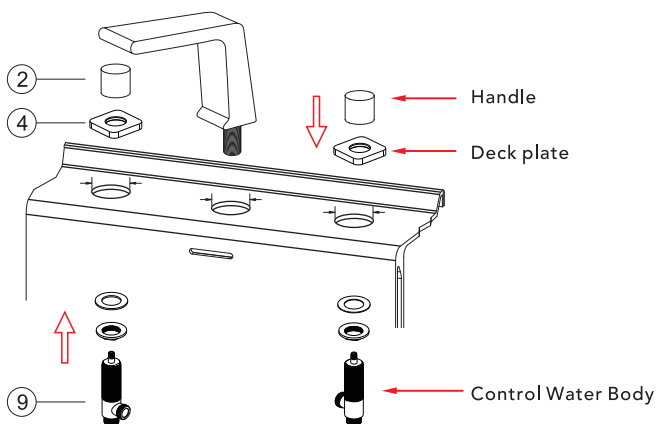

Remove the Decorative Seats ④ and place them on the basin holes. From the underside of the basin holes, connect the Control Water Bodies ⑨ to the Decorative Seats ④ and tighten them. Finally, install the Handles ② and tighten them. (Note: Do not attempt to disassemble the valve yourself, as this may cause leakage.)


◆ Basin Faucet Installation

Step 3

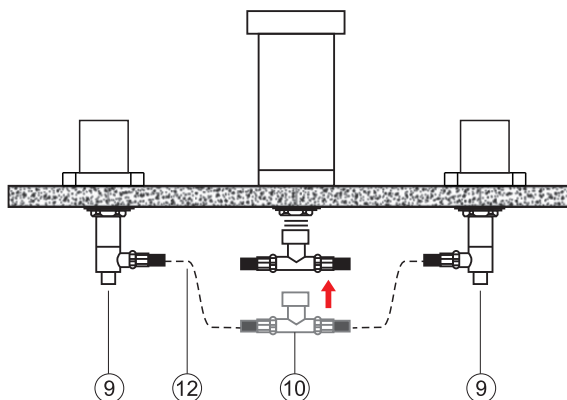

3. Connect one side of the inlet Hoses ⑫ to the Control Water Bodies ⑨ and the other side to Tee ⑩, then tighten them. Note that the red hose is for hot water and the blue hose is for cold water

Step 4

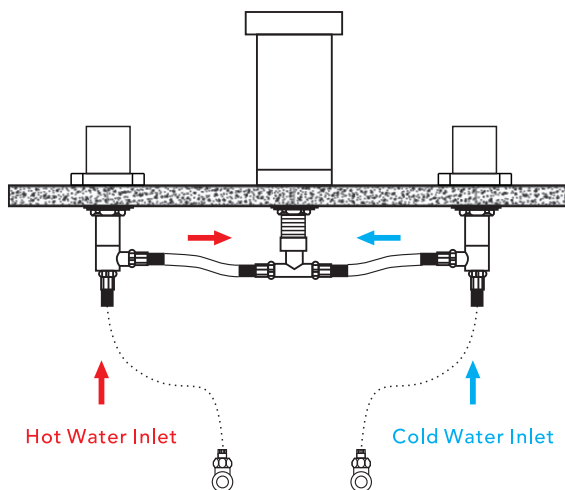

4. Connect two additional inlet hoses to the angle valves and control water bodies. Connect the hose on the left to the hot water and the hose on the right to the cold water.

◆ Instalación y cuestiones de mantenimiento





1. Verifique la lista de accesorios para comprobar que todas las partes están completas en este paquete.
2. No desmonte el cuerpo principal por sí mismo.
3. Conecte las tuberías de entrada a las válvulas de suministro.
4. Asegúrese de que las tuberías de entrada y las válvulas de suministro no tengan impurezas y estén limpias, sin impurezas en la tubería.
5. Después de la instalación, verifique todas las uniones para detectar fugas.
6. No deje el grifo para lavabo expuesto a un entorno altamente corrosivo.

Hacer



1. En para mantener la superficie de la batidora brillante, limpie el mezclador regularmente.
2. Inse el grifo con agua limpia y límpielo con un suave ropa de algodón.
3. Utilice uno de los siguientes limpiadores para eliminar la suciedad de la superficie: a. Limpiador líquido suave. b. Limpiador de vidrio incoloro y limpiador en polvo que no causen abrasión y que se puedan disolver completamente. c. Líquido pulidor que no cause abrasión.

No es decir

- A. Valte con polvo de limpieza, productos químicos de limpieza duros, cepillos y tela gruesa para evitar rascar y fricción.
- B. No use limpiadores de ácidos para limpiar el grifo, ya que pueden causar corrosión superficial del grifo. Si el grifo está expuesto a sustancias ácidas dañinas, enjuague inmediatamente con agua.




HERRAMIENTAS NECESARIAS:



♦ **Conjunto de grifo para lavabo de agua caliente y fría**


Lista de accesorios

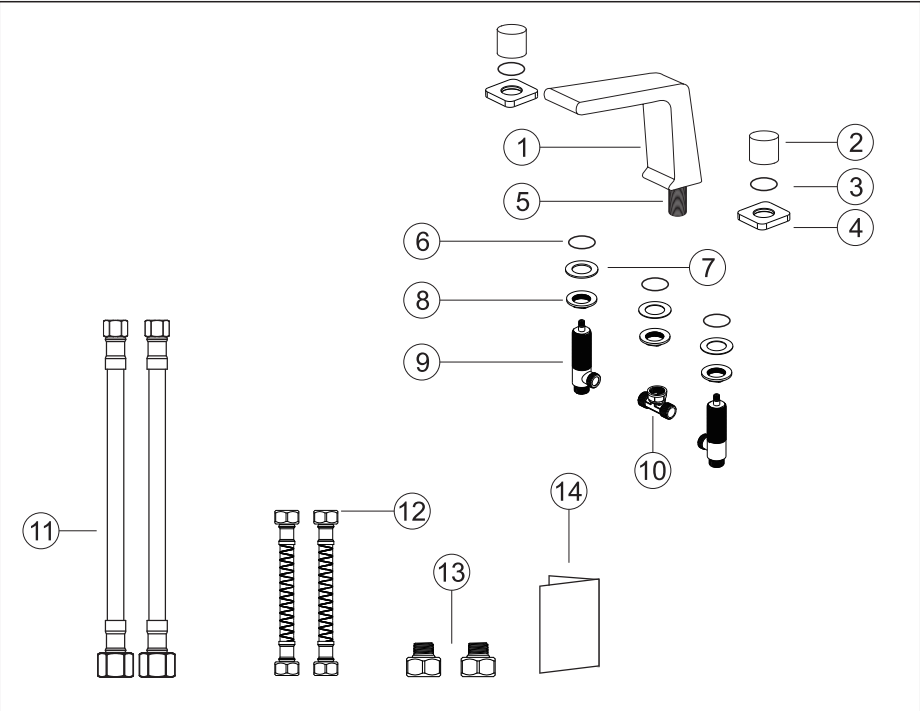

N.º	Nombre de la pieza	Cant	N.º	Nombre de la pieza	Cant
1	Cuerpo del grifo	1	9	Control del cuerpo de agua	2
2	Manija	2	10	Tee	1
3	Anillo resistente a la abrasión en forma de O	2	11	Mangueras de agua caliente y fría	2
4	Placa de cubierta	2	12	Manguera del conector del surtidor	2
5	Conector de latón	1	13	Cambio de G9/16 a NPT1/2	2
6	Anillo en O	3	14	Manual de instrucciones	1
7	Junta en T	3	15	Desagüe del lavabo	1
8	Tuerca del cuerpo del grifo	3			


♦ La instalación del grifo del lavabo

Paso 1

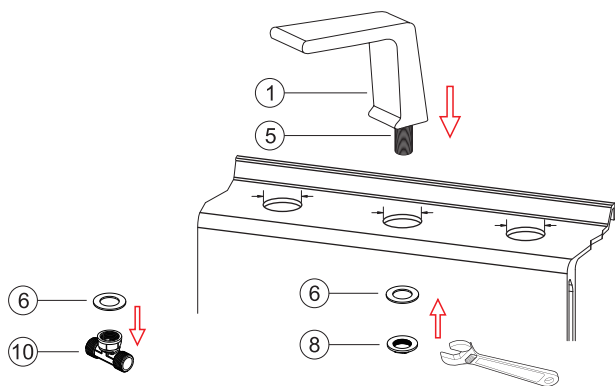

Conecte la parte de latón ⑤ al cuerpo del grifo ① e inserte la parte de latón ⑤ a través del orificio del lavabo. Instale la junta del cuerpo del grifo ⑥ y la tuerca de montaje ⑧ en secuencia, y luego apriete la tuerca con una llave. A continuación, inserte la junta en T ⑥ en la Tee ⑩ y conecte la Tee ⑩ a la parte de latón ⑤.


Paso 2

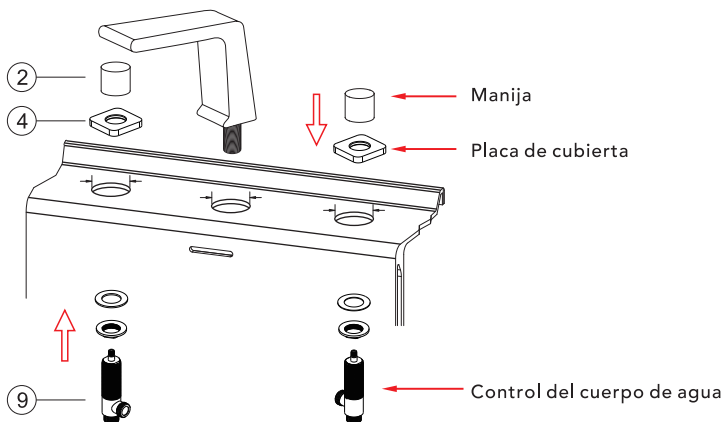

Retire los asientos decorativos ④ y colóquelos en los orificios del lavabo. Desde la parte inferior de los orificios del lavabo, conecte los cuerpos de control de agua ⑨ a los asientos decorativos ④ y apriételos. Finalmente, instale las manijas ② y apriételas. (Nota: No intente desmontar la válvula usted mismo, ya que esto puede causar fugas).


♦ La instalación del grifo del lavabo

Paso 3

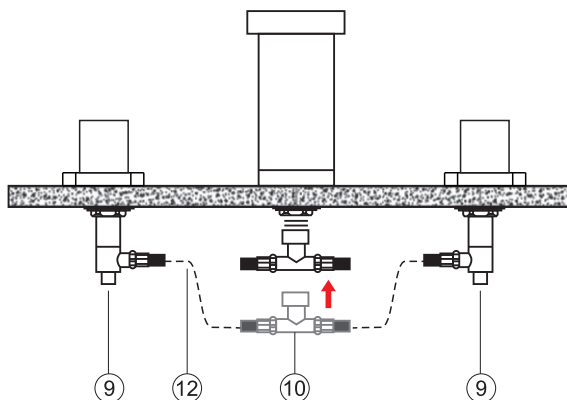

3. Conecte un lado de las mangueras de entrada 12 a los cuerpos de control de agua 9 y el otro lado al conector en T 10, luego ajústelos. Tenga en cuenta que la manguera roja es para agua caliente y la manguera azul es para agua fría.

Paso 4

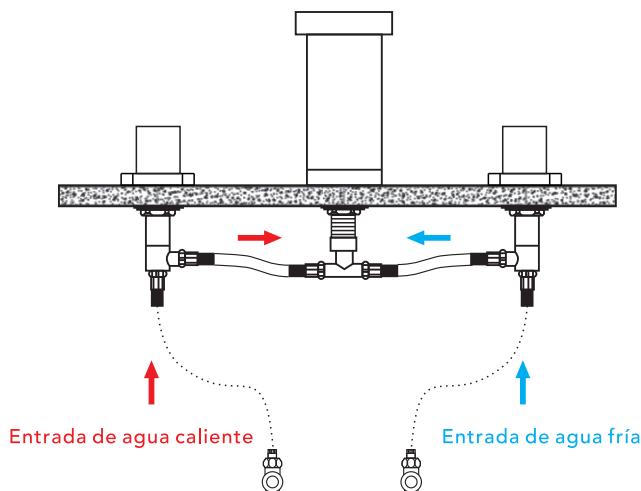

4. Conecte dos mangueras de entrada adicionales a las válvulas de ángulo y a los cuerpos de control de agua. Conecte la manguera de la izquierda al agua caliente y la manguera de la derecha al agua fría.