




1.Combine the split light fixture together and fasten it with screw ②.

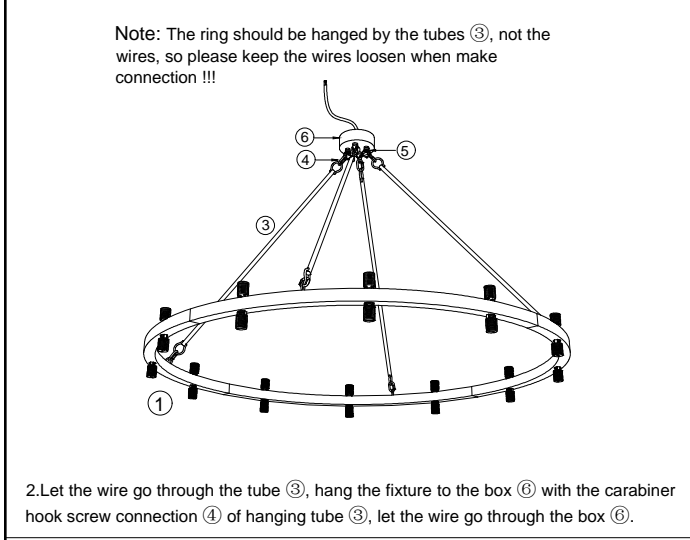


2.Let the wire go through the tube ③, hang the fixture to the box ⑥ with the carabiner hook screw connection ④ of hanging tube ③, let the wire go through the box ⑥.

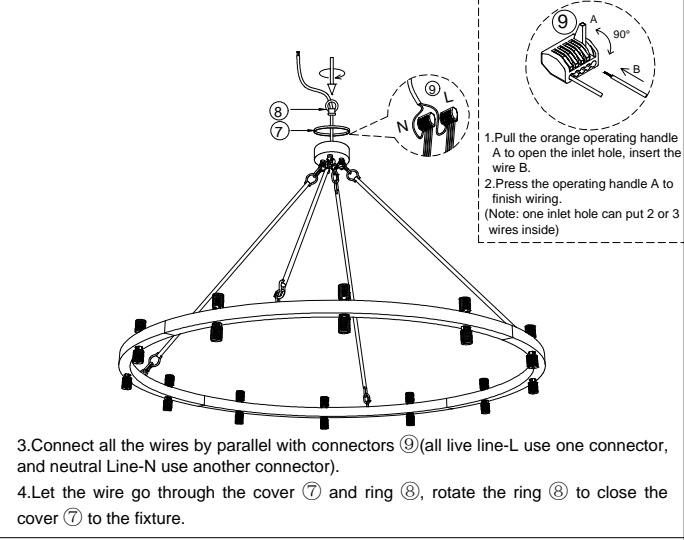

3.Connect all the wires by parallel with connectors ⑨(all live line-L use one connector, and neutral Line-N use another connector).
4.Let the wire go through the cover ⑦ and ring ⑧, rotate the ring ⑧ to close the cover ⑦ to the fixture.

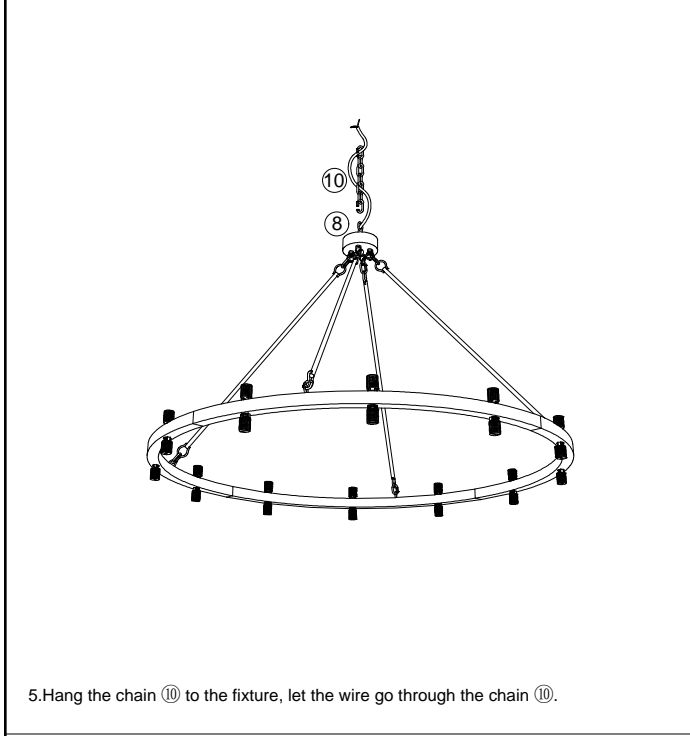

5.Hang the chain ⑩ to the fixture, let the wire go through the chain ⑩.

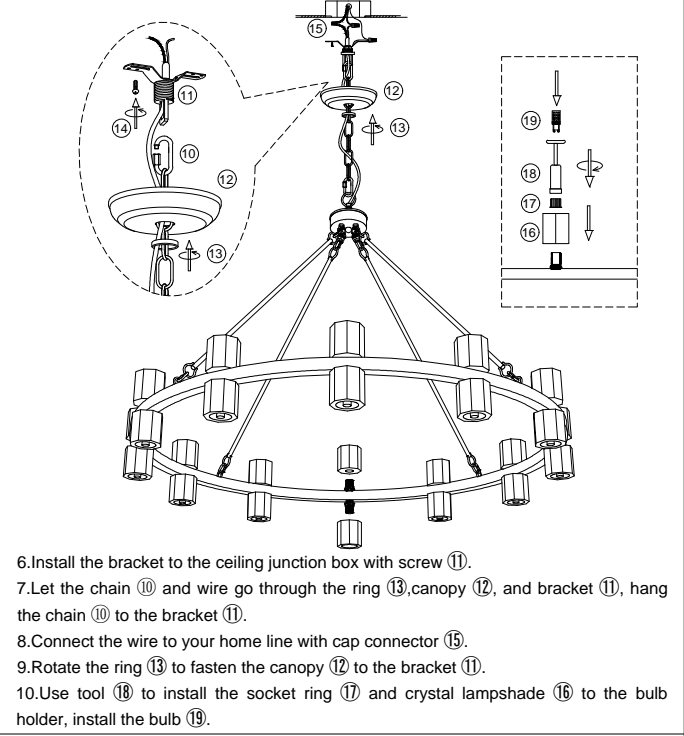

6.Install the bracket to the ceiling junction box with screw ⑪.
7.Let the chain ⑩ and wire go through the ring ⑬,canopy ⑫, and bracket ⑪, hang the chain ⑩ to the bracket ⑪.
8.Connect the wire to your home line with cap connector ⑮.
9.Rotate the ring ⑬ to fasten the canopy ⑫ to the bracket ⑪.
10.Use tool ⑱ to install the socket ring ⑰ and crystal lampshade ⑯ to the bulb holder, install the bulb ⑲.

D7022-9+9 / D7022-12+12 / D7022-16+16 /D7022-20+20

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !