


GROUND LIFT AND TILT TABLE, ZLTT-5252-2-36

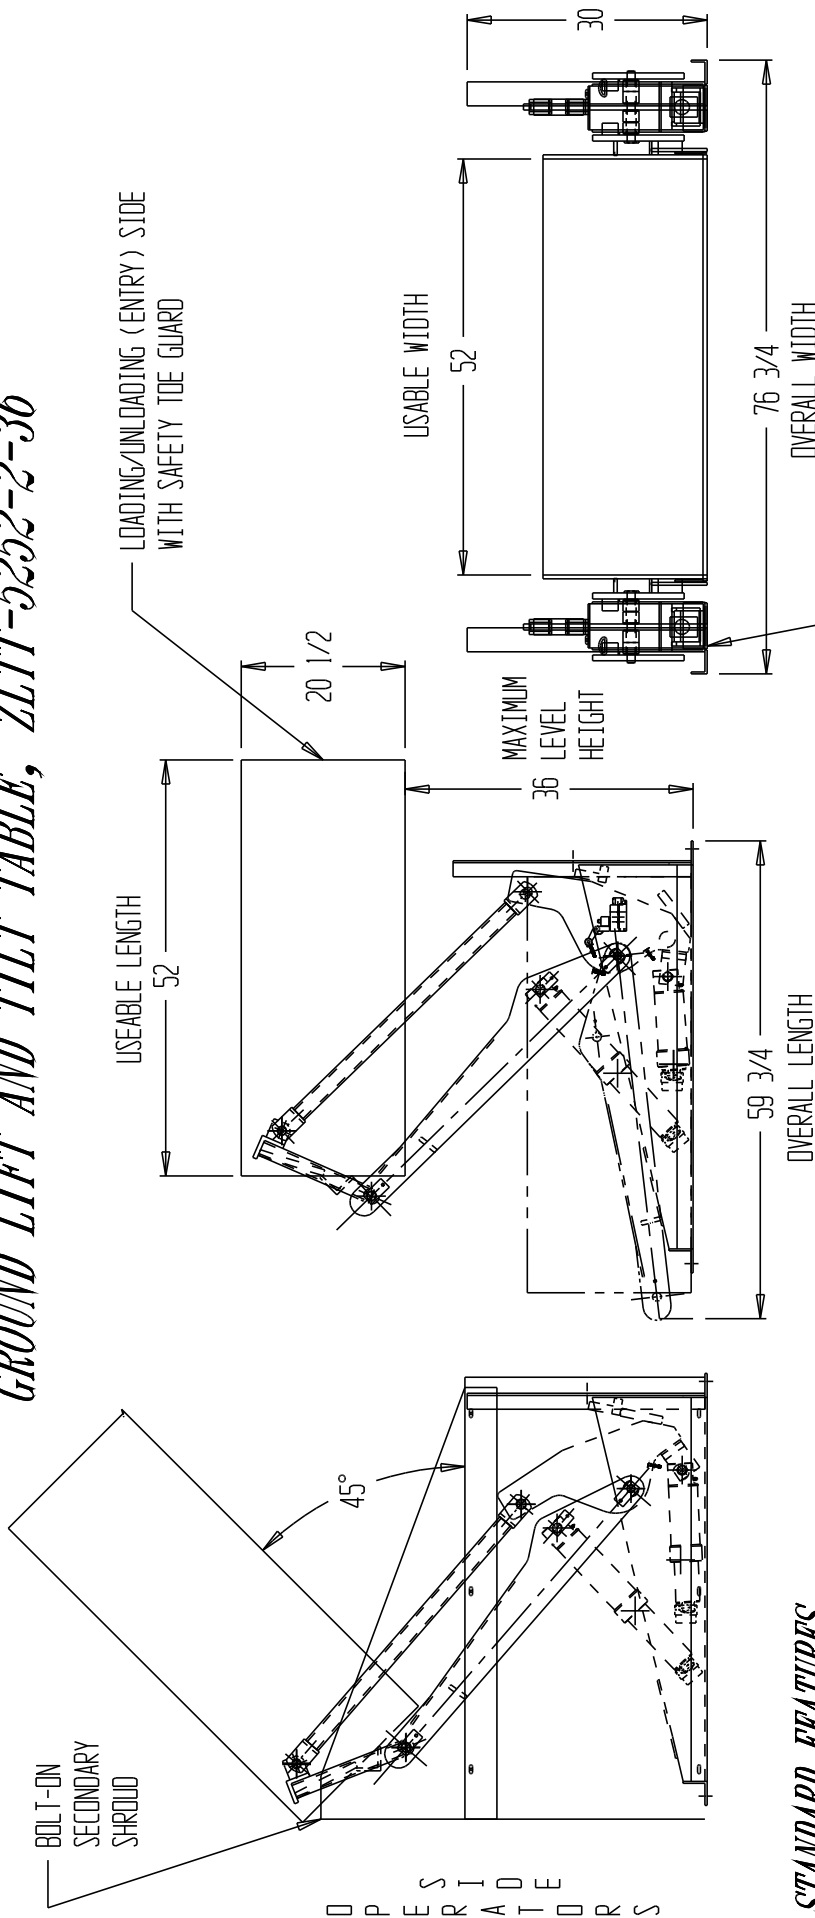

STANDARD FEATURES

- MODEL NUMBER IS ZLTT-5252-2-36
- USABLE WIDTH IS 52 INCHES
- USABLE LENGTH IS 52 INCHES
- CAPACITY IS 2,000 POUNDS (EVENLY DISTRIBUTED LOAD)
- LOWERED HEIGHT IS 1/2 INCH WITH BEVELED ENTRY
- MAXIMUM LEVEL HEIGHT IS 36 INCHES
- MAXIMUM TILT ANGLE IS 45 DEGREES
- OVERALL WIDTH IS 76 3/4 INCHES (USABLE PLUS 24 3/4 INCHES)
- OVERALL LENGTH IS 59 3/4 INCHES (USABLE PLUS 7 3/4 INCHES)
- 24V CONTROL IS STANDARD HAND HELD ON 8 FOOT CORD
- SAFETY TOE GUARDS ON FRONT (LOADING SIDE) OF DECK
- PAINTED BLUE

PLEASE CIRCLE SPECIFICATIONS:

POWER	AC	DE VOLTAGE	460
MOTOR VOLTAGE	115	200	230
DEDICATED CIRCUIT REQUIRED			
MOTOR PHASE	SINGLE	THREE	
CONTROL	HAND	FOOT	

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

() As drawn () As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MFG

P.O.#: -

V.O.#: -

SALES: -

DATE: -

SCALE: -

DRWG./FILE NAME:

04-007-031

Any additions, deletions or omissions must be corrected on this drawing, as this drawing will be considered all inclusive.

All graphics provided are for reference only. If certain dimensions are critical please verify those dimensions with your salesperson.