








Assembly Manual
Dining Chair

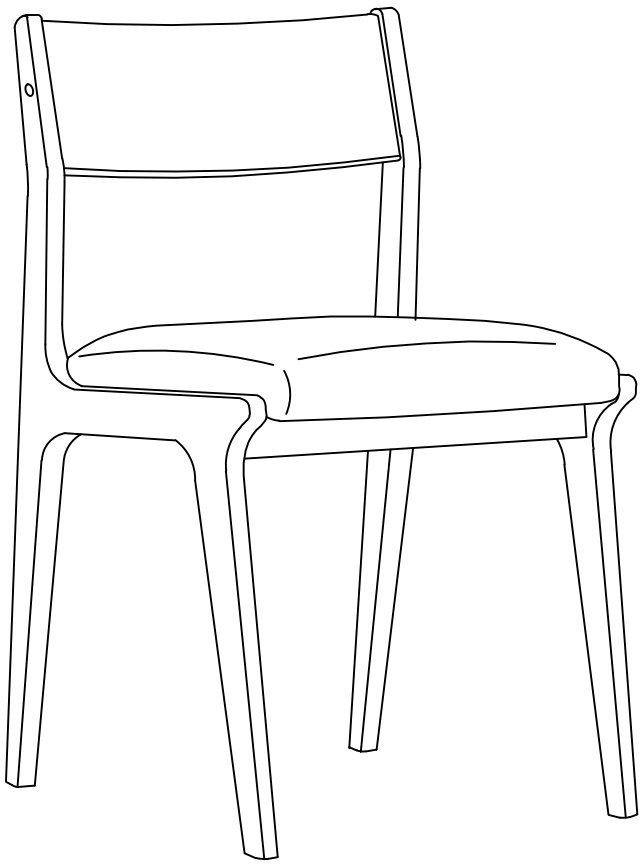

⚠ CAUTION


THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.
PLEASE READ AND KEEP FOR FUTURE REFERENCE.

A x 1  Left Leg	B x 1  Right Leg	C x 1  Backrest	D x 2  Front & Back Rail
E x 1  Center Rail	F x 1  Seat	H1 x 6  M6 x 60mm Long Bolt	H2 x 2  M6 x 40mm Short Bolt
H3 x 8  5/16" Spring Washer	H4 x 1  M4 Allen Wrench	H5 x 18  M8 x 30mm Wood Dowel	H6 x 2  M4x 38mm CSK Screw
H7 x 4  22mm PVC Nail	H8 x 2  Wooden Plug	 Extra Hardware	 Not Included


Before you begin:

1. Check if you have received all parts using the diagram on this page. Do not start the assembly process until all parts are present. If you have not received all parts or received wrong or damaged ones, please contact our customer service and we will get back to you.
2. Do not discard any of the packaging until you are certain that you have all the necessary parts for the assembly.
3. Do NOT use power tools for assembly.


1. Insert the Wood Dowels (H5) to the Backrest (C) , Front & Back Rails (D)and Center Rail (E).

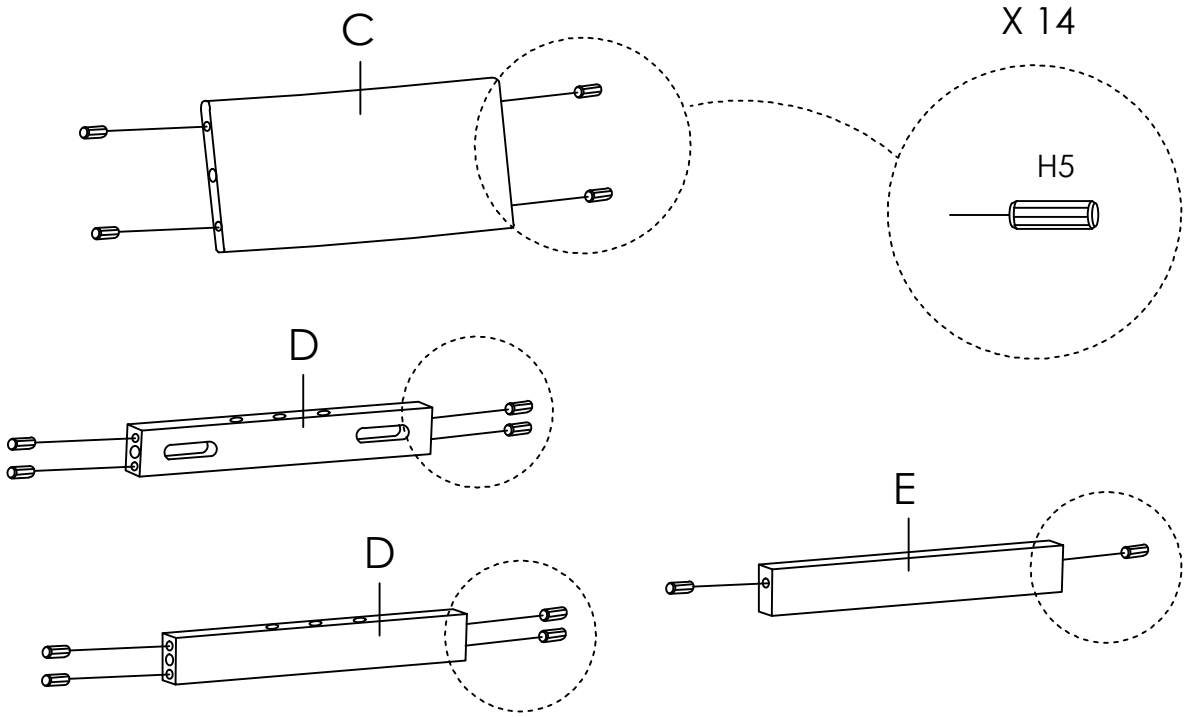


2. Unfasten the screws and remove the attached support rail from Left Leg (A) and Right Leg (B).

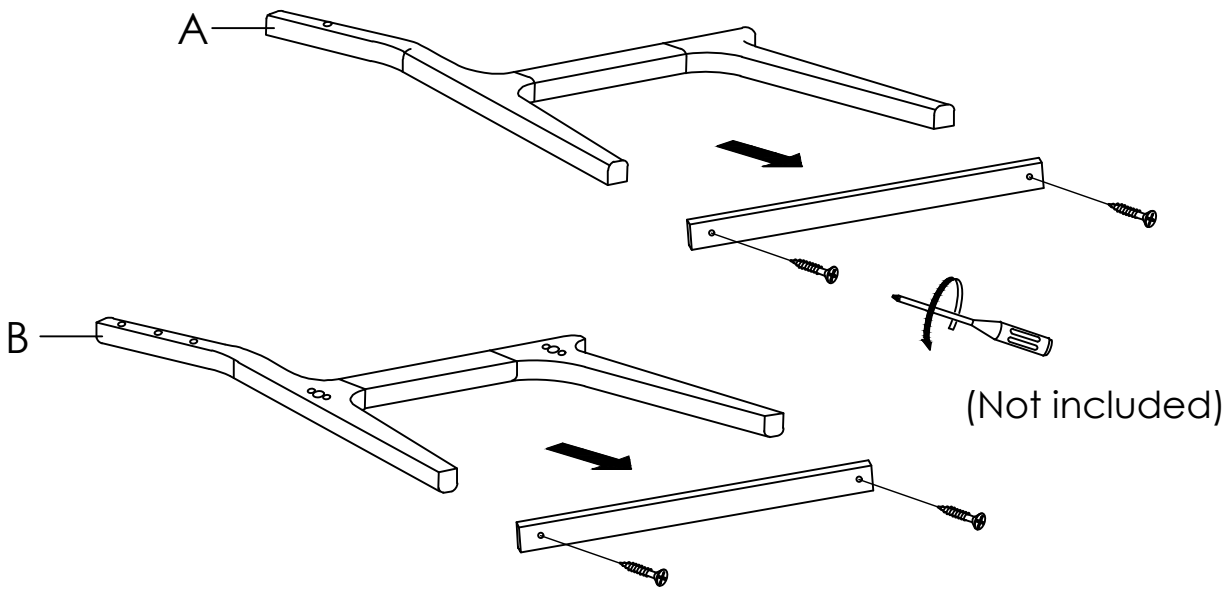

3 Attach the Backrest (C) to the Left Leg (A), using Spring Washers (H3) , Short Bolts (H2) and Allen Wrench (H4). **Do not fully tighten yet.**

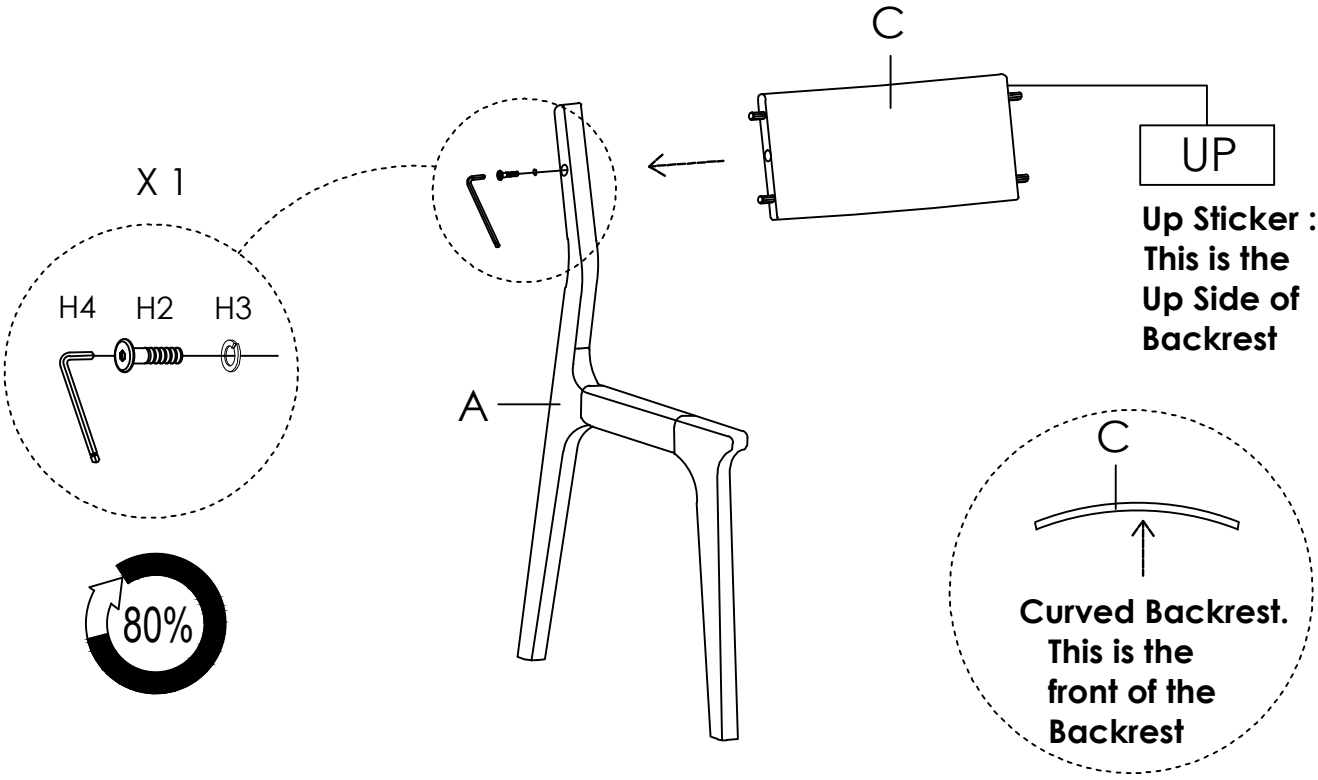


4 Insert the Front & Back Rails (D) to the Left Leg (A).

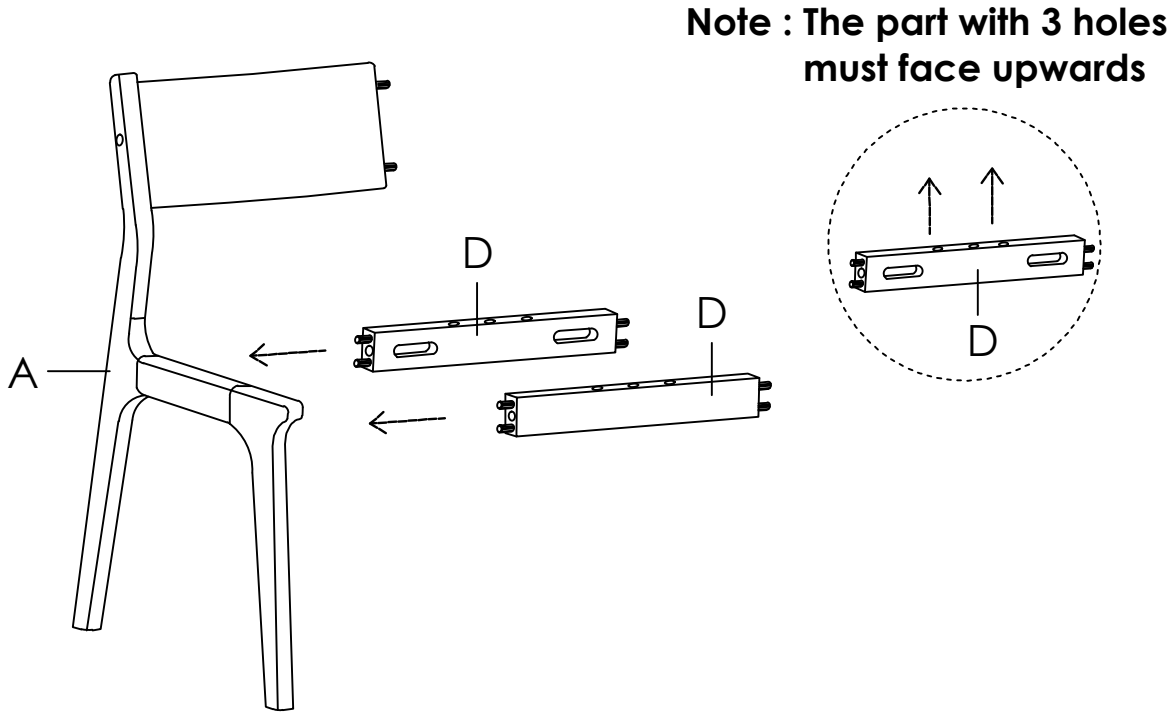


5 Insert the Center Rail (E) to the Left Leg (A).


Note : The part with the screw holes must face downwards

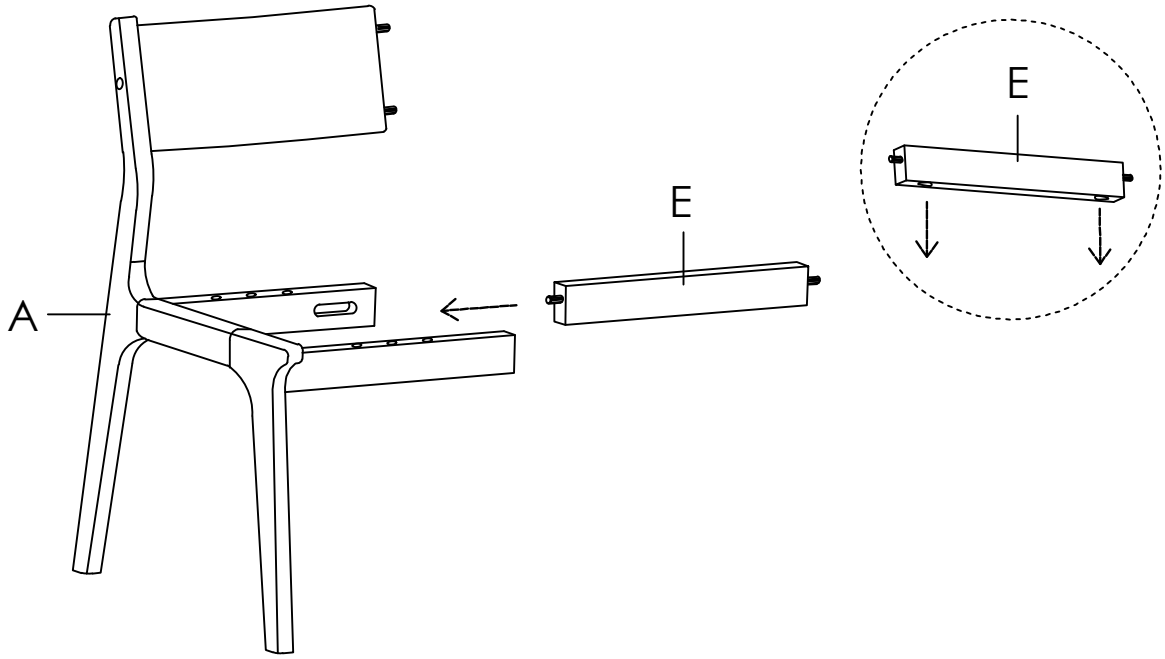


6 Attach the Front & Back Rails (D) to Left Leg (A), using Spring Washers (H3) , Long Bolts (H1) and Allen Wrench (H4). **Do not fully tighten yet.**

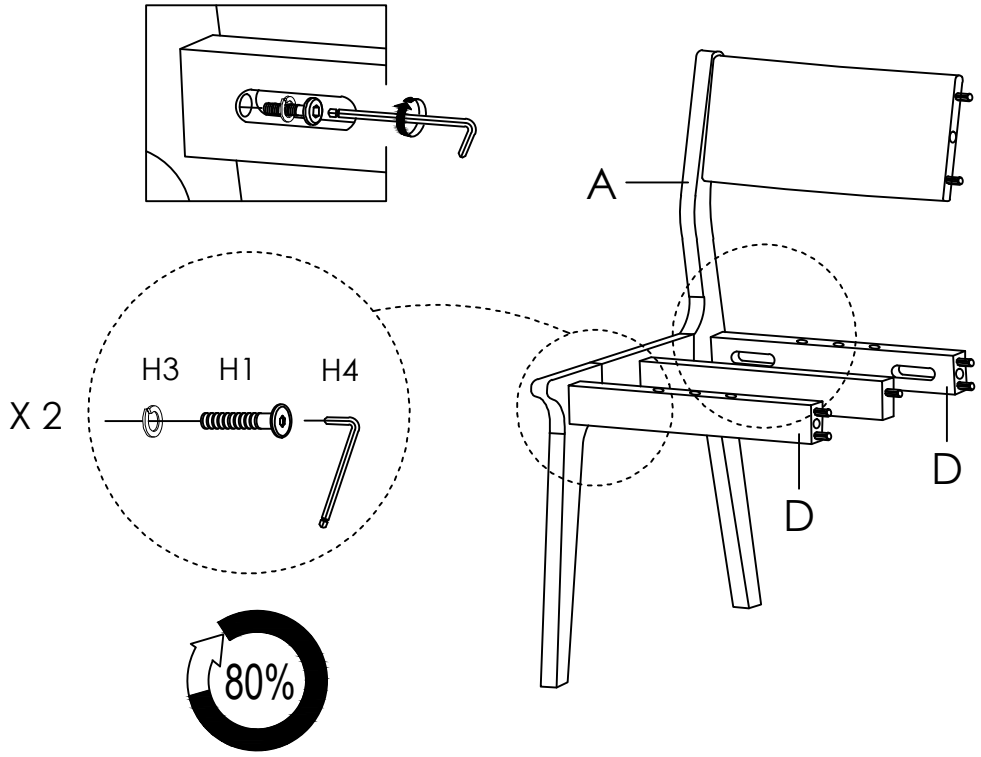


7 First insert the Right Leg (B) to the assembled frame in Step 6. Attach the Backrest (C) to the Right Leg (B),using Spring Washers (H3) , Short Bolts (H2) and Allen Wrench (H4). **Do not fully tighten yet.** Attach the Front & Back Rails (D) to the Right Leg (B), using Spring Washers (H3) , Long Bolts (H1) and Allen Wrench (H4). **Do not fully tighten yet.**

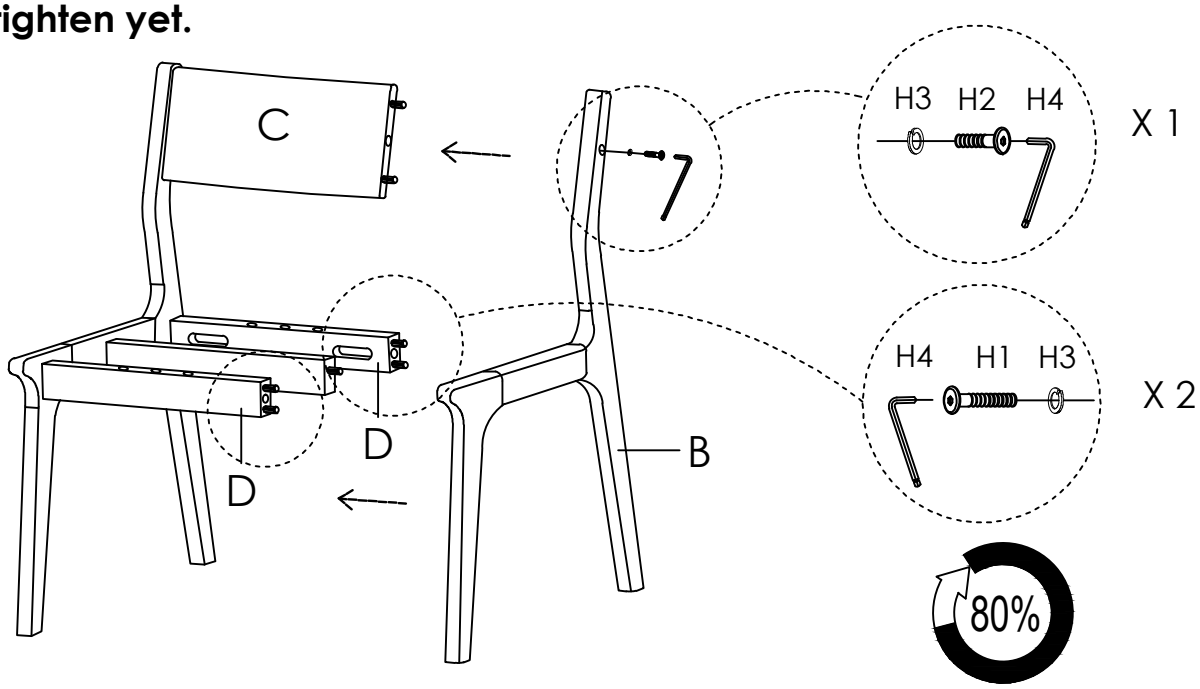

8 Place the chair frame assembled in Step 7 on a flat surface, press it diagonally, and after it is flattened by shaking it left and right, front and back. **Once level, tighten all bolts.**

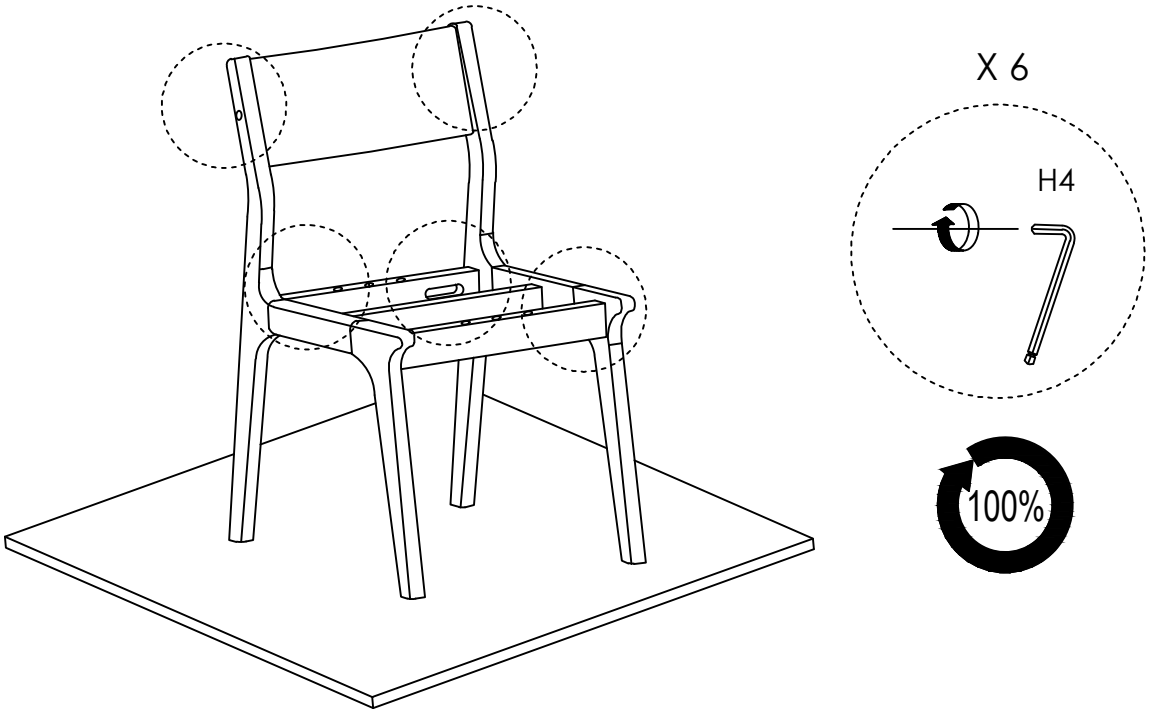


9 Insert the Wood Dowels (H5) to the Front & Back Rails (D). Then fit the Seat (F) on the frame.
Note : Please pay attention to the Front Sticker.

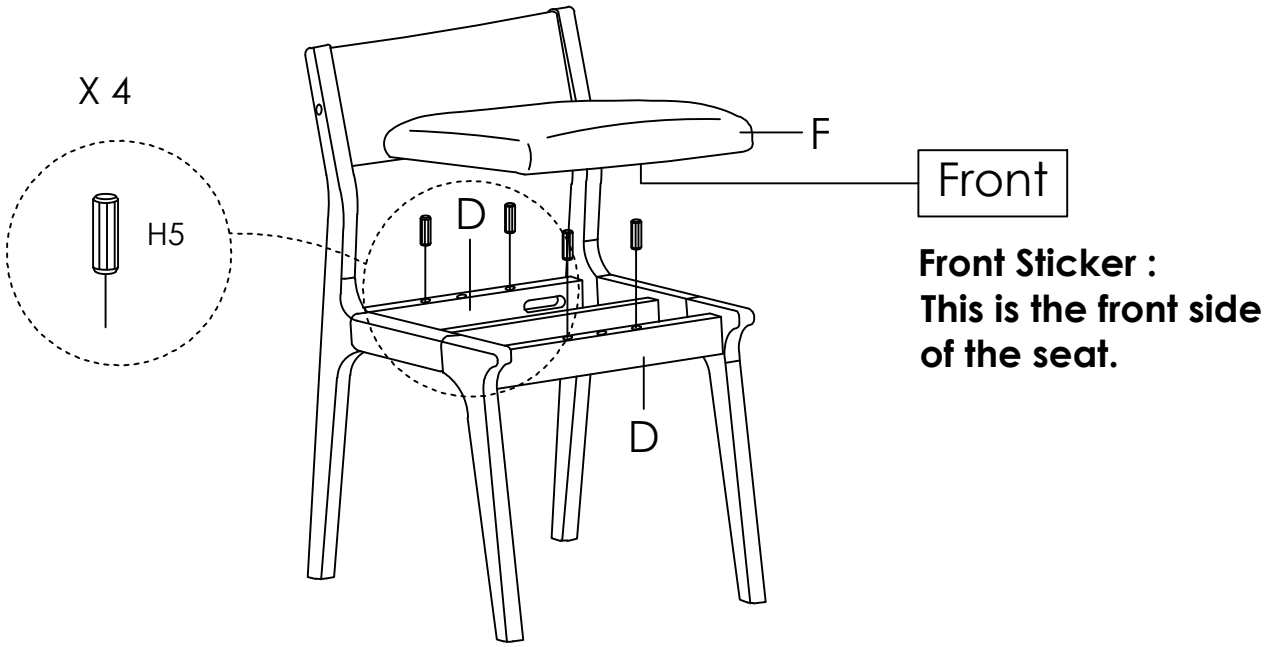


Front Sticker :
This is the front side of the seat.

10 Attach the Seat (F) to the Front & Back Rails (D), using Spring Washers (H3), Long Bolts (H1) and Allen Wrench (H4). **Fully tighten.**

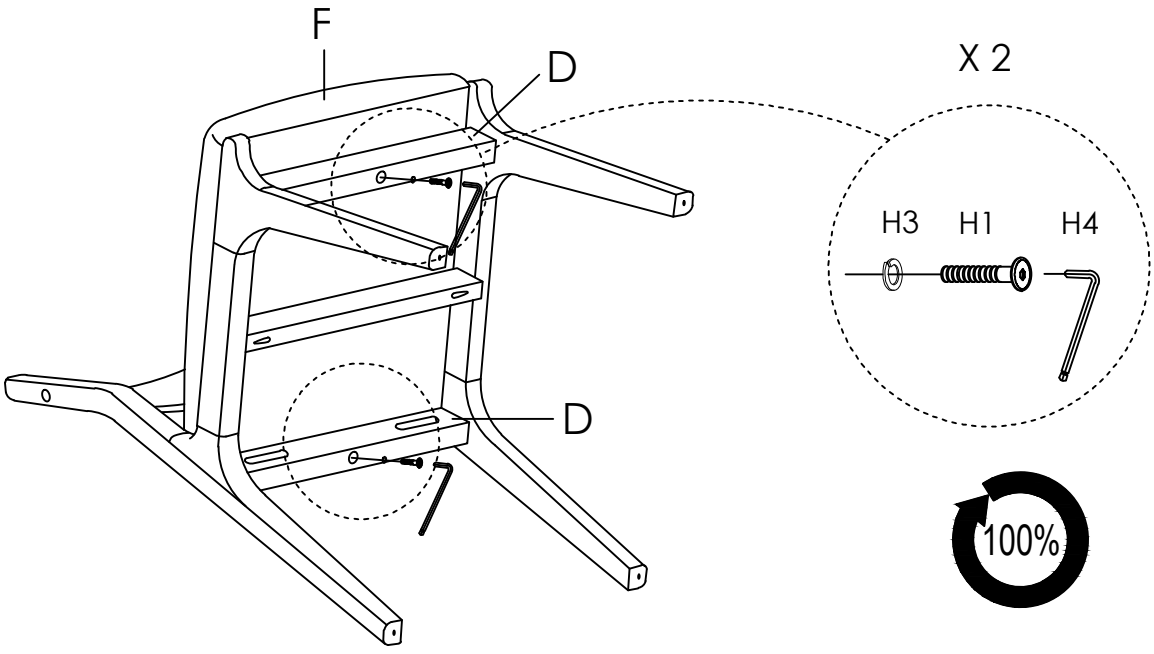


11 Attach the Center Rail (E) to the Left & Right Legs (A & B), using CSK Screw (H6). **Fully tighten.**

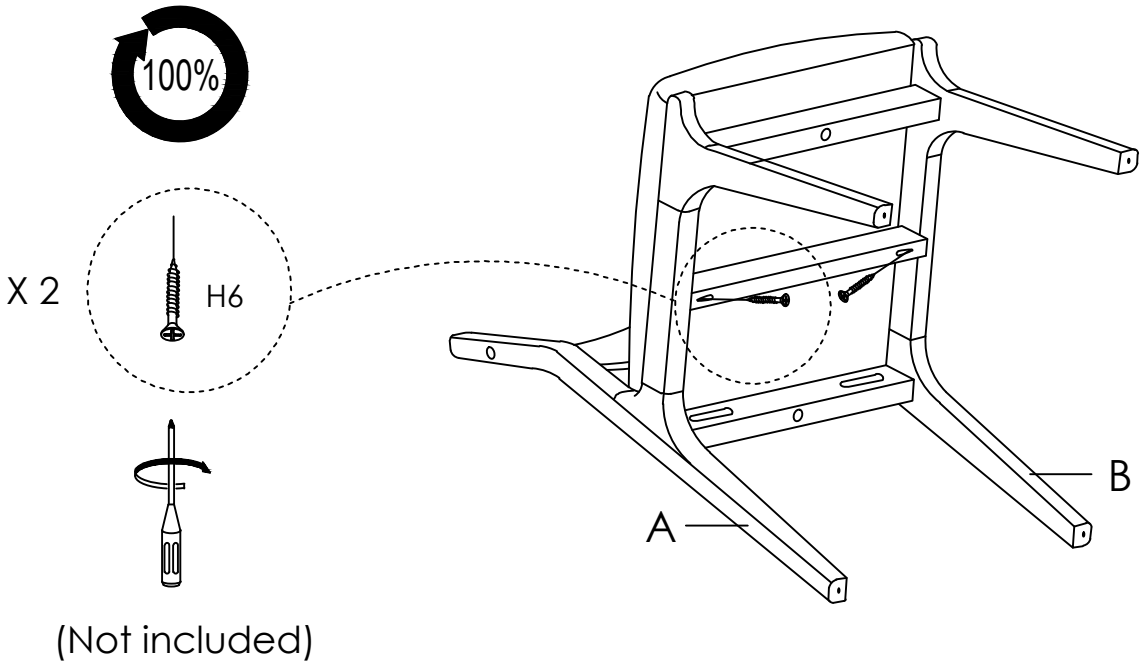

(Not included)

12 Tap the PVC Nail (H7) into the bottom of the Chair Legs.

(Not included)

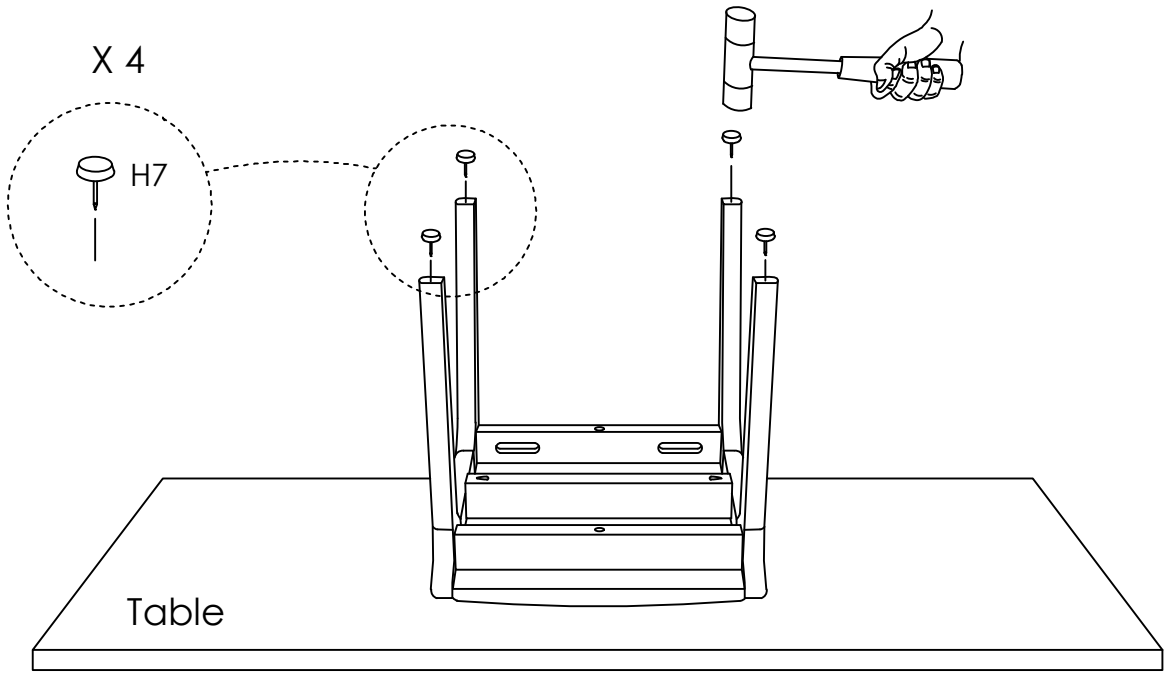

⓭ Gently tap the Wooden Plugs (H8) into the Left and Right Leg.
Assembly complete.

