
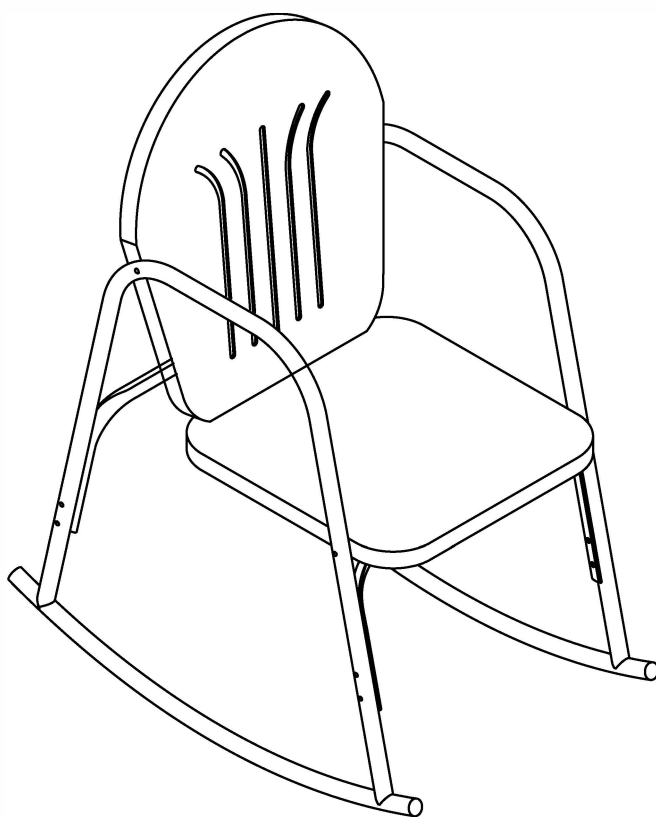








Rocking Chair



PART LIST

A 	B 	C 	D 
Chair Back 2 PCS	Chair Seat 2 PCS	Arm 4 PCS	Crossbar 4 PCS


HARDWARE LIST

#1  M6X42mm	#2  M6X40mm	#3  M6X13mm	#4 	#5 
Long Bolt 8 PCS (Extra 1)	Medium Bolt 16 PCS (Extra 1)	Short Bolt 8 PCS (Extra 1)	Hex Nut 32 PCS (Extra 2)	Flat Washer 40 PCS (Extra 4)
#6 	#7 	#8 	#9 	
Wrench 1 PC	Allen Wrench 1 PC	Plastic Washer 8 PCS (Extra 1)	Round Plastic Washer 24 PCS (Extra 2)	

NOTE: We recommend at least two people work together to assemble unit.


Step 1. Lay chair seat (part B) down on a soft flat surface, such as carpet, as shown below. Attach chair back (part A) to chair seat (part B) using short bolts (part #3), hex nuts (part #4), flat washers (part #5), wrench (part #6) and allen wrench (part #7).

NOTE: Please do not fully tighten bolts until unit is fully assembled.

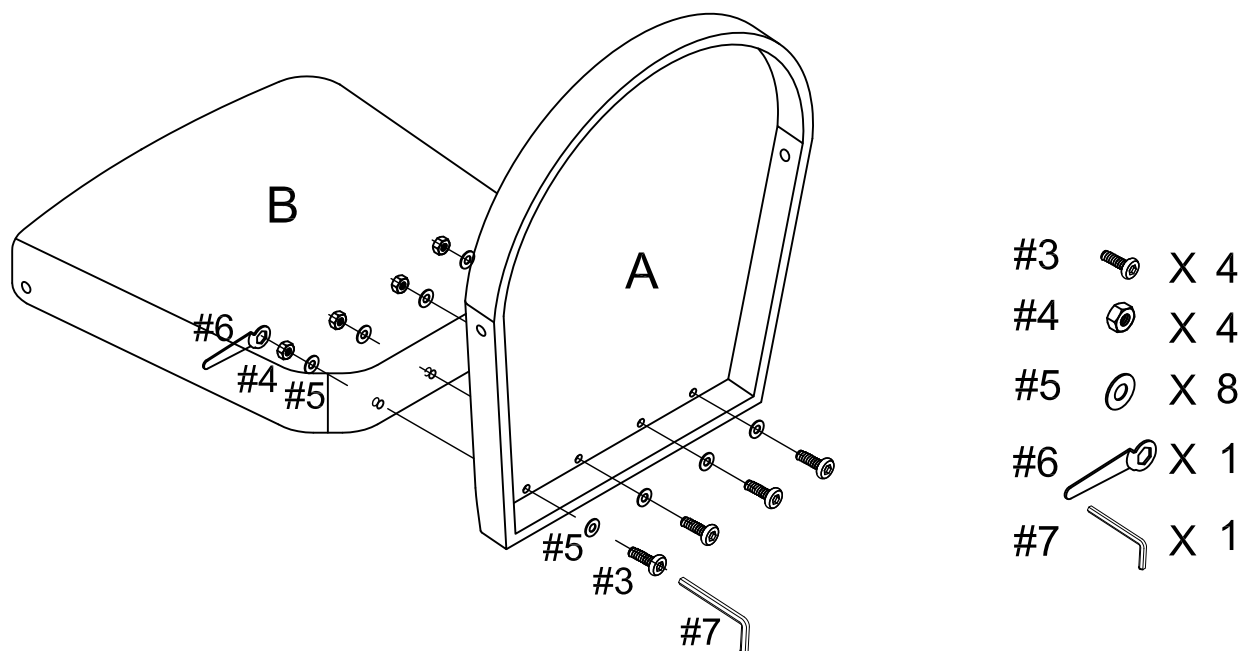


Step 2. Attach arms (parts C) to assembled unit (parts A & B) using long bolts (part #1), round plastic washers (part #9), hex nuts (part #4), flat washers (part #5), plastic washers (part #8), wrench (part #6) and allen wrench (part #7).

NOTE: Please do not fully tighten bolts until unit is fully assembled.

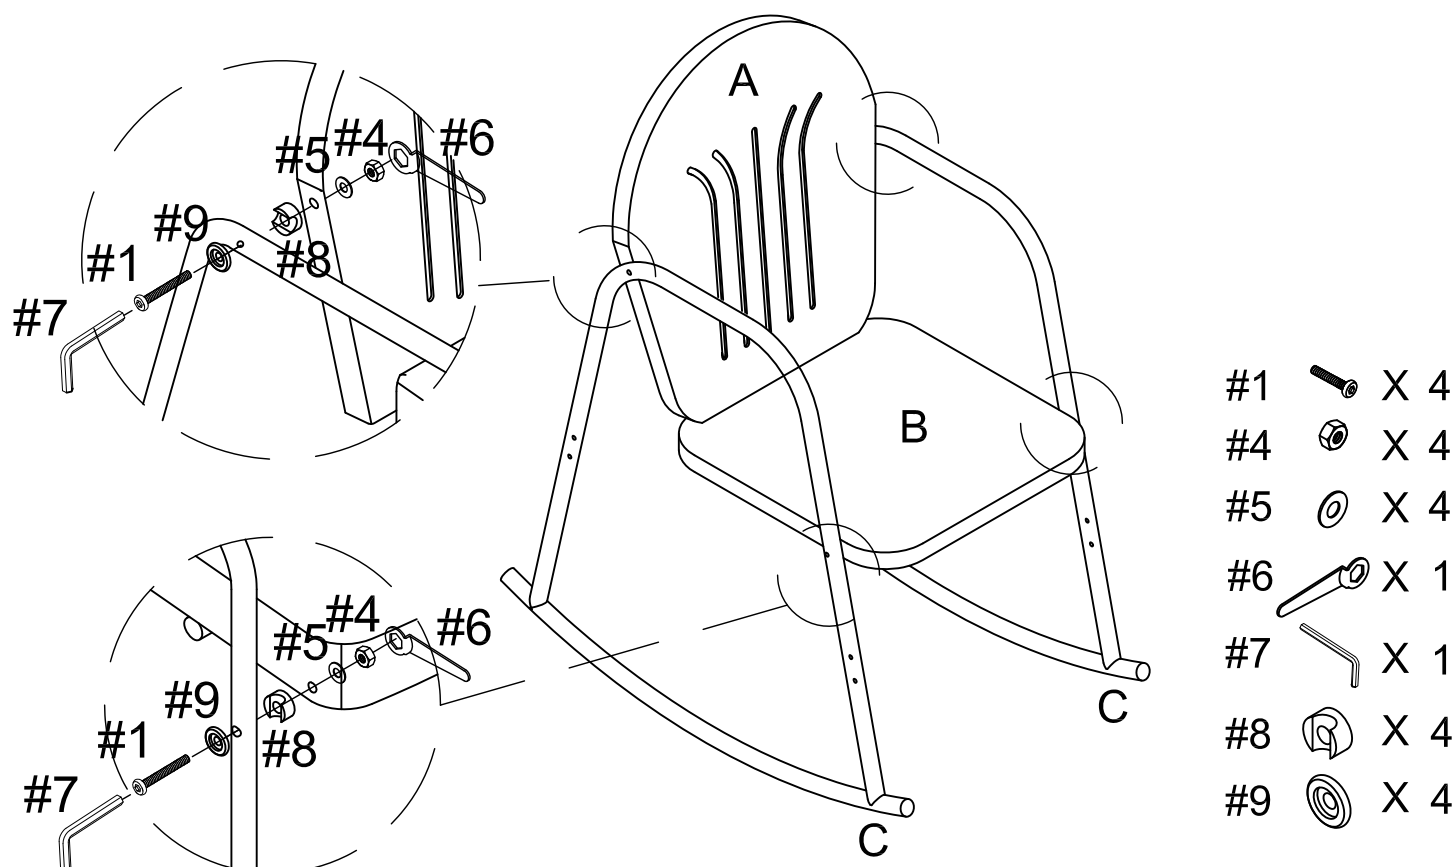

Step 3. Attach crossbars (part D) to arms (part C) using medium bolts (part #2), round plastic washers (part #9), hex nuts (part #4), flat washers (part #5), wrench (part #6) and allen wrench (part #7).

NOTE: Please fully tighten all bolts at this time.

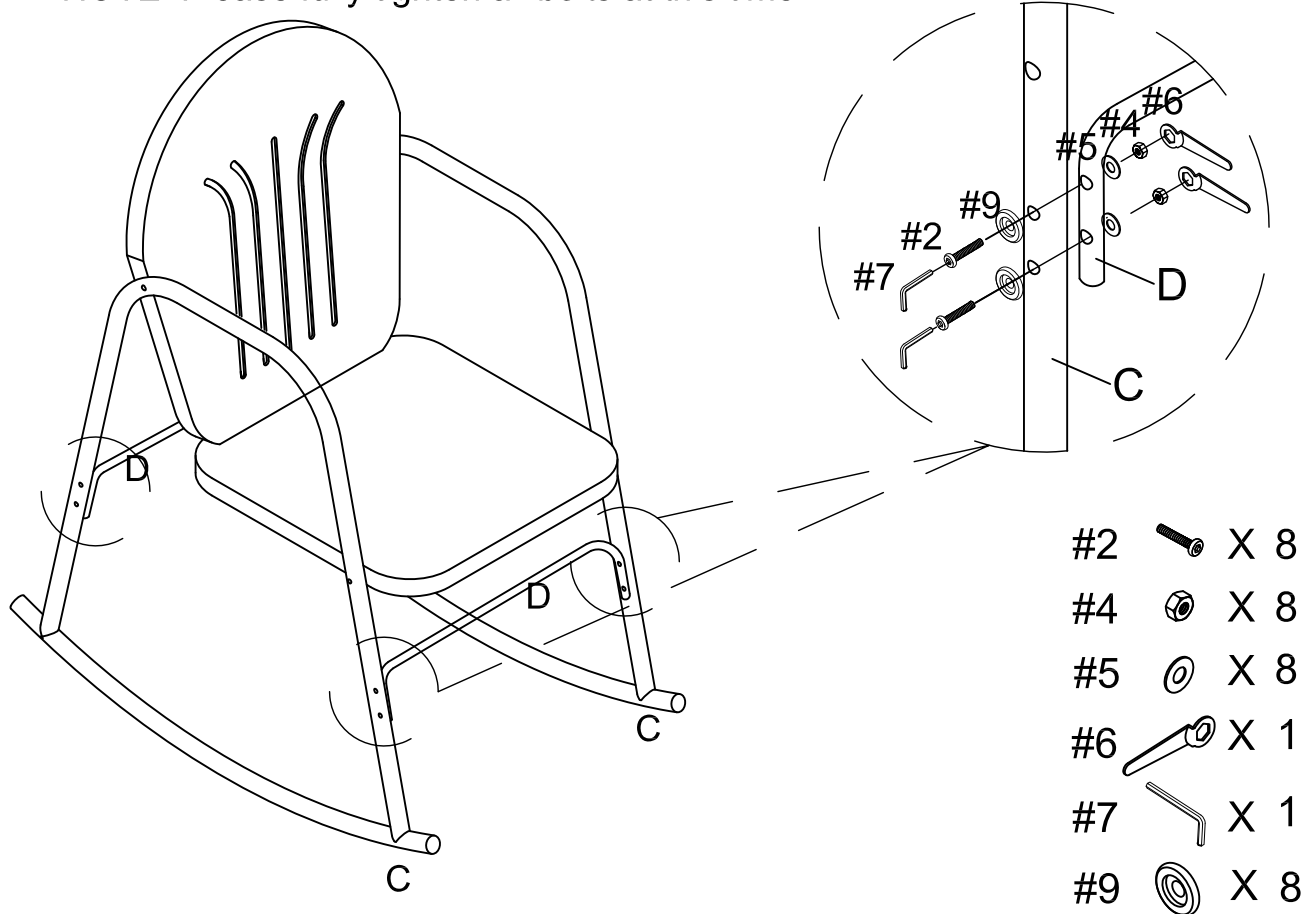

Step 4. Repeat steps 1-3 to assemble remaining chair.