

Pneumatic Mixer Series, AS-50 gallons

This product is suitable for mixing, dilution, dissolution, reaction, emulsification, dispersion, turbidity, sedimentation prevention, etc. of liquid-liquid and solid-liquid.

It is especially suitable for mixing the paint of mixed air spraying; It applies to the chemical industry, petrochemical industry, coating, daily chemical industry, ceramics, mining, water treatment, food beverage, medicine, paper making, electronics, textile, construction, automobile, and furniture industries.

The safe explosion-proof device will never produce electric sparks after using it for a long time, which can fully meet the requirements of safety regulations. It can be used in flammable, explosive, high-temperature, humid, and other special environments.

It is equipped with a quick coupling, which is easy to use. Stepless speed regulation. (speed adjustment according to material viscosity)

Clamp Mixer (50 gallons)

■ Power: 1/2HP (High Power)

gallon Square or Round Drum

15x900mm


120cm

■ Capacity: 50

■ Axis Size:


■ Impeller: 6inch

■ Total Height:

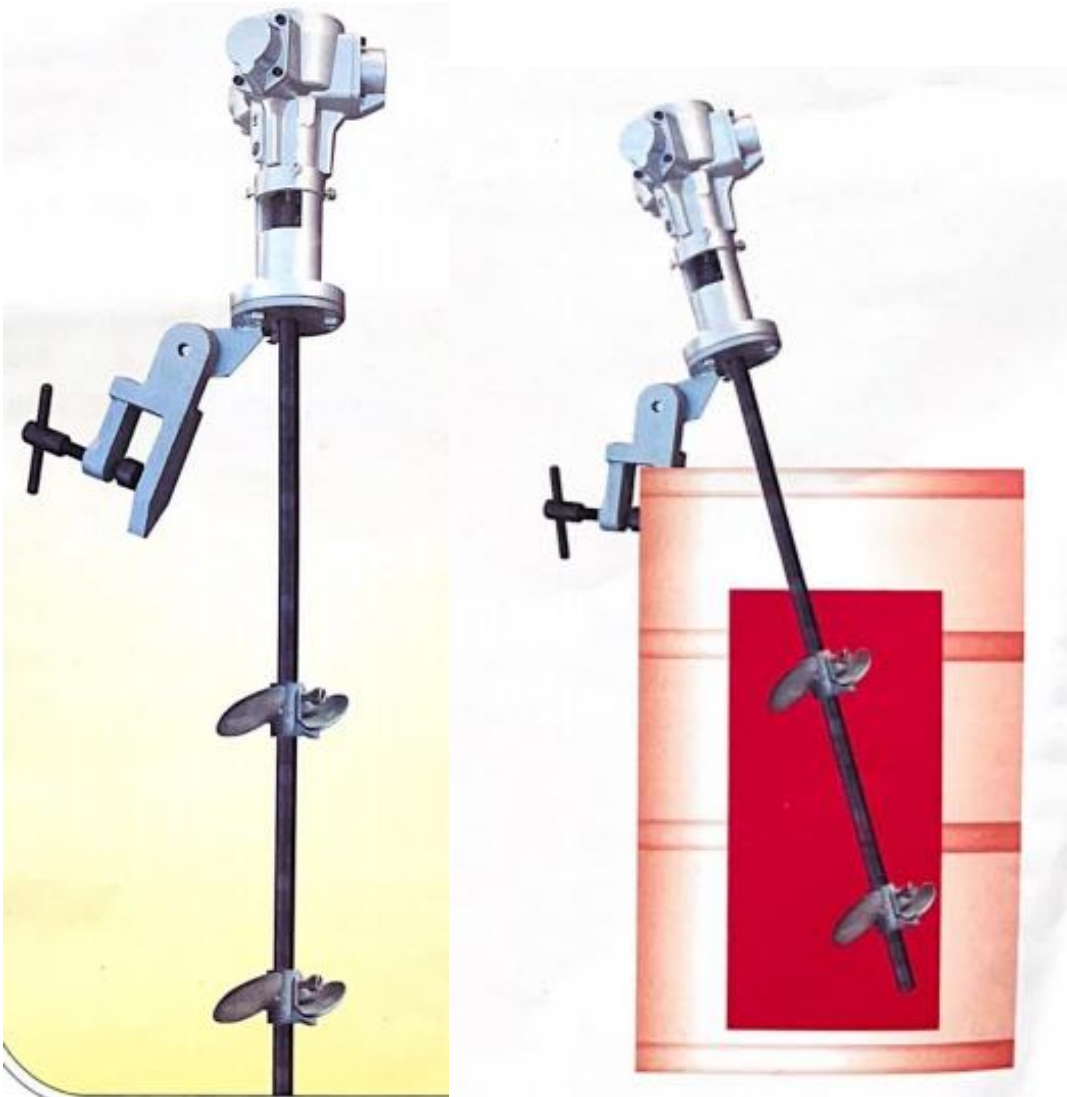

Pneumatic Mixer Series, AS-50 gallons

Exploded View of 50 Gallon Clip on Air Mixer

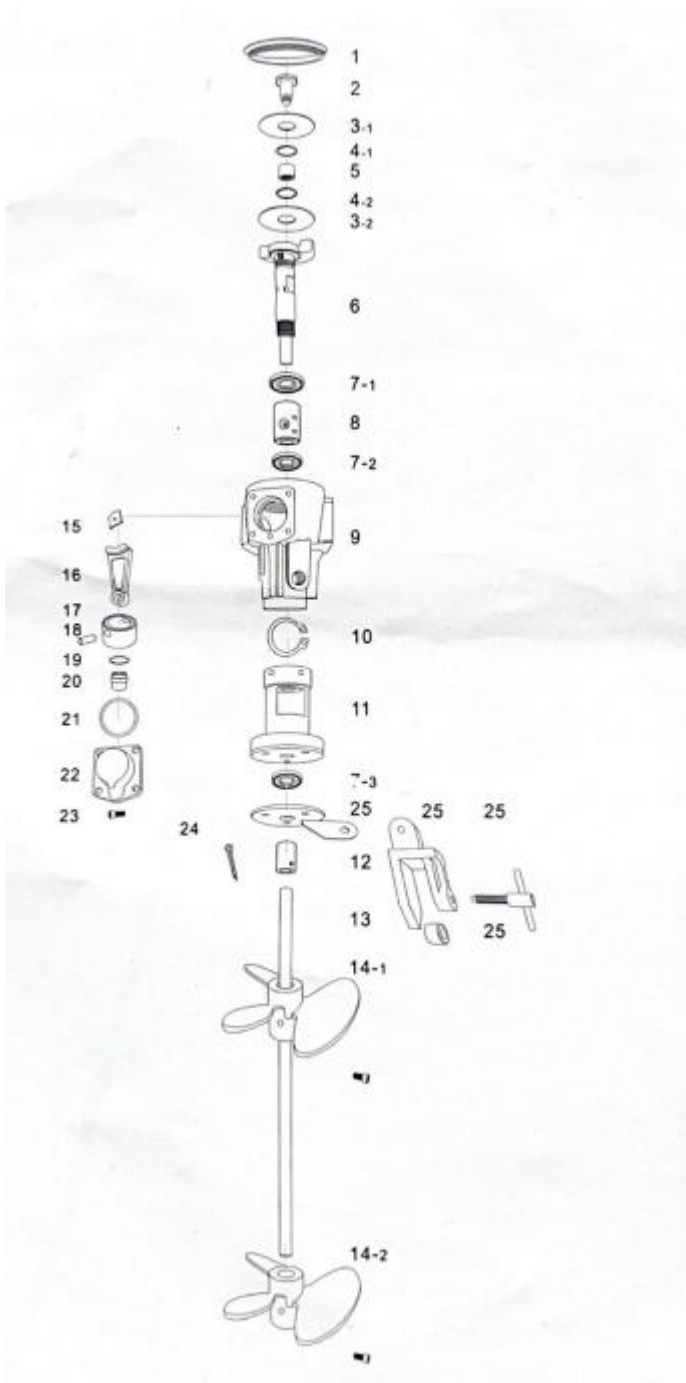

Pneumatic Mixer Accessories Name

- AS-1. Machine Cover
- AS-2. Earing Column
- AS-3. Flat Gasket
- AS-4. Gasket
- AS-5. Roller Pin
- AS-6. Eccentric Core Wheel
- AS-7. Shaft Sleeve
- AS-8. Guide Sleeve
- AS-9. Machine Body
- AS-10. Circlip

- AS-1]. Connecting Machine Sleeve
- AS-12. Coupling Sleeve
- AS-13. Mixing Rod
- AS-14. Impeller
- AS-15. Rubber Pad
- AS-16. Connecting Rod
- AS-17. Piston
- AS-18. Piston Pin
- AS-19. Rubber Ring
- AS-20. Piston Sleeve
- AS-21. Rubber Ring
- AS-22. Side Cover
- AS-23. Screw
- AS-24. Latch
- AS-25. Mixing Clamp Group