

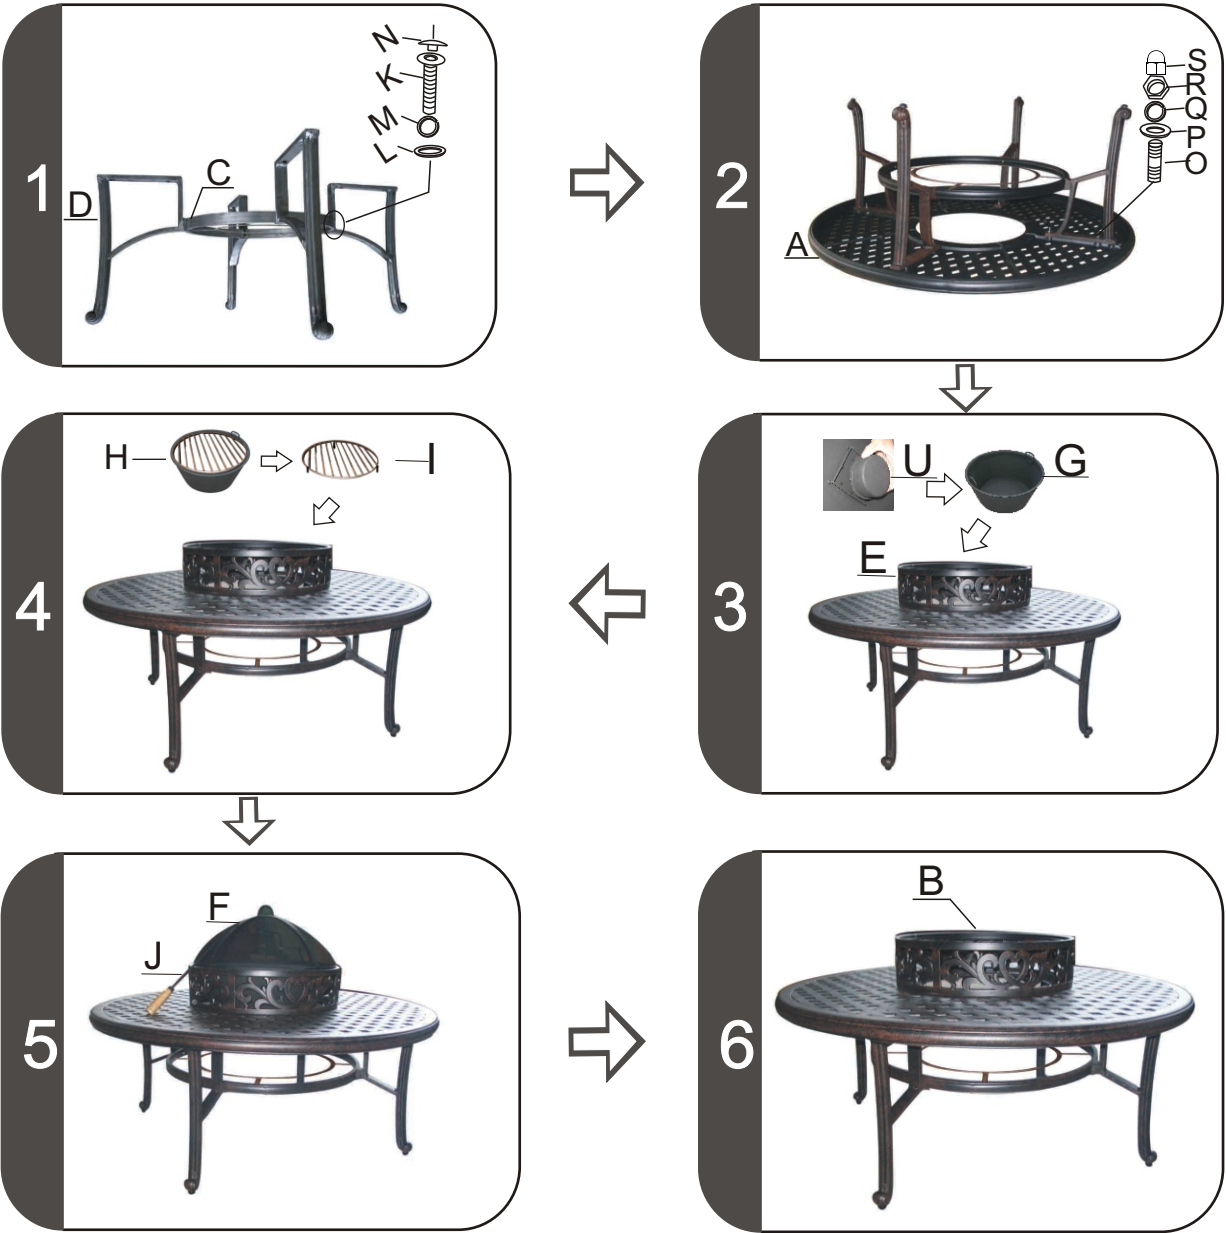
ASSEMBLY INSTRUCTIONS

ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly step:

- 1.Loosely attach the center plate(C) to the legs(D) using small flat washers(L), small lock washers(M), bolts(K) and PVC covers(N). DO NOT tighten the bolts.
 - 2.Turn the table top(A) upside down on the soft clean surface. Loosely attach the legs(D) to the table top using bolts(O),big flat washers(P), lock washers(Q) nuts(R)and nut caps(S).
 - 3.Please attach the the steel fire pit(G)and the drip pan(U)to the upon ring(E) as this figure 3.
 - 4.Then, you can put grate(H),grill rack(I) into the steel fire pit(G) one by one.
 - 5.When you keep the fire pit free, you can put the center tray(B) on the upon ring stead as the spark screen.
- Warning : DO NOT use acid or alkaline washing liquid to clean the product.



Parts	Pictures	Description	Qty
A		Table top	1
B		Center tray	1
C		Center plate	1
D		Table leg	4
E		Upon ring	1
F		Spark screen	1
G		Steel fire pit	1
U		Drip pan	1
H		Grate	1
I		Grill rack	1
J		Fork	1
V		Foot leveler	4
W		Umbrella cover	1
K		Bolt	4
L		Small flat washer	4
M		Small lock washer	4
N		PVC cover	4
O		Bolt	8
P		Big flat washer	8
Q		Big lock washer	8
R		Nut	8
S		Nut cap	8
T		Wrench	1
U		Wrench	1

* DO NOT OVER TIGHTEN




* NO SOCKET DRIVERS



* NO POWER TOOLS



ASSEMBLY INSTRUCTIONS

Parts List				
Pieces	Schema		Description	QTY
A			Screw	4
B			Flat washer	4
C			Lock washer	4
D			Nut	4
E			Alu plate	4
F			Nut cap	4
G			Wrench	1
H			PE cap	Factory already assembled
I			Seat	1
J	1		Base	1
	2		Alu plate	2
	3		Spring plate	2
	4		Screw	4
	5		Flat washer	4
	6		Lock washer	4
	7		Nut	4
	8		TR	1
K			Seat Cushion	1

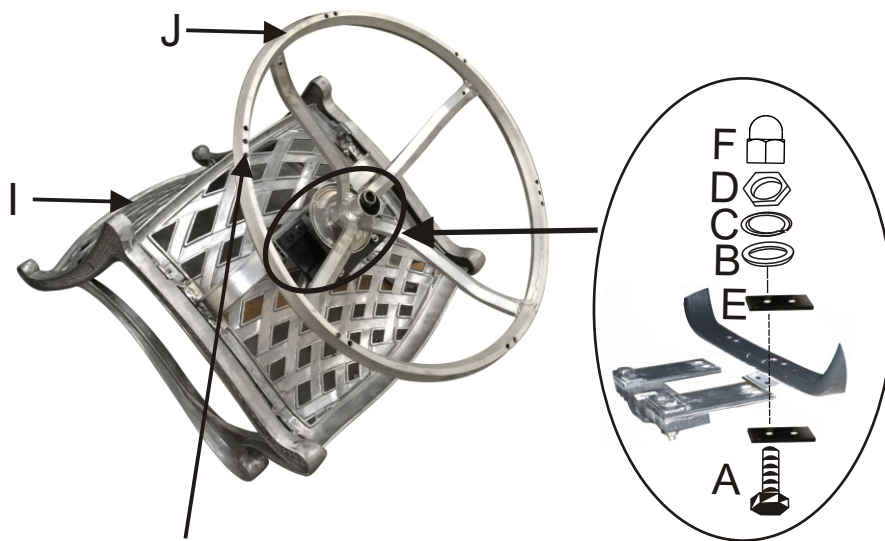


WARNING!

- This chair has a 250 lbs weight capacity.
- Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.



H : This part have been assembled by factory already.

1. Before removing all protective packing material and position base on floor. Attach the seat(I) onto the base (J)with Alu plate as the picture, then assemble using bolt(A), flat washers(B), lock washers(C), nuts(D) and nut cap(F). Be sure to the arrows face to front.
2. Tighten all the bolts and nuts. Test the swivel rocker gently. If the rocker does not rock properly, double check the assembly procedure.
3. Remove all protective packaging.
4. Put Cushion(K) on the unit(as shown in the picture).

Warning : DO NOT use acid or alkaline washing liquid to clean the product.



*** DO NOT OVER TIGHTEN**

*** NO SOCKET DRIVERS**



*** NO POWER TOOLS**

