



The wiring method of the controller

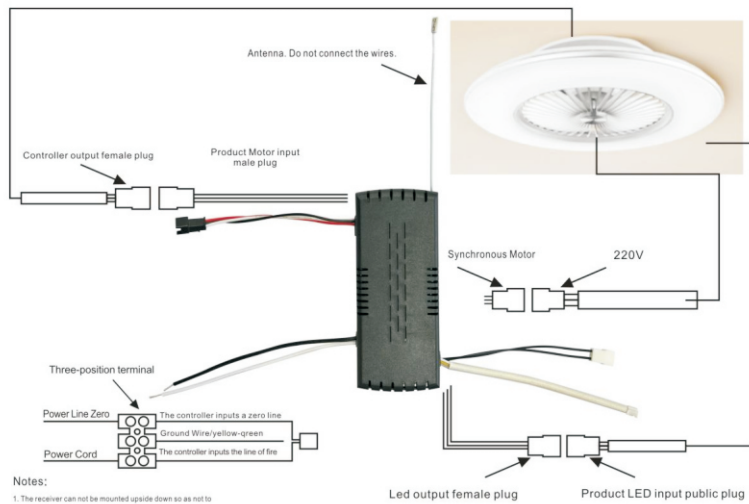

Notes:

1. The receiver can not be mounted upside down so as not to affect the cover and ceiling.
2. The receiver is divided into input and output. It is forbidden to switch the input and output.
3. Working Voltage of this product AC: 180V-255V
4. If there is a wall switch on the fan, it must be on in order to control effectively.
5. please connect the wires according to the color of the wires and the instructions on the bushing.
6. When using the remote control, please check whether the battery (note the positive and negative pole of the battery), the handle control key, the indicator light will flash when you press each key.

DC converter (bedroom) fan and other remote control instructions TMALL (2.4G) dimming and color mixing fan controller

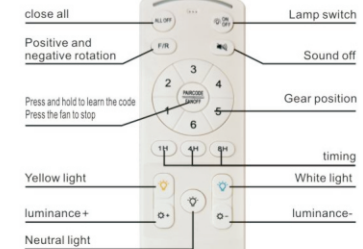

Battery type

7#1.5V*2

1 Turn on the power switch, hear the "Beep" within 3 seconds after a long press "PAIR CODE" key, the receiver issued "Beep" one sound, on the code success. If the code matching is not successful, turn off the power and wait one minute to repeat the operation.

Warning Sign

Remote control can not be effectively controlled please check the battery long-term non-use please remove the battery.