


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.
4. Min. 90°C supply conductors. consult a qualified electrician to ensure correct branch circuit conductor.

3-LIGHT FLUSH MOUNT

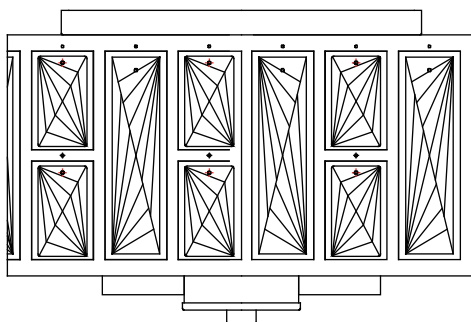

TOOLS REQUIRED

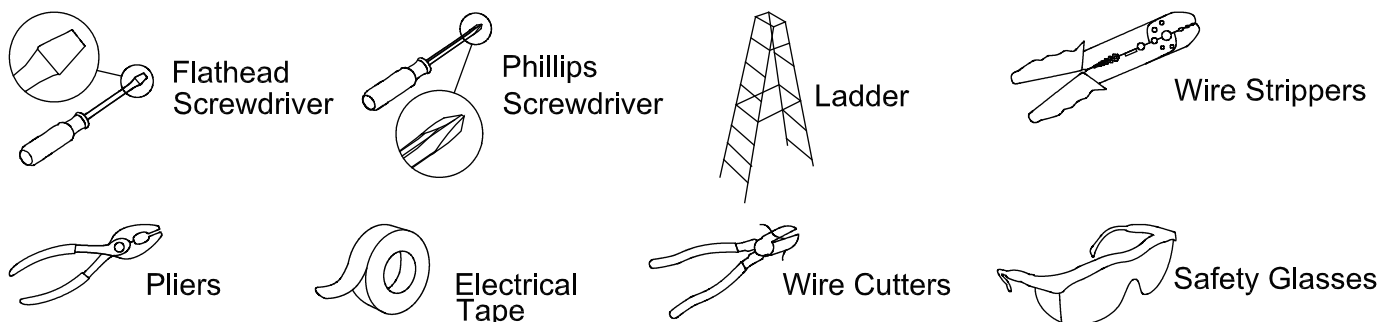

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY	PIECE	DESCRIPTION	QUANTITY
A	Mounting bracket	1	F	Frame	1
B	Green ground screw	1	G	Fixture body	1
C	Outlet box screw	2	H	Central tube	1
D	Wire nut	3	I	Crystal A	20
E	Lock nut	2	J	Crystal B	10

INSTALLATION

1. Attach the central tube(H) through the wire and lock one end on the fixture body(G) and the other end on the canopy(F1).
2. Attach the mounting bracket (A) to the junction box with outlet box screw (C) then fix it.
3. Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire, black to (black) and white to (white).
4. Attach the canopy (F1) to the mounting bracket (A) with the lock nut (E).
5. Hang the crystal A(I) B(J) on the frame (F) respectively.
6. Install the 60W MAX type B10 bulbs (not included) into each socket.

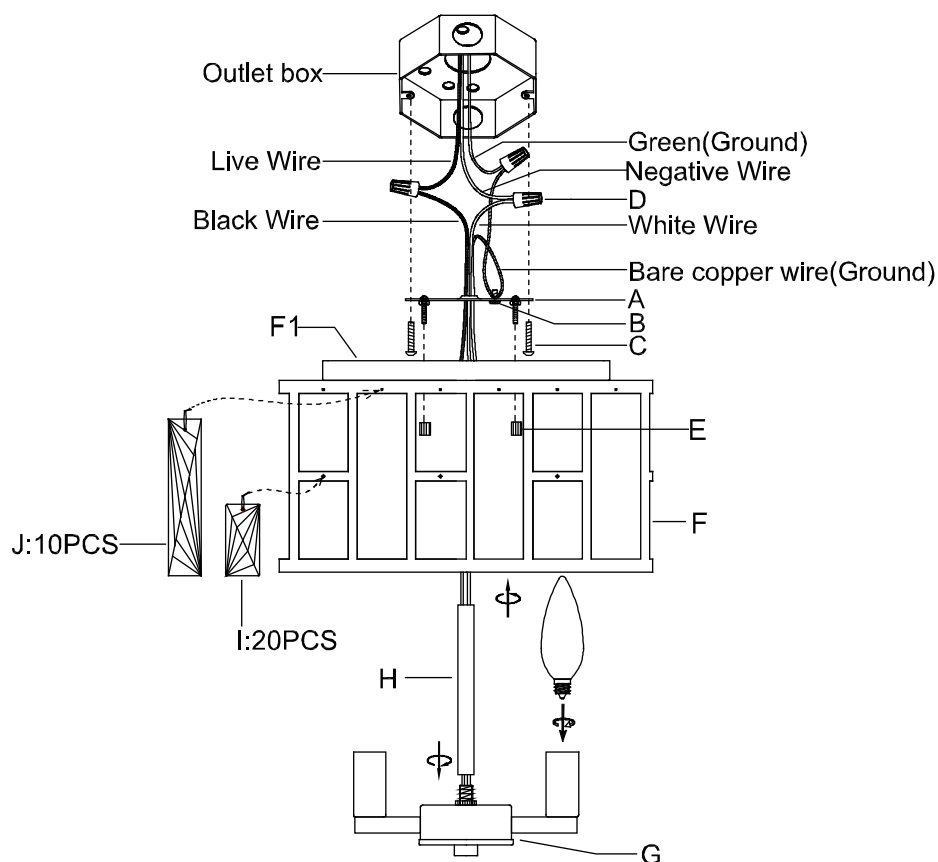

If you have any questions, please contact us, our warmest customer service will assist you within 24 hours.