

#### Features

- Single-function handshower with flow control.
- Button activated flow rate of 1.5 gal/min (5.7 l/min) to 2.0 gal/min (7.6 l/min).
- Easy to clean MasterClean™ spray nozzles.
- Air-induction technology maximizes the air/water mix for a powerful, even flow.
- 3-9/16" (90 mm) diameter sprayface.
- Includes check valve for backflow prevention.
- G1/2"-14 inlet connection.
- Earns Water Efficiency points in the LEED Green Building Rating System™ for 1.75 gal/min (6.6 l/min).

#### Required Accessories

K-8593

or


K-9514

or

K-45981 Shower Hose

or

K-45982 Shower Hose

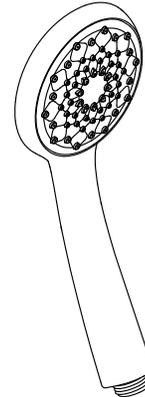

For complete listing of available colors, go to [kohler.com](http://kohler.com).



#### Codes/Standards

ASME A112.18.1/CSA B125.1


EPA WaterSense®

#### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### Product Specification

The single-function handshower shall feature flow control and button activated flow rate of 1.5 gal/min (5.7 l/min) to 2.0 gal/min (7.6 l/min). Handshower shall feature easy to clean MasterClean spray nozzles. Handshower shall feature air-induction technology to maximize the air/water mix for a powerful, even flow. Handshower shall have 3-9/16" (90 mm) diameter sprayface and G1/2"-14 inlet connection. Handshower shall include check valve for backflow prevention. Handshower shall assist in earning Water Efficiency points in the LEED Green Building Rating System™ for 1.75 gal/min (6.6 l/min) flow rate. Single-function handshower shall be Kohler Model K-99248-\_\_\_\_\_.

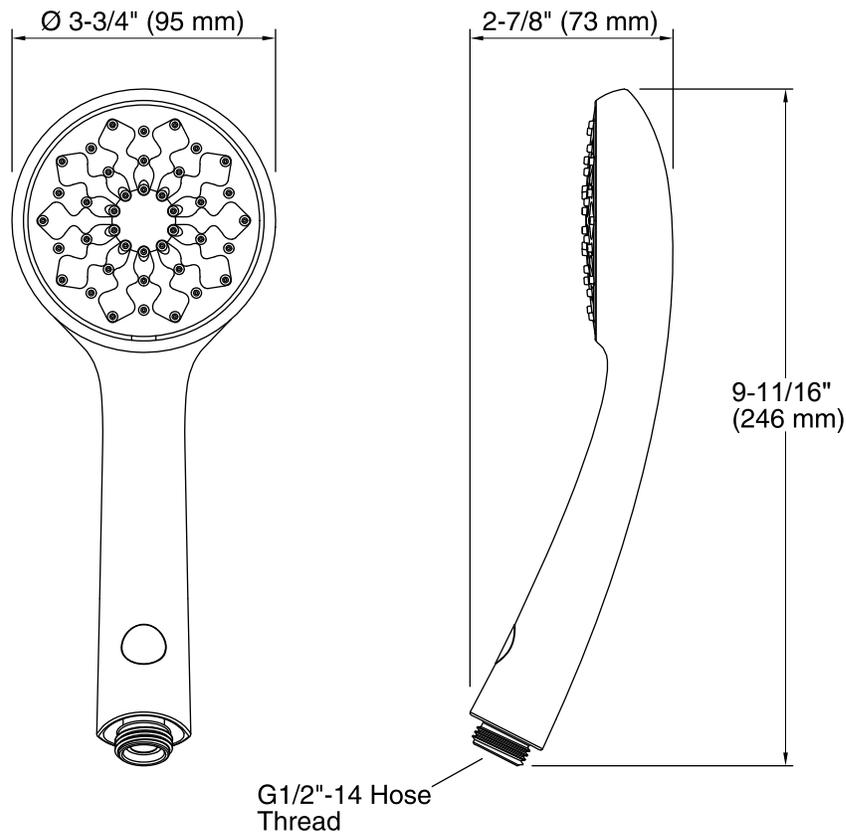

#### Technical Information

All measurements are nominal.

Pressure: 45 psi (3.1 bar)

#### Handshower:

Flow rate: 2 gal/min (7.6 l/min)

#### Installation Notes

Install this product according to the installation guide.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

**NOTICE:** Choose an automatic compensating valve with the appropriate minimum flow rating to ensure your valve will provide safety at the lowest flow rates. For a handshower rated at 1.5 gal/min (5.7 l/min) maximum, use with an automatic compensating valve rated at 1.2 gal/min (4.5 l/min) or less.