
INSTALLATION INSTRUCTION

PEDESTAL SINK



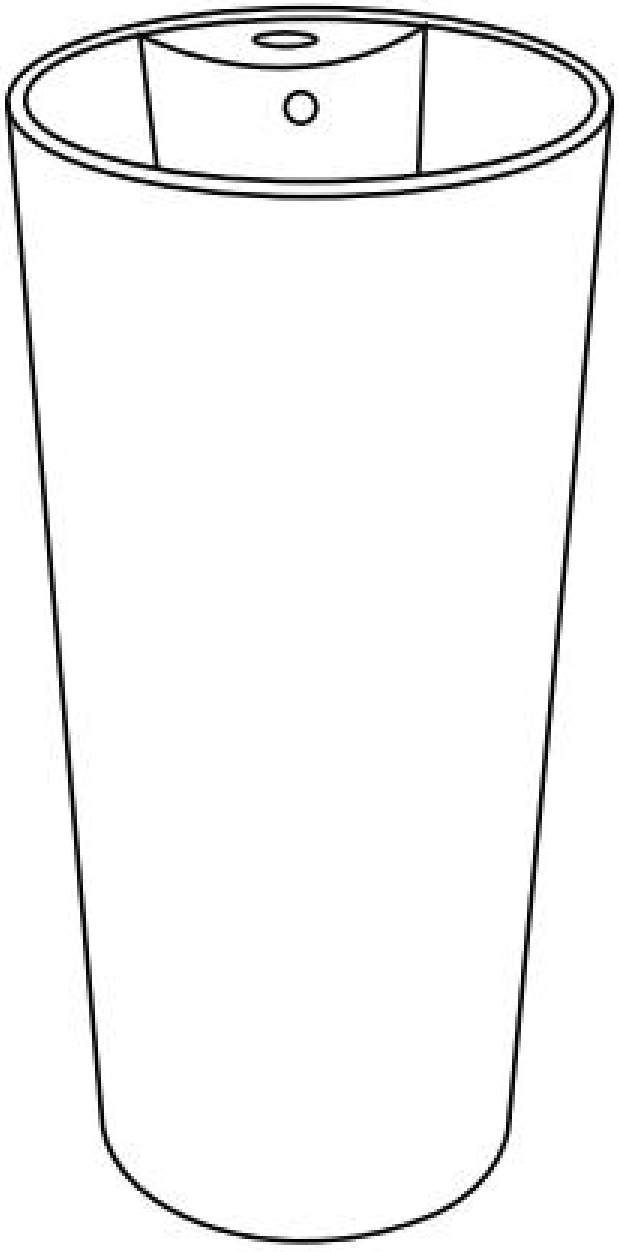

PRIOR TO INSTALLATION

1. Inspect sink thoroughly for shipping- induced scratches, chips or cracks before installation.

2. Comply fully with all local plumbing and building regulatory codes for your region.


All marked dimensions are nominal; always physically measure the sink before cutting or modifying walls or plumbing.

3. These step- by- step guidelines serve as general reference only. Manufacturer shall not take responsibility for installation discrepancies. Professional licensed plumber installation is strongly recommended.


4. Read all installation and maintenance instructions completely ahead of work. Wear safety goggles and work gloves, and utilize suitable hand tools for personal protection.

5. This ceramic fixture is heavy and fragile; two adults are required to move, lift and position the pedestal sink. Confirm wall surface is flat, plumb and level prior to beginning installation work.


SUGGESTED TOOLS & MATERIALS:

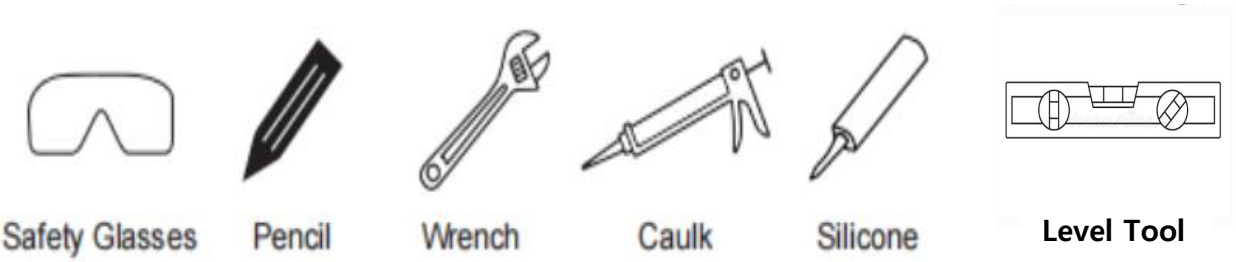

PRODUCT SIZE

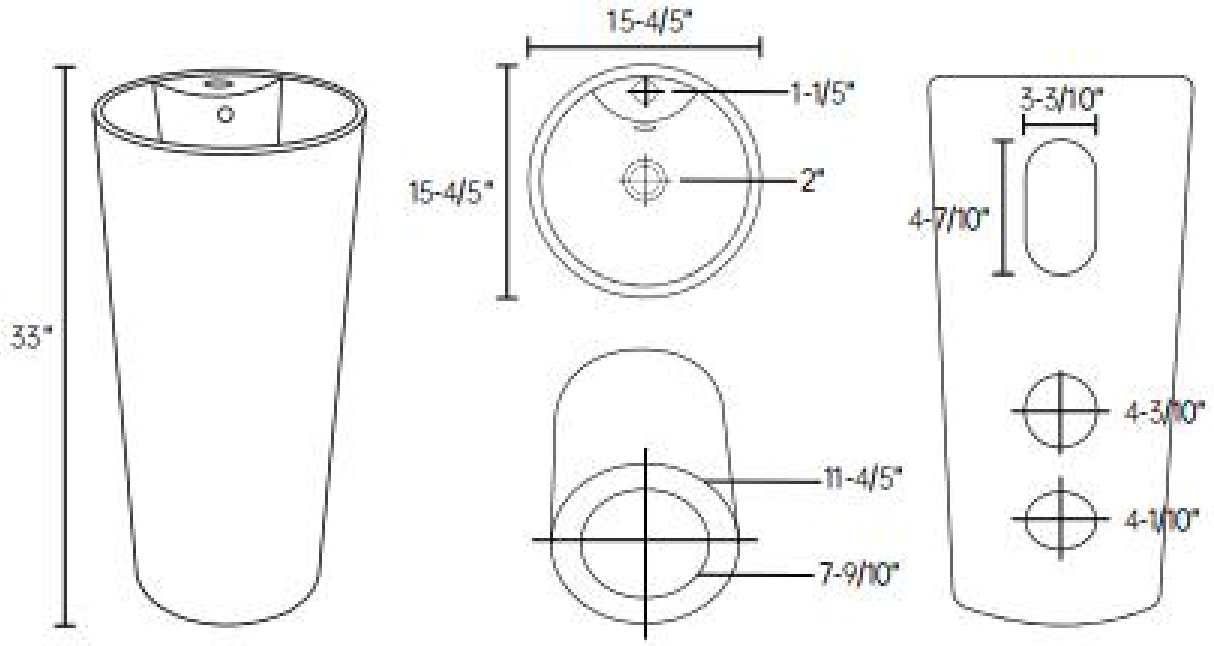

1. Read the complete instruction manual before beginning installation.
2. Confirm that your model will fit in intended location and plumbing fixtures are located where legally required before beginning installation.
3. Not all drawings on this manual are drawn to scale. Please refer to the model chart.
4. Two people are recommended to install and move this product.

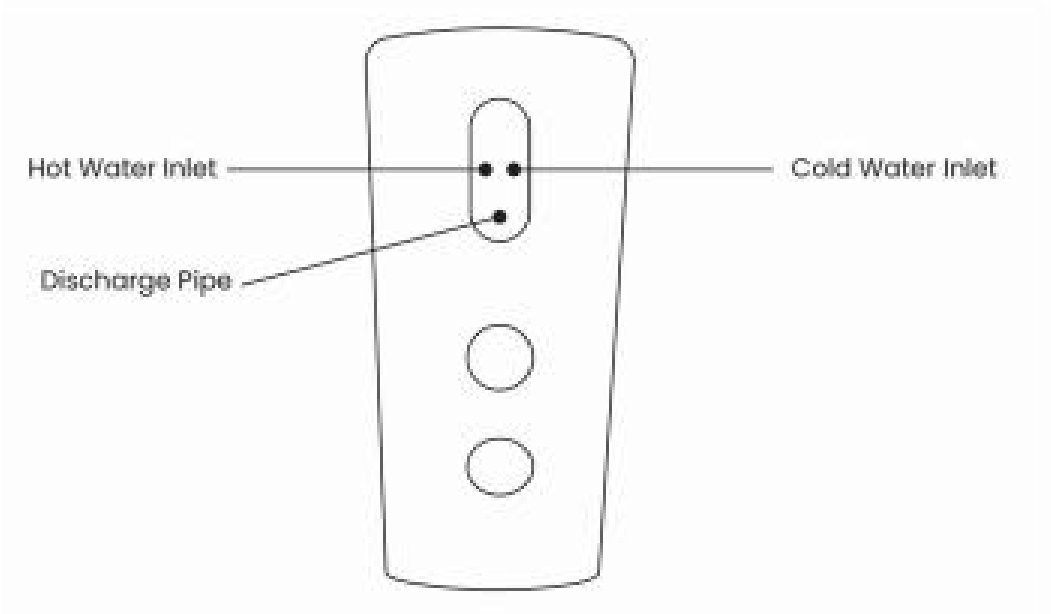

INSTALLATION INSTRUCTION

1. Verify Sink Location

Using a pencil mark the location where you want the sink to be onto the floor.




2.Pre-Assemble Drainage Components

Fit waste & overflow assembly onto sink basin before setting the pedestal in final spot.


Thread plumbing connections to basin. Faucet, drain assembly and supply lines are NOT included in package.

The 1- 1/2- inch discharge pipe position varies per fixture; re- route in- wall plumbing if required before positioning sink.

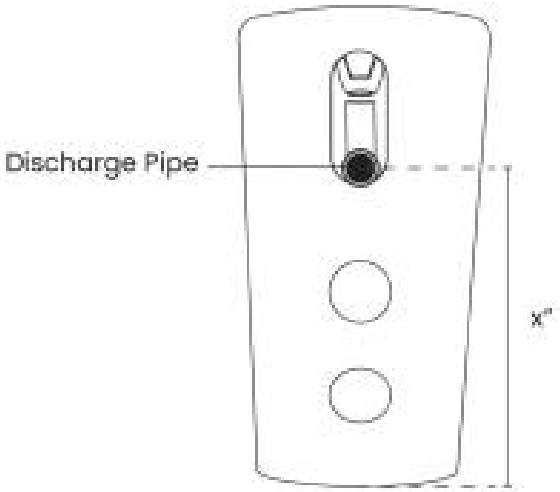

3. Connecting Plumbing

- We recommend installing faucet (not included) while back of sink is accessible.
- Align pipes in basin to plumbing in wall.
- Tighten into place, with clockwise motion.
- Water shutoff valve should be slightly above the 1 ½" drain line coming out of the wall.

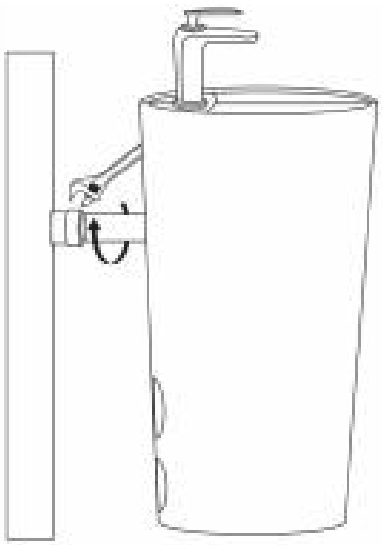


4. Final Position & Sealing (Two- Person Operation Mandatory)

Perform dry- fit test without adhesive first to confirm perfect fit.

Person one tilts sink slightly backward to lift basin marginally off floor surface. Person two applies construction adhesive evenly on bottom contact surface of pedestal base. Both operators gently lower sink back onto floor.

Apply quality mildew- resistant silicone caulk between pedestal base and finished floor. Do not load or use the sink within 24 hours after sealant application; allow full curing time.

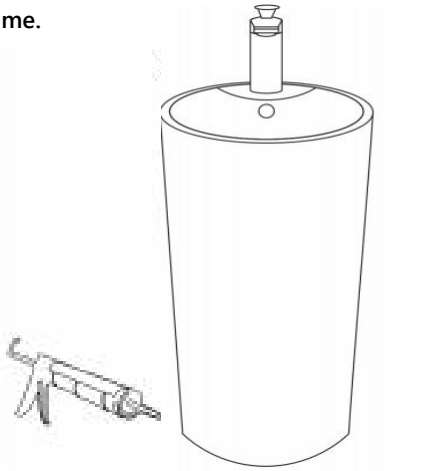

LIMITED WARRANTY COVERAGE

1- YEAR LIMITED MANUFACTURER WARRANTY

Our pedestal sink is built with premium ceramic material and strict craftsmanship for long- term household service. Within 1- year period from original delivery date, manufacturer will supply free replacement parts or whole- unit replacement, at our sole discretion, for confirmed manufacturing defects under normal residential installation, usage and maintenance. Warranty only applies for original retail purchaser; purchase receipt / invoice is mandatory for any warranty claim. Surface scratches, chip damage from improper handling are excluded from warranty scope.

This warranty covers factory production defects only. Keep original sales invoice as proof- of- purchase document. We reserve rights to select one remedy below for valid claim:

1. Repair or supply replacement defective parts / product without extra charge;
2. Issue full product purchase refund for claim submitted within 30 calendar days upon receiving goods;
3. Issue store credit for future new- product purchase. Return & shipping charges may apply under manufacturer's decision.

Important Warranty Pre- Condition: Installation must be completed by licensed, insured professional plumber. Warranty will become void if installed by non- licensed personnel.

This limited warranty does NOT cover damages caused by accident, physical impact, user negligence, improper installation, misuse, abuse, or cleaning with abrasive / alcohol- based chemical agents by installer, contractor or end- user. Manufacturer's liability is limited solely toward replacement components; labor expense, onsite service charge, indirect or consequential loss are not covered by warranty. Some local jurisdictions may not allow limitation on incidental damages. All other implied or statutory warranties are excluded to full extent permitted by law.

RESPONSIBILITIES OF INSTALLER & BUYER

Installer / contractor shall fully inspect sink unit for visible defect or damage before installation. Do NOT install damaged goods. All transit damage must be reported in writing to seller and freight carrier immediately upon receiving shipment. We are not liable for problems that could be detected during pre- installation inspection.

LIMITATIONS AND EXCLUSIONS

Warranty invalid if product is modified, altered, or serviced by non- authorized third party. Warranty excludes third- party external plumbing hardware not supplied by manufacturer. We take no responsibility for inconvenience, rental cost or indirect loss due to fixture failure.

WARRANTY SERVICE REQUEST CHECKLIST

When submitting warranty service request, prepare these materials:

- Copy of original purchase invoice
- Actual installation completion date
- Clear written defect description plus defect photos
- Product model identifier

Contact our customer support team to initiate warranty review for repair, replacement, refund or store credit resolution.