



LED Semi-Cutoff Wall Pack

3 CCT and 3 Wattage Selectable

Project: _____ Location: _____
Date: _____ Part #: _____
Notes: _____



Performance & Features

Product Highlights

- 3-CCT White Color Selectable (3000K/4000K/5000K)
- Energy-saving, long lifespan
- No UV or IR in the beam
- NO flickering, NO humming
- Green and eco-friendly without mercury

Certifications

- UL Listed, DLC 5.1 (Premium)
- 5 Year Limited Warranty
- FCC

Specification:

- Finish: Highly durable die-cast aluminum , long lasting dark bronze and white finish available
- IP: Wet Location Rated
- Beam Angle: H95°
- BUG Rating: B2-U4-G3/B2-U4-G4/B3-U5-G5
- LEDs: Lumileds SMD2835
- CRI: >80
- Operating Temp: -40°F to 122°F
- Lens: Prismatic
- Life: L70 of 100,000 hours

LED Driver

- 0-10V Dimming Standard
- 120-277V
- Built in 6kV Surge Protector
- Flicker- Free

Quick Order



Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
40W-60W-80W - Selectable WPLL-40T80W-3CCT-DV2-PC-CL-BZ WPLL-40T80W-3CCT-DV2-PC-CL-WH	40W/60W/80W	6,000 / 9,000 / 12,000	3CCT 3000K/4000K/5000K	150	Bronze or White
80W-100W-120W - Selectable WPLL-80T120W-3CCT-DV2-PC-CL-BZ WPLL-80T120W-3CCT-DV2-PC-CL-WH	80W/100W/120W	12,000 / 15,000 / 18,000	3CCT 3000K/4000K/5000K	150	Bronze or White

Contact for custom configuration & specifications



Bronze & White finishes available

Dimensions

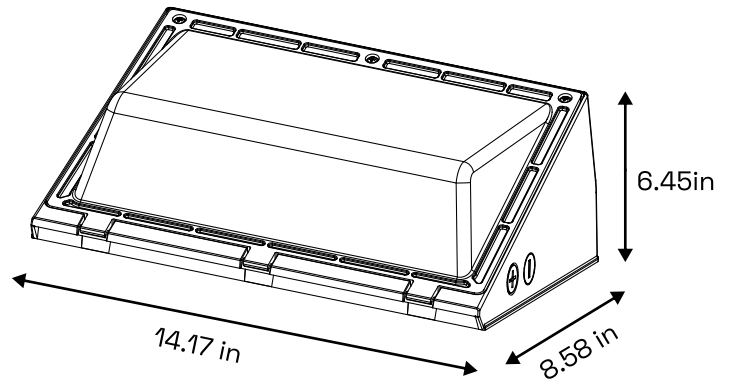
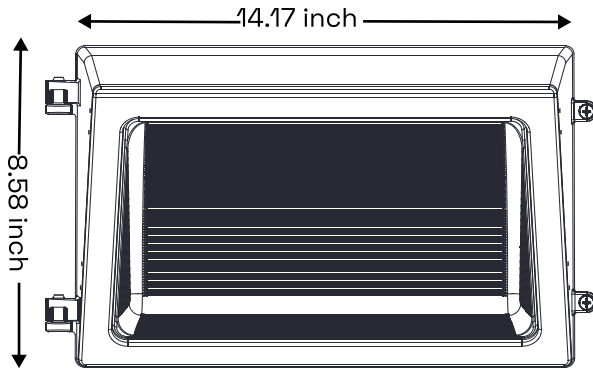


Packaging Dimensions

SKU#	Master Carton	Qty
WPLL-40T80W-3CCT-DV2-PC-CL-BZ WPLL-40T80W-3CCT-DV2-PC-CL-WH	16.14x11.41x9.44in	1
WPLL-80T120W-3CCT-DV2-PC-CL-BZ WPLL-80T120W-3CCT-DV2-PC-CL-WH	16.14x11.41x9.44in	1

Photometry

WPLL-40T80W-3CCT-DV2-PC-CL-BZ
WPLL-40T80W-3CCT-DV2-PC-CL-WH

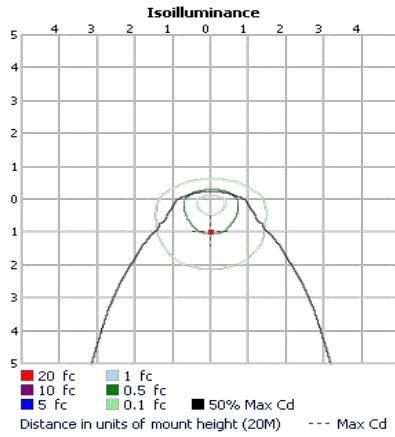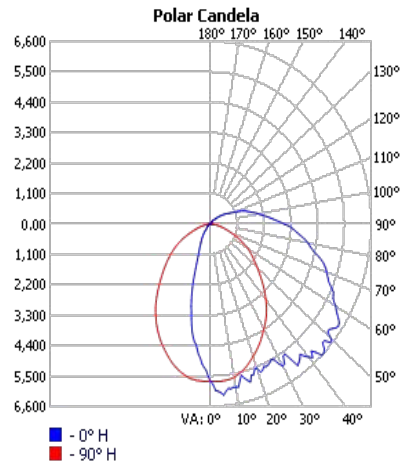

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	3,697.3	21.9%	21.9%
0-40	5,774.9	34.3%	34.3%
0-60	10,203.6	60.5%	60.5%
60-90	4,745.2	28.1%	28.1%
70-100	3,560.8	21.1%	21.1%
90-120	1,620.8	9.6%	9.6%
0-90	14,948.8	88.7%	88.7%
90-180	1,909.8	11.3%	11.3%
0-180	16,858.6	100%	100%

BUG Rating

B3 - U5 - G5

Forward Light	Lumens	Lumens %
Low(0-30):	2,331.5	13.8%
Medium(30-60):	5,401.9	32%
High(60-80):	3,349.9	19.9%
Very High(80-90):	1,144.9	6.8%
Back Light		
Low(0-30):	1,366.2	8.1%
Medium(30-60):	1,105.7	6.6%
High(60-80):	219.8	1.3%
Very High(80-90):	29.9	0.2%
Uplight		
Low(90-100):	792.7	4.7%
High(100-180):	1,116.8	6.6%
Trapped Light:	0.0	0%

Note: Additional Photometry available on request