



Parts

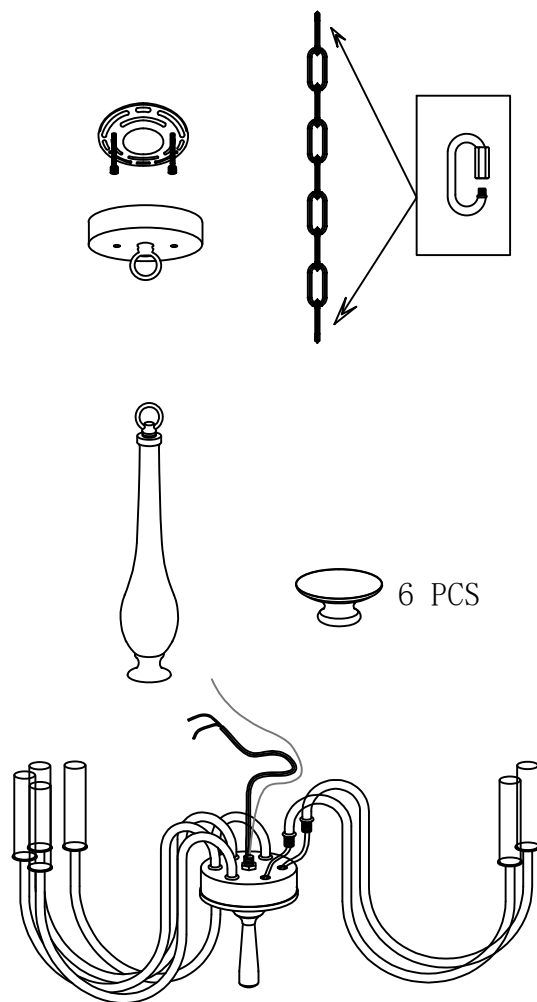


6 PCS

Steps 1

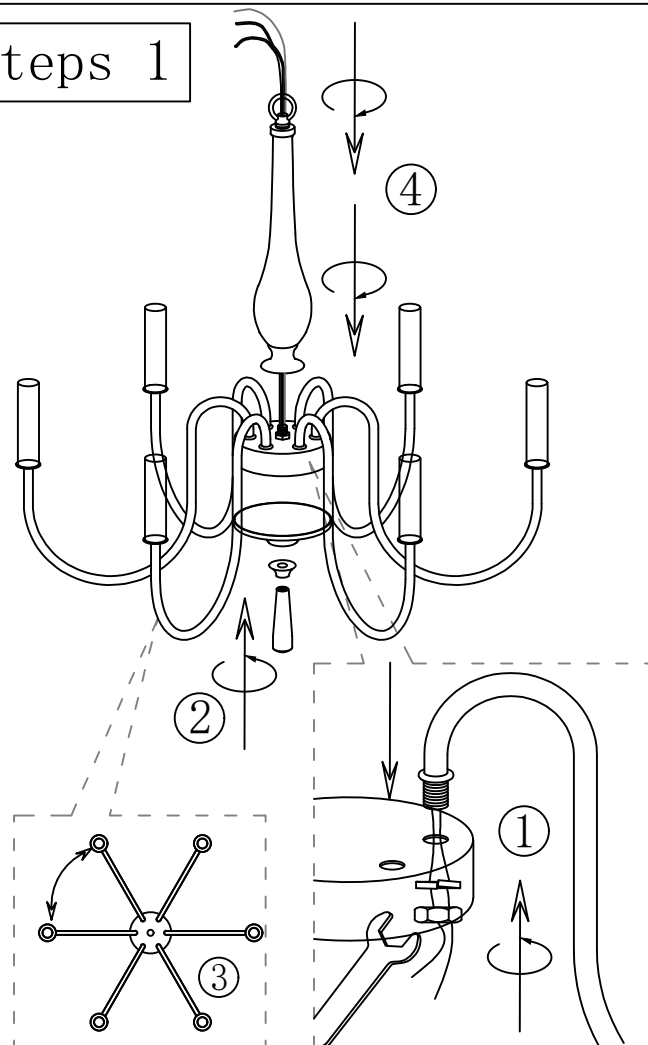

1. As shown in the figure, remove the cover and iron, install the two loose lamp arms on the lamp, and tighten them with a wrench.
2. As shown in the figure, install the cover and twist the bullet-shaped part together with the cover onto the lamp holder.
3. As shown in the figure, adjust the angle of the lamp arms.
4. As shown in the figure, pass the main line of the lamp through the round column and assemble it together.

Steps 2

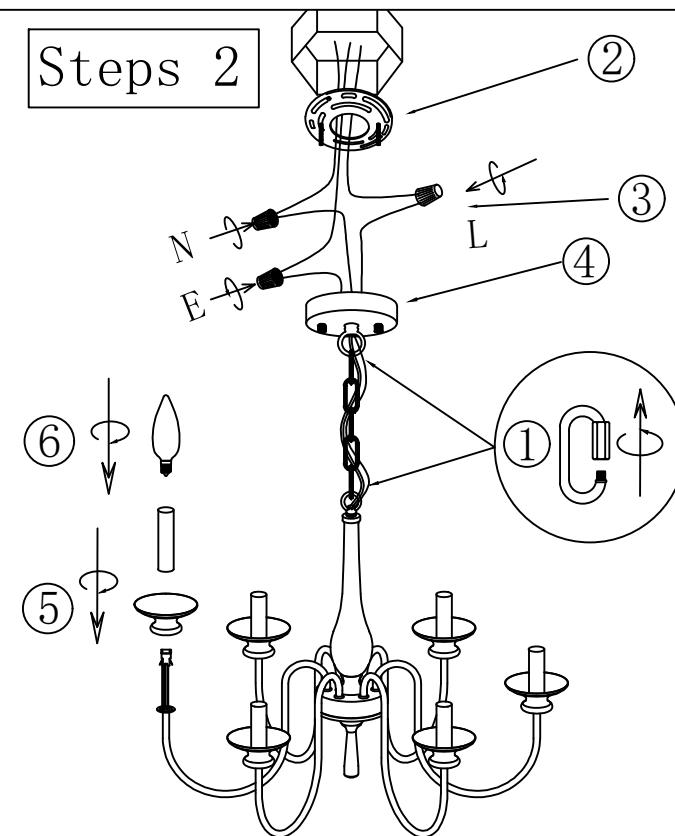

1. Unscrew the lock on the sling (as shown in the picture), connect the lamp with the sling through the lock, and then tighten the lock. Pass the power cord through the sling as shown. (Install the hanging rod according to the length of the hanging rod you need)
2. Assembled the mounting bracket to the ceiling junction box with the screw.
3. Connect the power cord out from the ceiling junction to lamp wires with the lead wire and wire nut. According wire color to connect. (black for "L", white for "N", copper wire for "Ground E")
4. Assemble the canopy to the mounting bracket by tightening the ball nuts.
5. Remove the round tubes on the 6 lamp arms, install the horn-shaped cover, and then install the round tubes back.
6. Install the bulb. Bulbs need to be purchased separately.