

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers

***PARTS SHOWN MAY DIFFERSLIGHTLY PER LIGHT FIXTURE**

HARDWARE INCLUDED

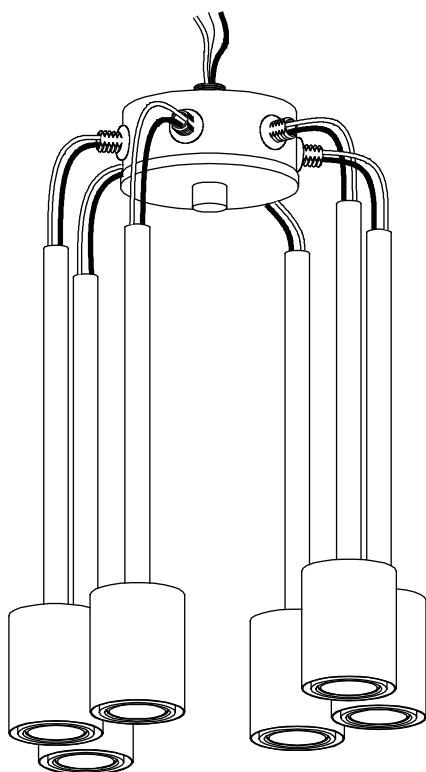


Fixture (Arms)

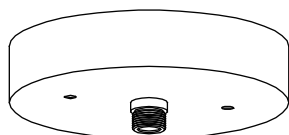

Canopy



Stem



Mounting Unit



Wire Nuts




Ball Nuts




Mounting Screws

EXPLODED PARTS

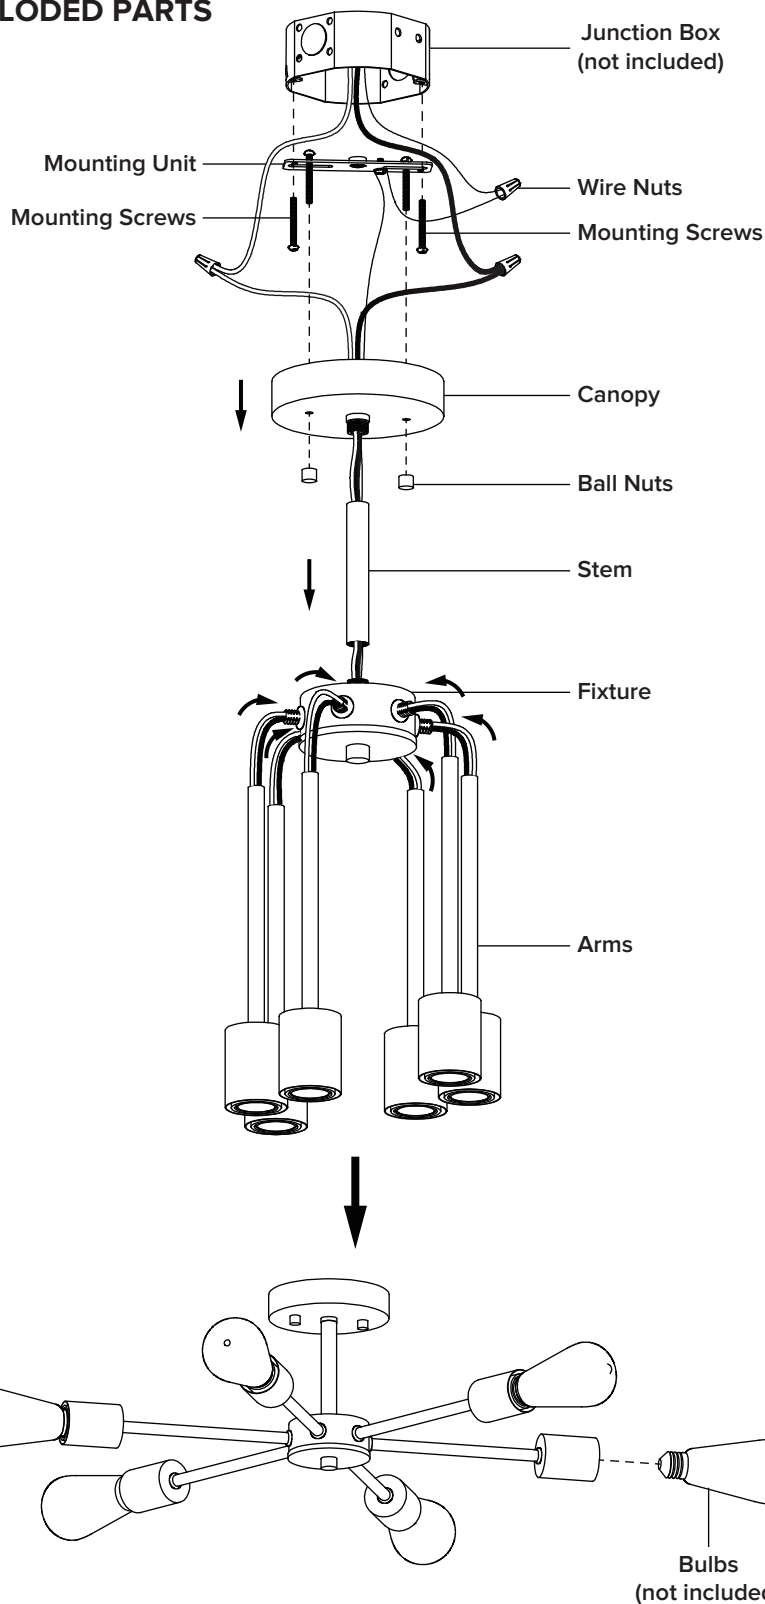


STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

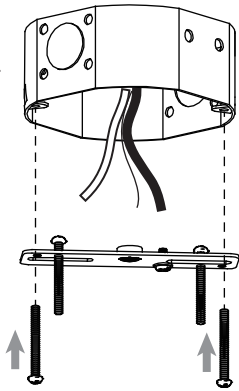


STEP 2

Install the **arms** onto **fixture**.

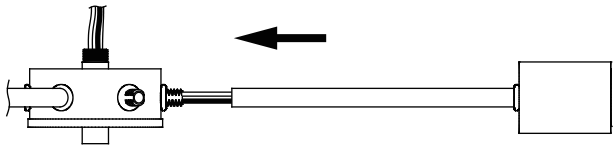



STEP 3

Secure the **canopy** and **stem** to the **fixture**.

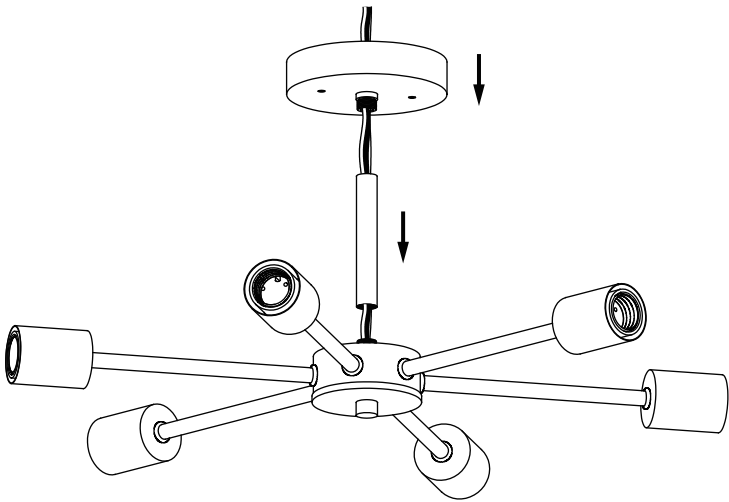


STEP 4

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

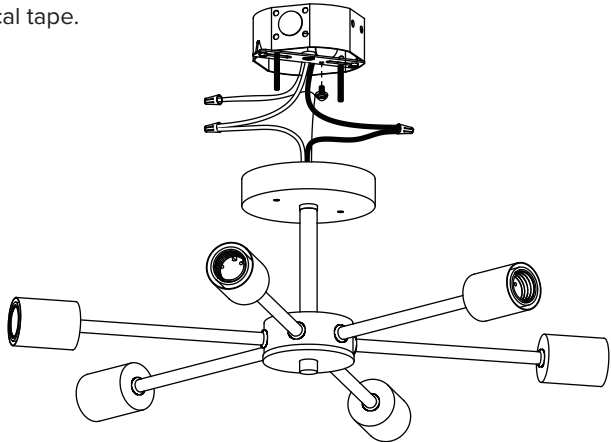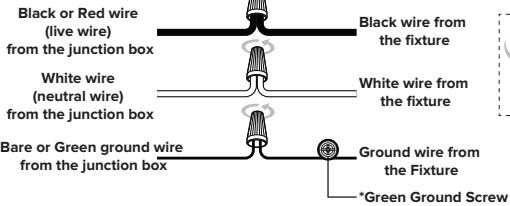


STEP 5

Attach the **fixture** to the **mounting unit** through **screw holes** as shown, and secure it with **ball nuts**.

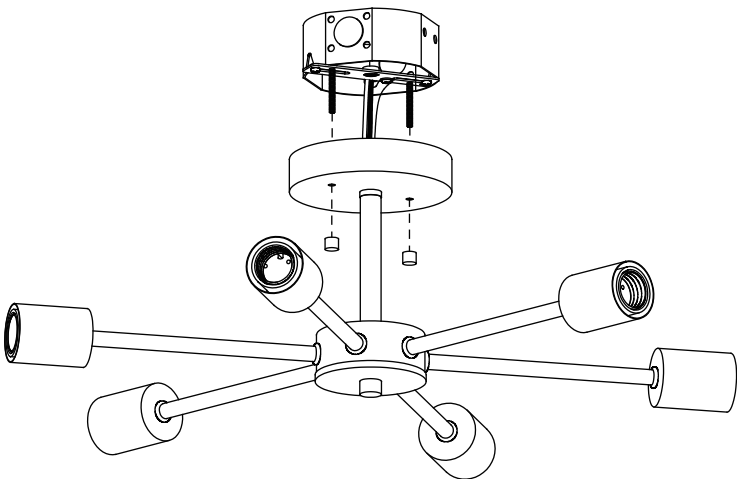

STEP 6

Install bulbs (not included).

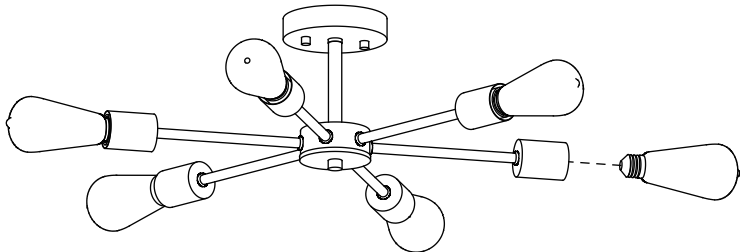

BULB BASE TYPE
Medium (E26)