



Hint® | K-T25740-4

Deck-mount bath faucet trim

Features

- Two Lever handles offer separate control of hot and cold water
- 10.0 gpm (37.9 lpm) maximum flow rate at 45 psi (3.1 bar)
- Coordinates with products in the Hint® collection



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
BN	Vibrant Brushed Nickel
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 03:23 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1

ADA

ICC/ANSI A117.1

CSA B651

OBC

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 7-7/16" (189 mm)

Flow Rate

Faucet Flow Rate: 10 gpm (37.9 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Required Products/Accessories

- K-300-K 1/2" ceramic high-flow valve system

or

- K-300-KR 1/2" ceramic high-flow valve with rigid connections

or

- K-301-K 3/4" ceramic high-flow valve system

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 03:23 - US-CA

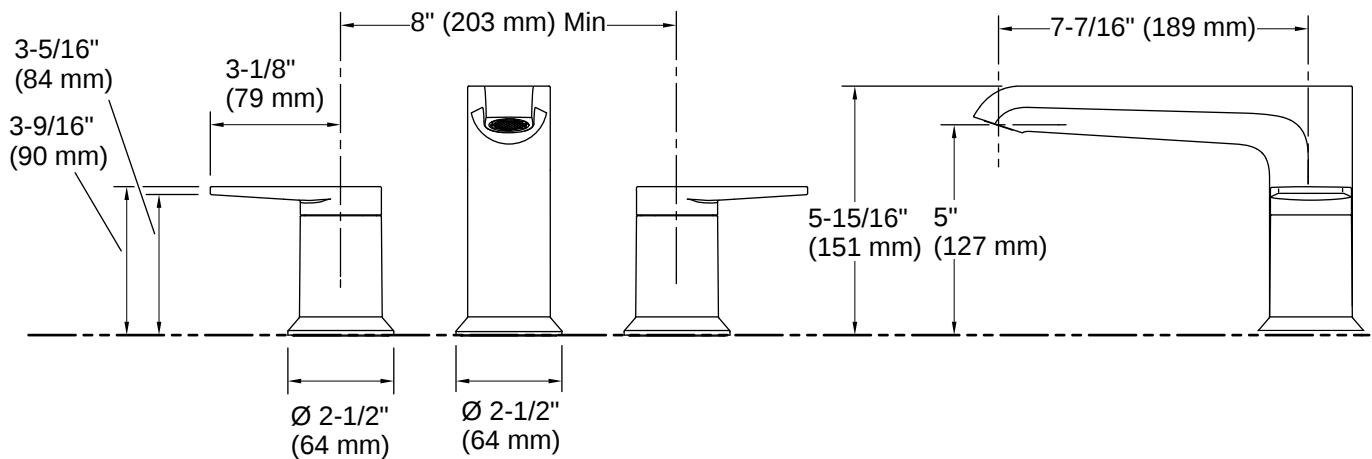

Installation

- Three-hole
- Deck-mount
- Trim only; requires valve to complete installation (sold separately)

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

