


ITEM: 317-1W

INNOVATIONS LIGHTING
CREATIVITY MEETS EVOLUTIONARY DESIGN®
DESIGN COPYRIGHT - 10/20/2021
ALL RIGHTS RESERVED AND MAY
NOT BE DUPLICATED WITHOUT OUR
WRITTEN PERMISSION

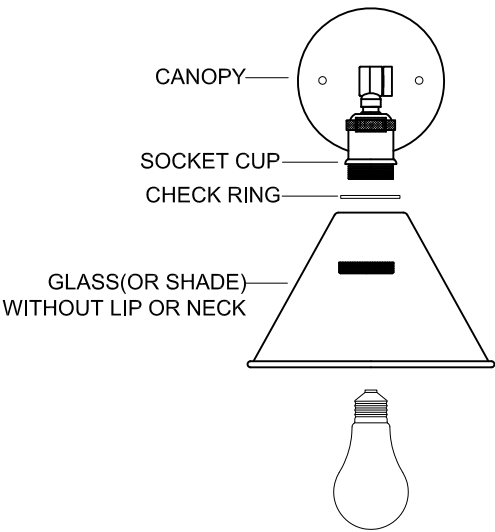


BALLSTON ASSEMBLY
SLIDE DECORATIVE CHECK RING
AND SHADE ONTO THREADED
SOCKET CUP AND SECURE USING
THREADED SOCKET RING.
DO NOT OVER TIGHTEN
THREADED SOCKET RING TO
AVOID BREAKING THE GLASS

SHADE STYLE & BULB OPTIONAL
IF THE GLASS YOU SELECTED DOES
NOT HAVE A LIP OR
NECK THE HR-314B HOLDER IS NOT NEEDED
TO ATTACH THE GLASS -PLEASE DISCARD IT



ITEM: 917-1W

INNOVATIONS LIGHTING
CREATIVITY MEETS EVOLUTIONARY DESIGN®
DESIGN COPYRIGHT - 10/20/2021
ALL RIGHTS RESERVED AND MAY
NOT BE DUPLICATED WITHOUT OUR
WRITTEN PERMISSION

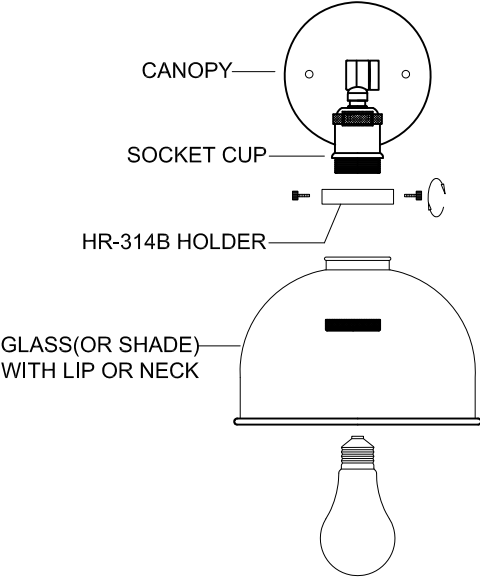

BALLSTON URBAN ASSEMBLY
ATTACH THE HR-314B HOLDER TO
THREADED SOCKET CUP USING
THREADED SOCKET RING
SLIDE SHADE INTO THE HR-314B
HOLDER, TIGHTEN THE (3)
THUMB SCREWS EVENLY TO
HOLD GLASS IN PLACE
DO NOT OVER TIGHTEN THUMB
SCREWS TO AVOID BREAKING
THE GLASS

SHADE STYLE & BULB OPTIONAL
IF THE GLASS YOU SELECTED HAS A LIP OR
NECK THE HR-314B HOLDER IS NEEDED TO
ATTACH THE GLASS

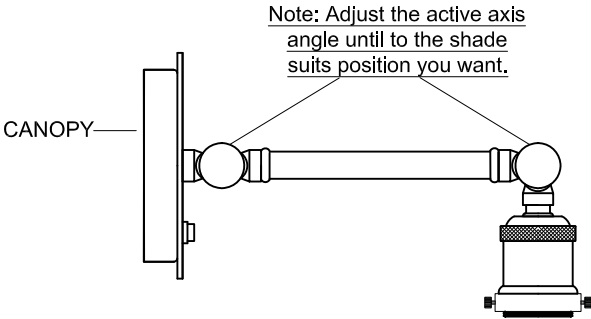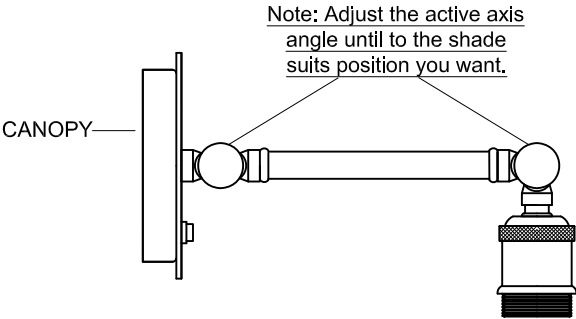


THANK YOU FOR PURCHASING A FIXTURE FROM OUR BALLSTON COLLECTION

Please FIRST take a look at your glass/metal shade to see if it looks like A (no neck) or B (with a neck)
YOU WILL FIND BOTH THE CHECK RING (for A - which might not be needed depending on the thickness of the glass)
AND the HOLDER with screw (FOR B)

Please continue to follow the below graphic illustration as shown
WE ENCOURAGE YOU TO SAVE THE EXTRA PART. You might decide to change your glass and will need it in the future
(instead of replacing the entire fixture for a new look)

A no neck

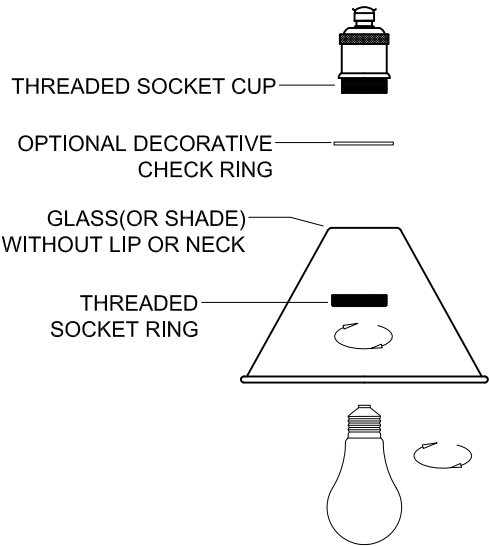

Glass Assembly
(glass without lip or neck)
SLIDE OPTIONAL DECORATIVE
CHECK RING AND SHADE ONTO
THREADED SOCKET CUP AND
SECURE USING THREADED
SOCKET RING

DO NOT OVER TIGHTEN
THREADED SOCKET RING TO
AVOID BREAKING THE GLASS OR
METAL SHADE


THIS ASSEMBLY DOES NOT USE
HR-314B HOLDER.

ITEM: 317-1W
917-1W

**GLASS OR METAL SHADE AND
BULB STYLE OPTIONAL**

INNOVATIONS LIGHTING
CREATIVITY MEETS EVOLUTIONARY DESIGN®
DESIGN COPYRIGHT - 10/20/2021
ALL RIGHTS RESERVED AND MAY
NOT BE DUPLICATED WITHOUT OUR
WRITTEN PERMISSION

B neck

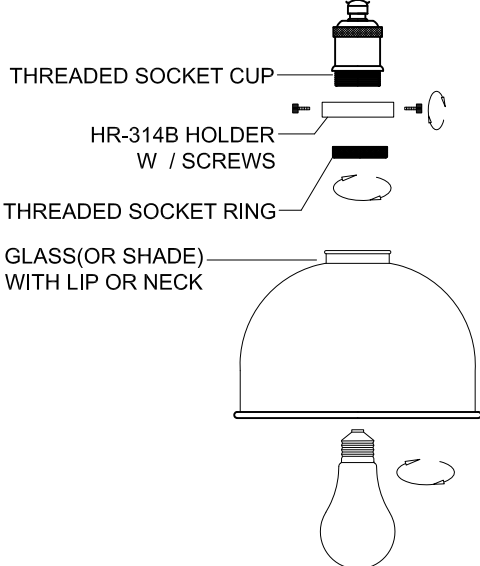


Glass Assembly
(glass with lip or neck)
ATTACH THE HR-314B HOLDER TO
THREADED SOCKET CUP USING
THREADED SOCKET RING.
SLIDE SHADE INTO THE HR-314B
HOLDER, TIGHTEN THE (3) THUMB
SCREWS EVENLY TO HOLD SHADE
IN PLACE
DO NOT OVER TIGHTEN THUMB
SCREWS TO AVOID BREAKING
THE GLASS OR METAL SHADE

THIS ASSEMBLY DOES NOT
USE DECORATIVE CHECK RING
(might not be needed if glass is thick)

INNOVATIONS LIGHTING
CREATIVITY MEETS EVOLUTIONARY DESIGN®

STANDARD MOUNTING PLATE INSTALLATION INSTRUCTIONS

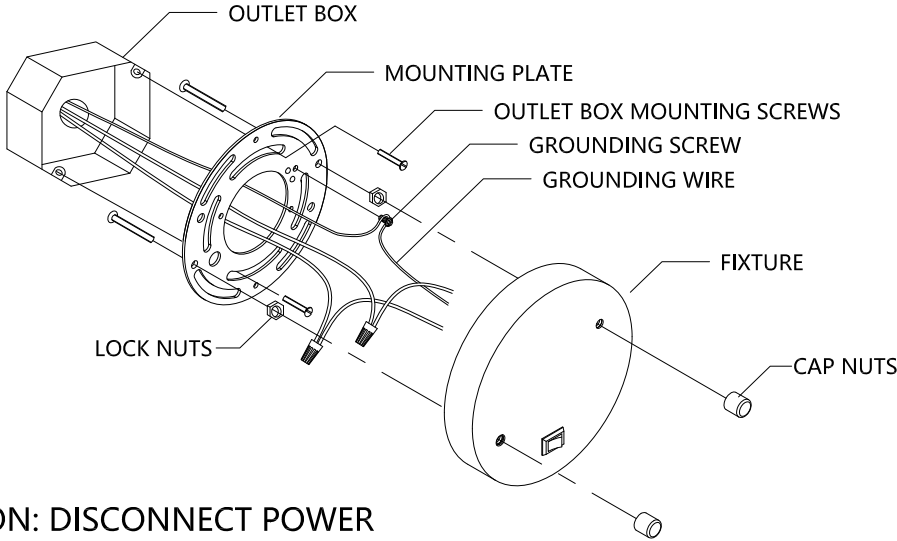

CAUTION: DISCONNECT POWER
DURING INSTALLATION

1. If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Thread the machine screws into the opposite side of the mounting plate from the green ground screw, lock the machine screws into place with lock nuts.
3. Fasten the mounting plate to the outlet box using the two screws supplied with the outlet box.
4. Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.
5. Grounding instructions:
A.) On fixtures where mounting plate is provided with a green ground screw and two raised dimples, Wrap ground wire from outlet box around green ground screw and tighten.
B.) On fixtures where mounting plate is provided with a green ground wire attached. Connect mounting plate ground wire to ground wire from outlet box with wire connector (not provided). If fixture is provided with ground wire. Connect fixture ground wire to ground wire from outlet box with wire connector (not provided). After following the above steps. Never connect ground wire to black or white power supply wires.
6. To make electrical connections: Connect the white wire(s) from the fixture to the white wire of this outlet box. Connect the black wire (s) from the fixture to the black wire of the outlet box. NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/or have a silver conductor.
7. Place fixture against mounting surface allowing the machine screws to pass through the fixture canopy. Secure the cap nuts.