





Trampoline Jumping Mat

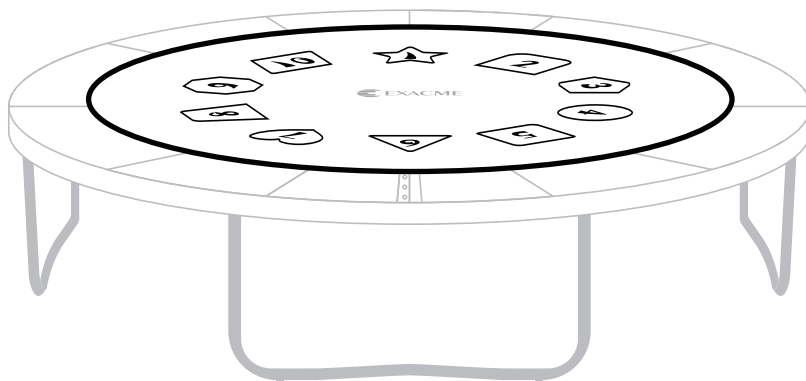

6181 - JB

Newacme LLC, 2808 Vail Ave Commerce, CA, 90040
1-323-597-1109

www.exacme.com

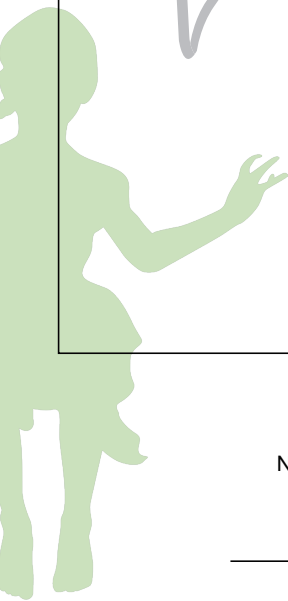

Hello,

Thank you for choosing ExacMe Jumping Mat.

If there is any part defective, please contact us at SALES@EXACME.COM or 877-608-0775.

I. WARNING

- Always respect the jumping mat conditions before using, avoid sagging, losing stitching, punctures, holes, or tears of the trampoline mat.
- For safety, only one person is allowed at the same time.
- Do not allow pets or animals to get inside the jumping area.
- Clean with water hose, soap and detergent. Never use pressure washer and a cleaner with bleach.
- Protect the mat with a cover in rainy or snowy days, and store it away when not in use.

II. PURCHASE GUIDE

Product ID	Jumping Mat Diameter	Fit Trampoline Model		
		Frame Diameter	Spring Length	Spring Amount
6181-JB08	79.5"	96"	5.5"	48
6181-JB10	103.1"	120"	5.5"	64
6181-JB12	124.8"	144"	6.5"	72
6181-JB13	136.6"	156"	6.5"	84
6181-JB14	148.8"	168"	6.5"	96
6181-JB15	159.8"	180"	7"	108
6181-JB16	170.5"	192"	7"	108


IMPORTANT:

- Before assembly, please measure to make sure that the pad is the right size to fit your trampoline perfectly.

MEASURING GUIDE:

1. Measure frame diameter

Measure across the middle of the trampoline from outside frame to outside frame, straight across the middle.

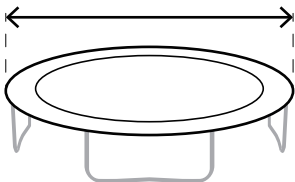


2. Measure Unstretched Spring Length

Take a spring OFF, measure it from hook-end to hook-end when it is fully recoiled.




3. Count the Springs

Count the number of the spring holes along the top rail of your trampoline frame.



4. Measure Your Mat Diameter


Measure across the middle (Do NOT include v-rings) if it is still attached to your trampoline.

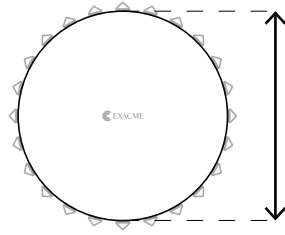

III. ASSEMBLY


PART LIST

A



Jumping Mat x1

B




Spring Puller x2



ASSEMBLY

⚠ WARNING:

- Assemble with at least 2 people that stand at the opposite side.
- Always install another spring in the opposite position when a spring is attached. Do not assemble the springs one by one which may cause deformation due to uneven force.


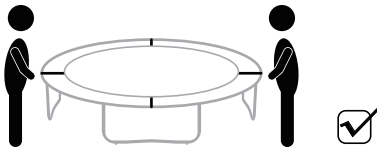


- When moving, do not pull the trampoline from one side. It is better 2-3 people lift the trampoline on opposite sides of frame.

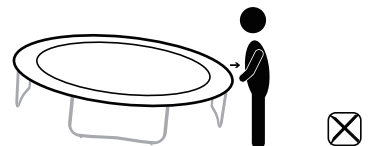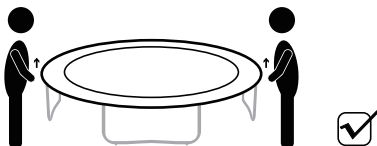

Step 1



Please firstly install 4 springs at 3, 6, 9, 12 o'clock.

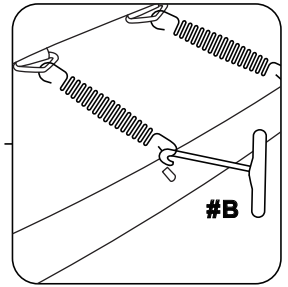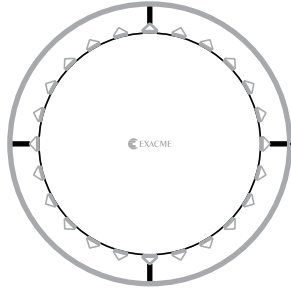

Step 2


Attach the next 4 springs right in the middle of every two springs that have been installed.

Then install the next 8 springs in the same way.

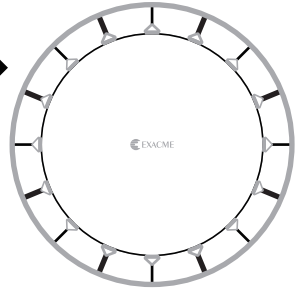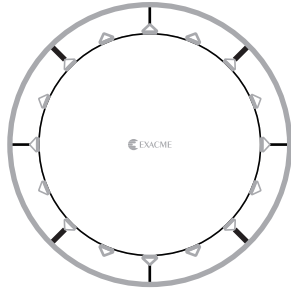

Step 3

Attach remaining springs until all the springs are placed on the frame.

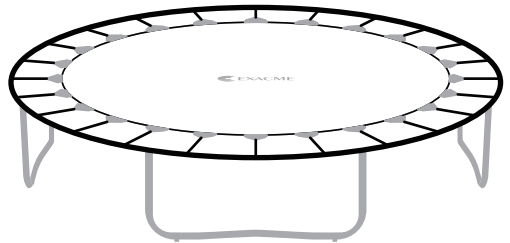

IV. WARRANTY AND RETURN POLICY

- 6-month limited warranty from the purchase date.
- Damages caused by weather (including but not limited to sun, winds, rains, snow) are excluded from the warranty.
- 30-day return frame for unused and unopened product, original box is required.

V. CUSTOMER SERVICE

- Please contact ExacMe at sales@exacme.com or 877-608-0775 with your order number, pictures or videos, and the inquiry details.
- Check the Spam, your Message Settings if you do not receive a reply in 24 hours after sending out the email.