

artos[®]

F802-6

INSTALLATION GUIDE

kascade 3-hole wall
mount tub filler

BRUSHED NICKEL(BN)



CHROME(CH)





F802-6

kascade 3-hole wall
mount tub filler

OPERATING SPECIFICATIONS

for associated valves | F906A-V0



OPERATING PRESSURE

Minimum: 15 psi

Maximum: 125 psi

FLOW CAPACITY

5.6USGPM@60 psi (each valve)

TOTAL= 11.2USGPM

INLET/OUTLET

1/2" Female NPT

STANDARDS

ASSE 1016.ASME A112.18.1/CSA B123.1 Certified

CODES


CUPC Approved

artos[®]

F802-6

PRODUCT DIMENSIONS


cascade 3-hole wall
mount tub filler

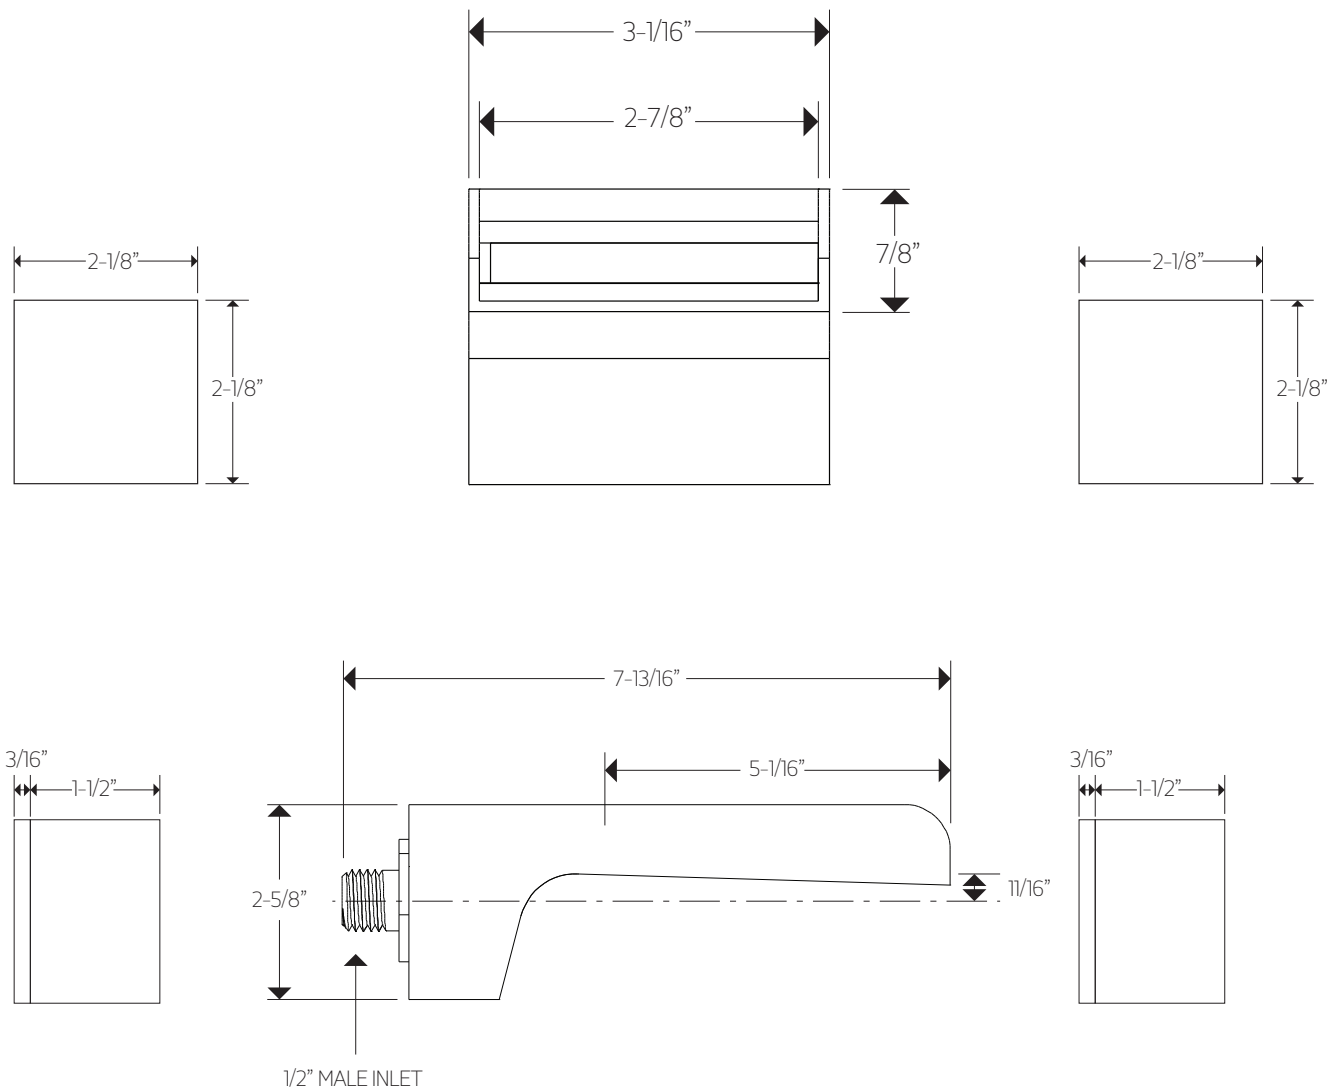


F802-6

kascade 3-hole wall
mount tub filler

STEP 1 LOOSEN (2) SET SCREW WITH ALLEN WRENCH TO REMOVE TUB FILLER CONNECTOR, SET ASIDE

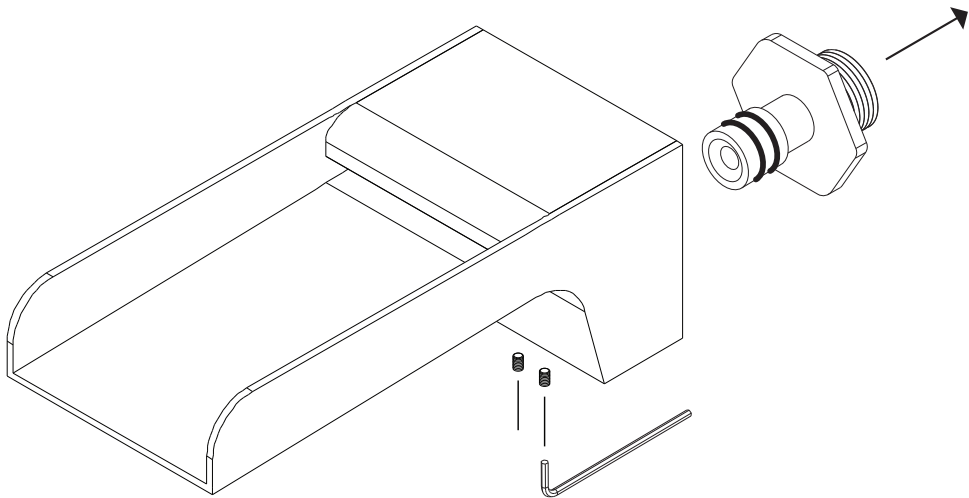

STEP 2




FRONT OF VALVES TO
FINISH WALL SURFACE
MAX= 3"
MIN= 1"

1-1/2"
HOLES THROUGH
FINISHED WALL



INSTALLATION STEPS

STEP 3 IMPORTANT: IF USING HEAT NEAR THE VALVE BODY PLEASE REMOVE CARTRIDGE.

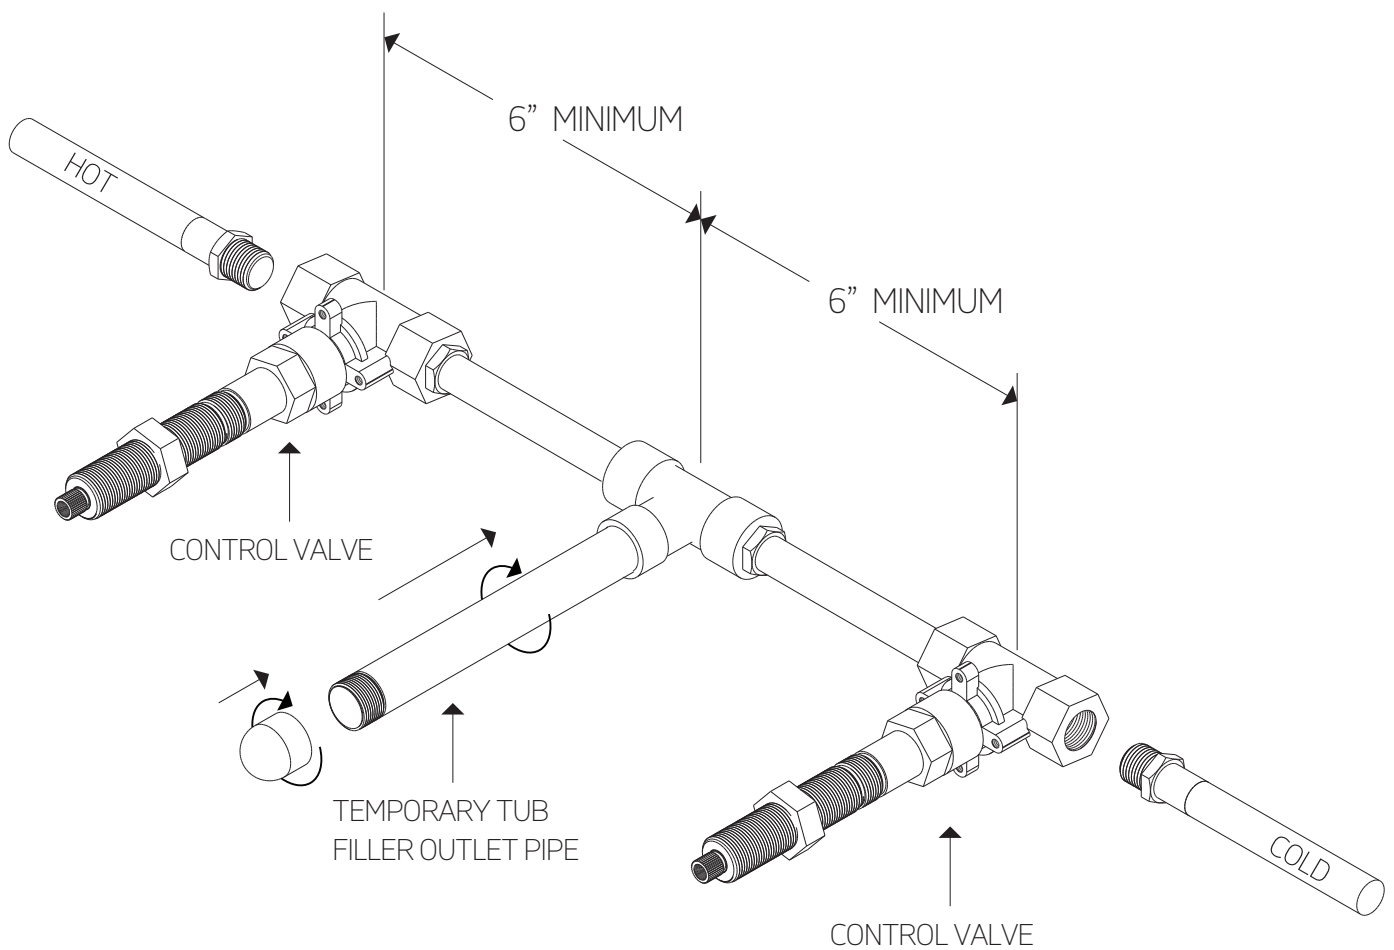


artos[®]


F802-6

kascade 3-hole wall
mount tub filler

STEP 4

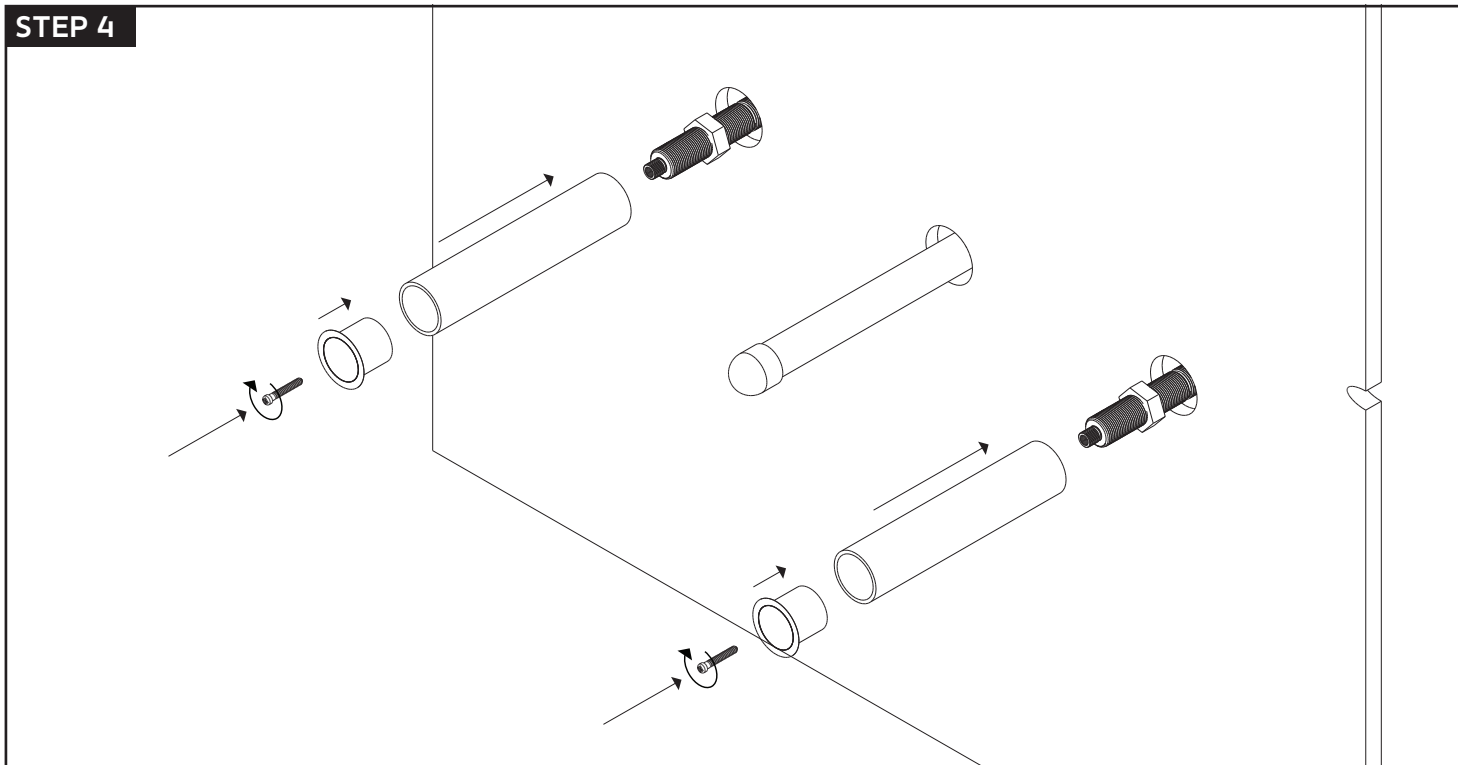


STEP 5

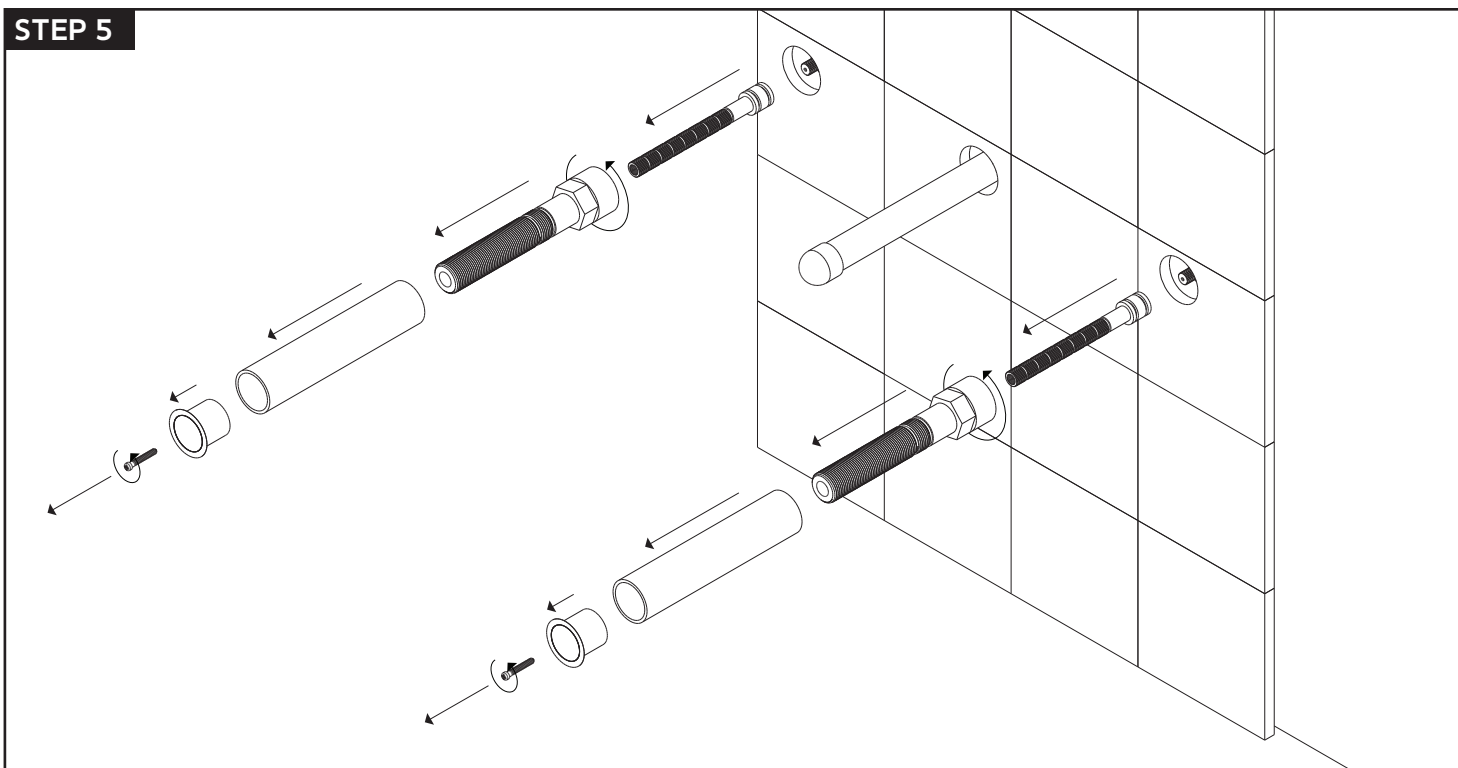


INSTALLATION STEPS

STEP 6 REFIT OUTER SPINDLES ONLY.

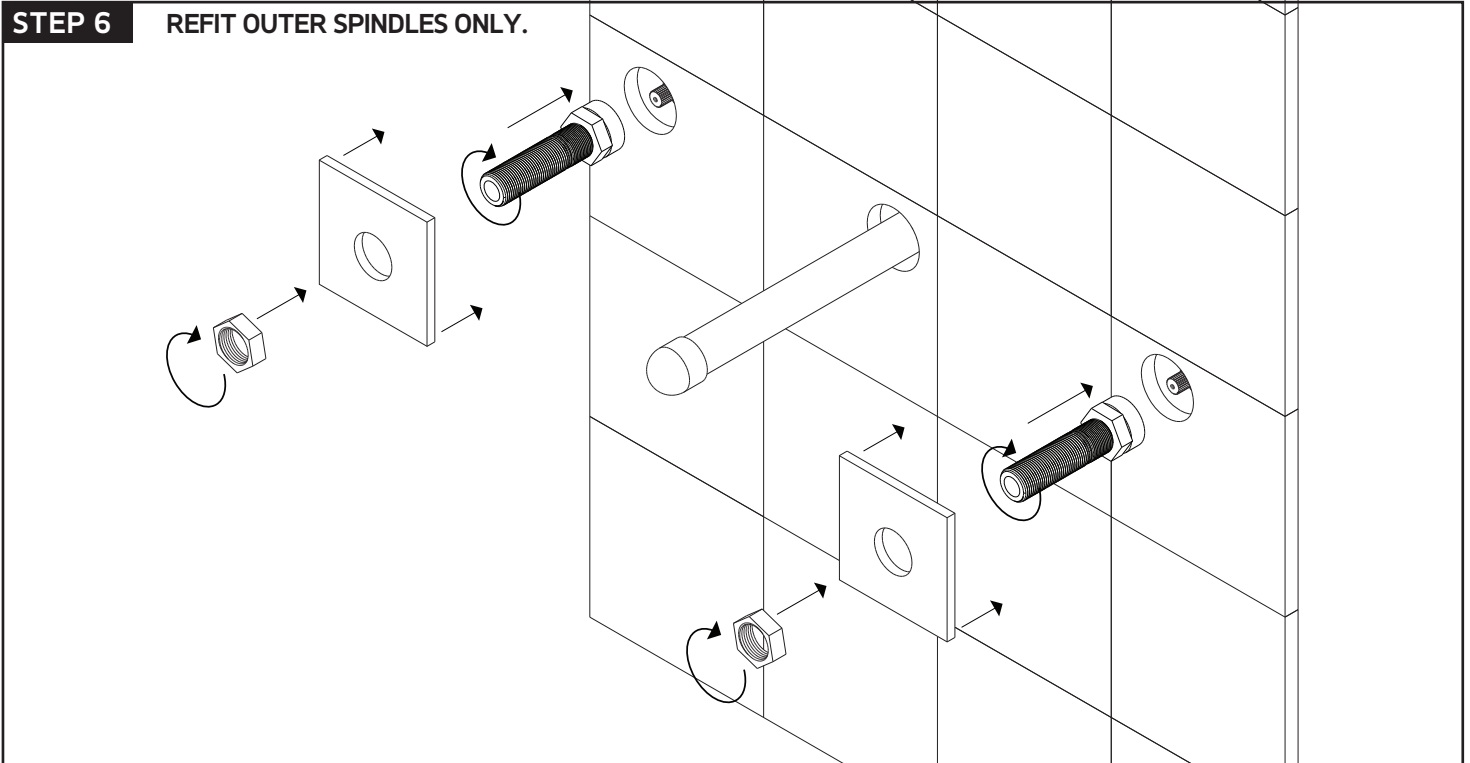


STEP 7

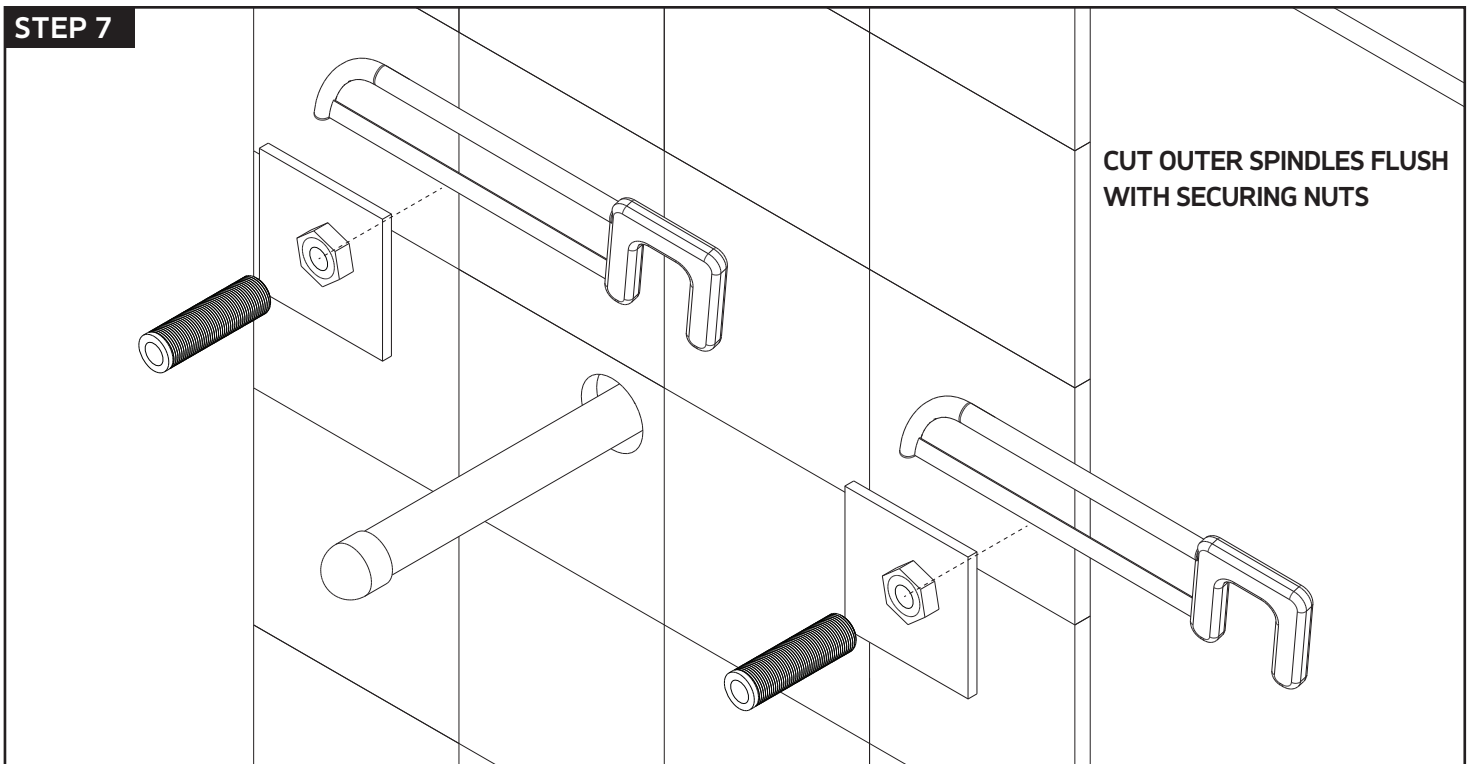


F802-6

kascade 3-hole wall
mount tub filler

STEP 8

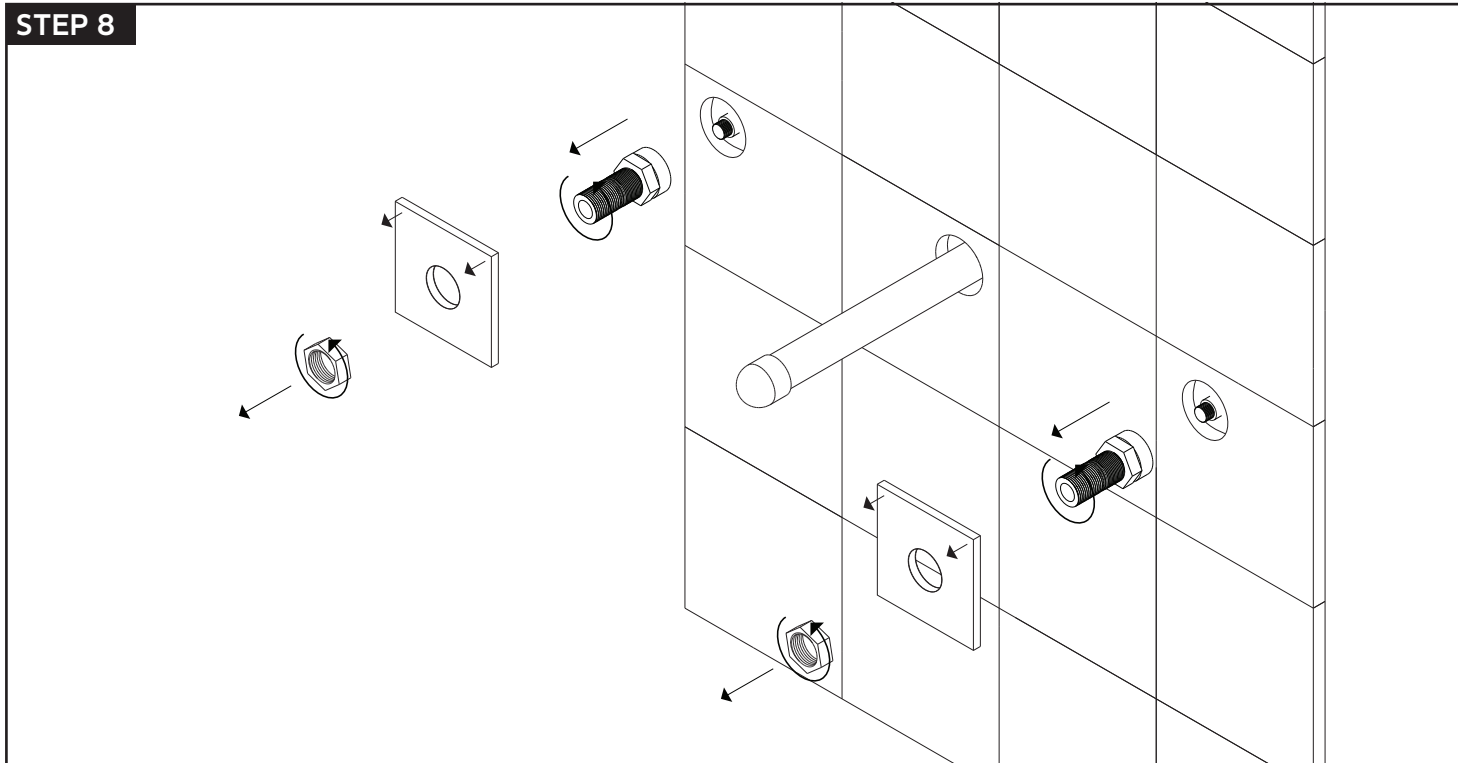


STEP 9

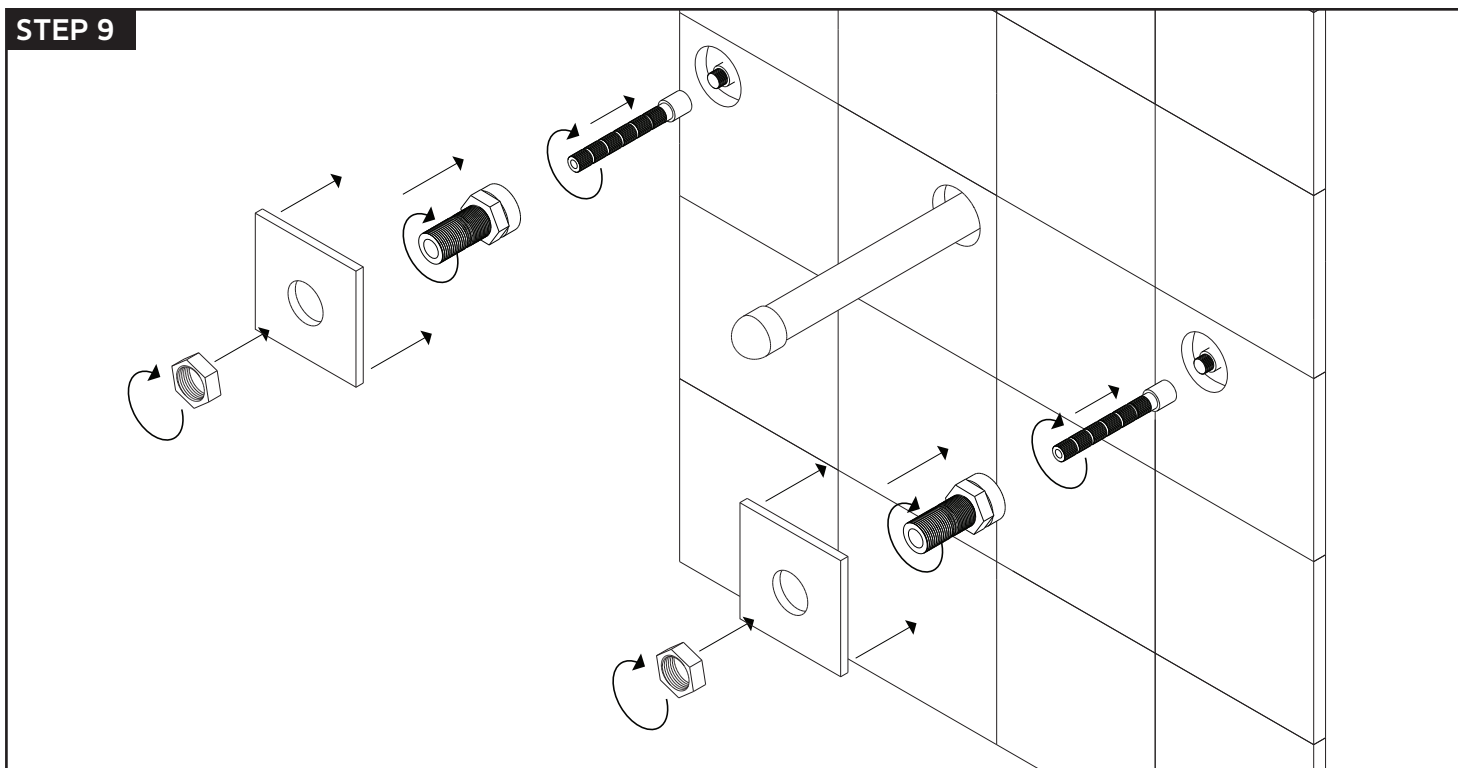


INSTALLATION STEPS

STEP 10

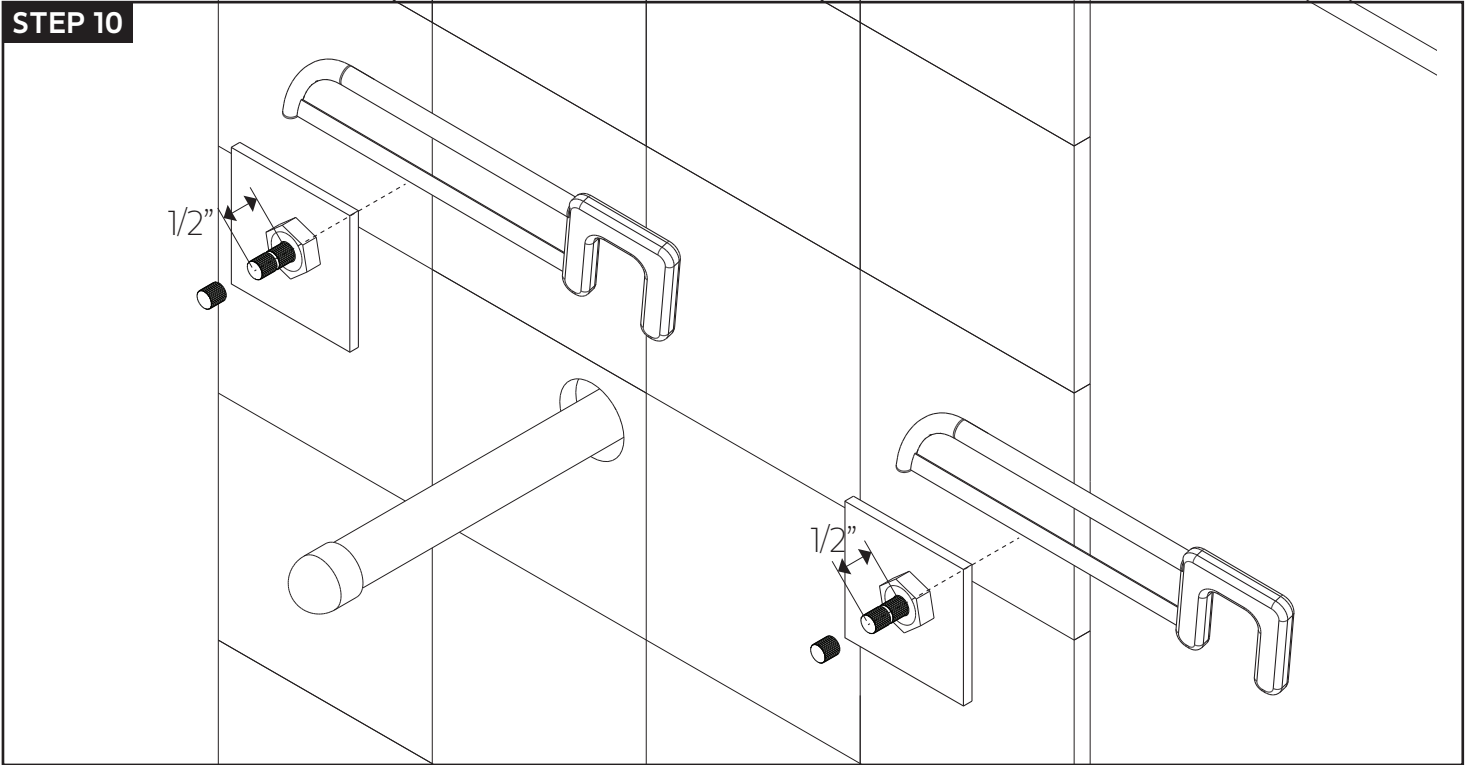


STEP 11

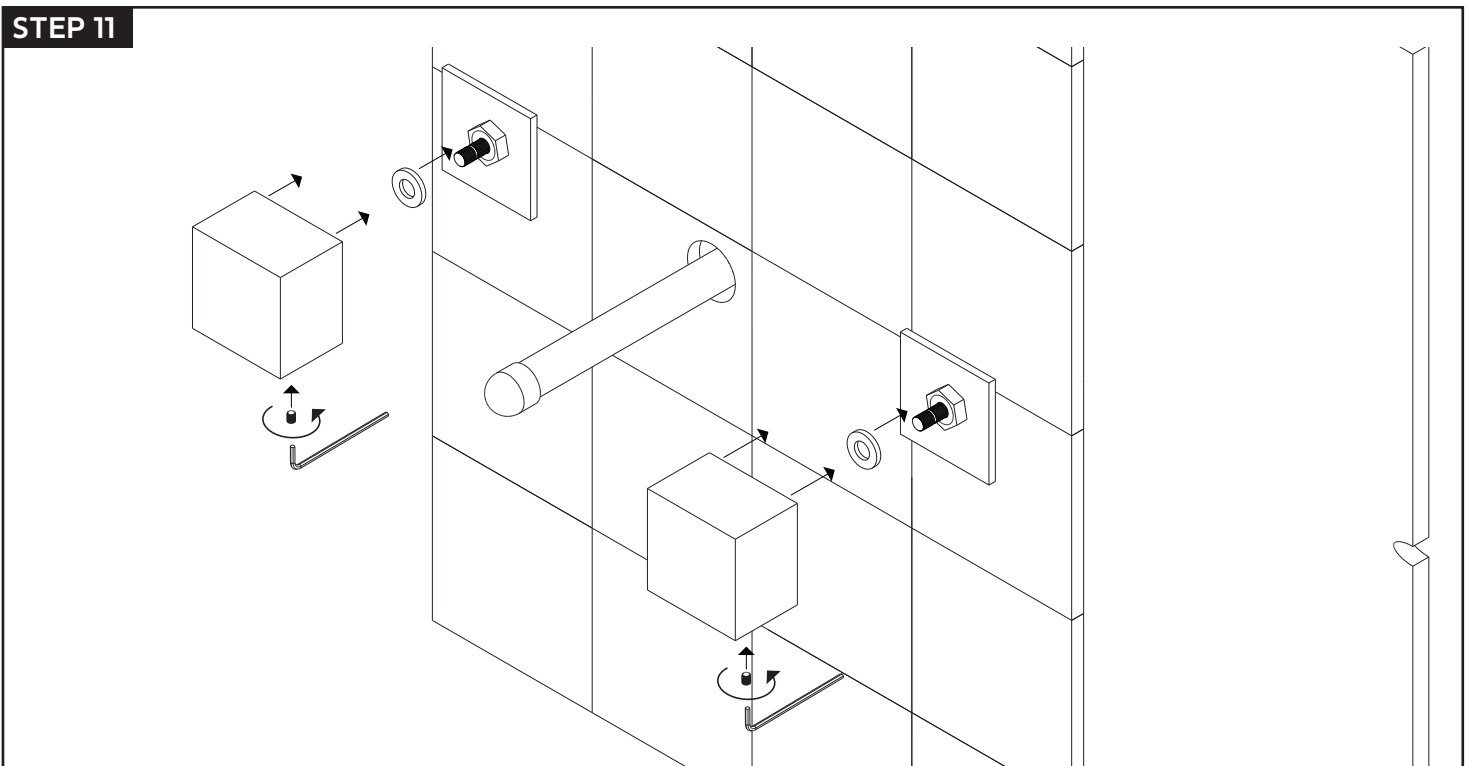


F802-6

kascade 3-hole wall
mount tub filler

STEP 12

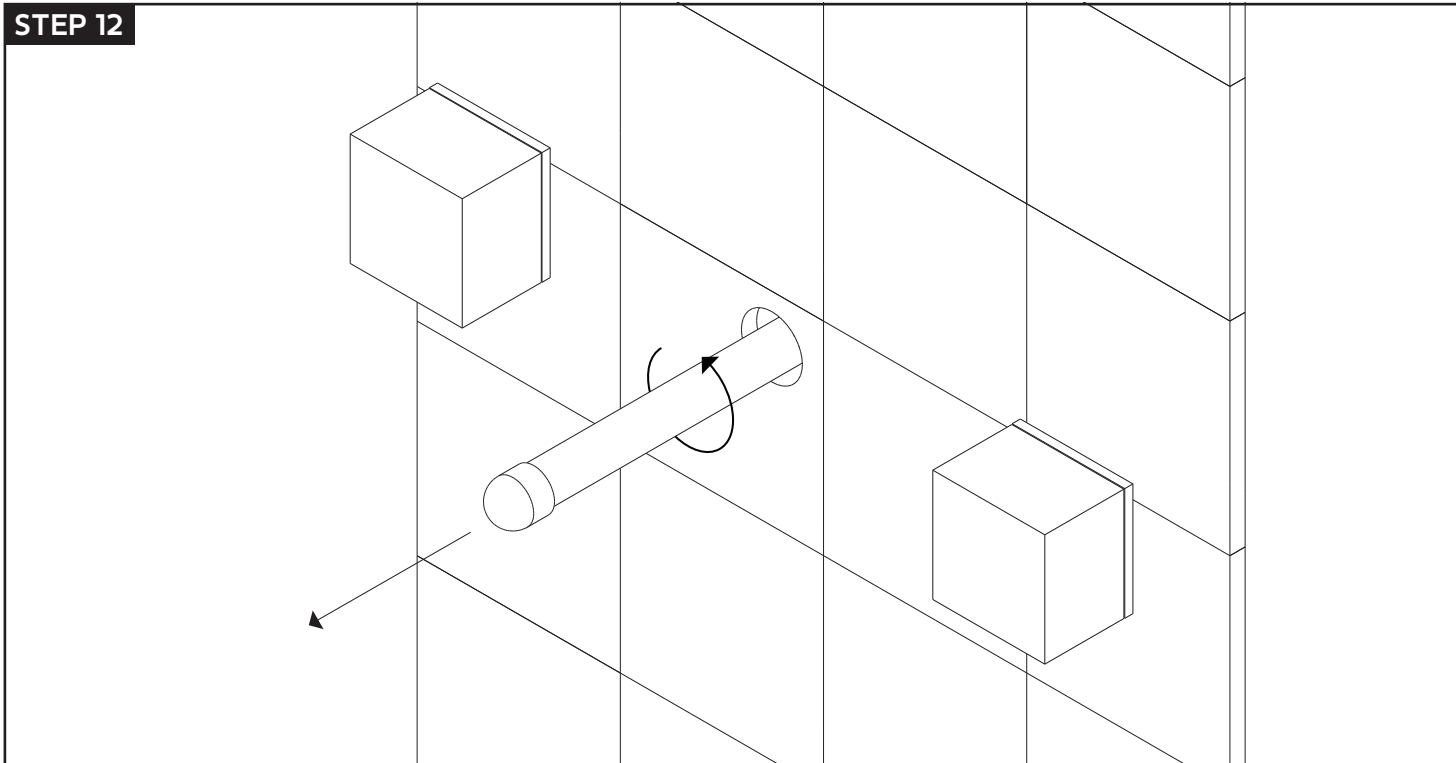


STEP 13

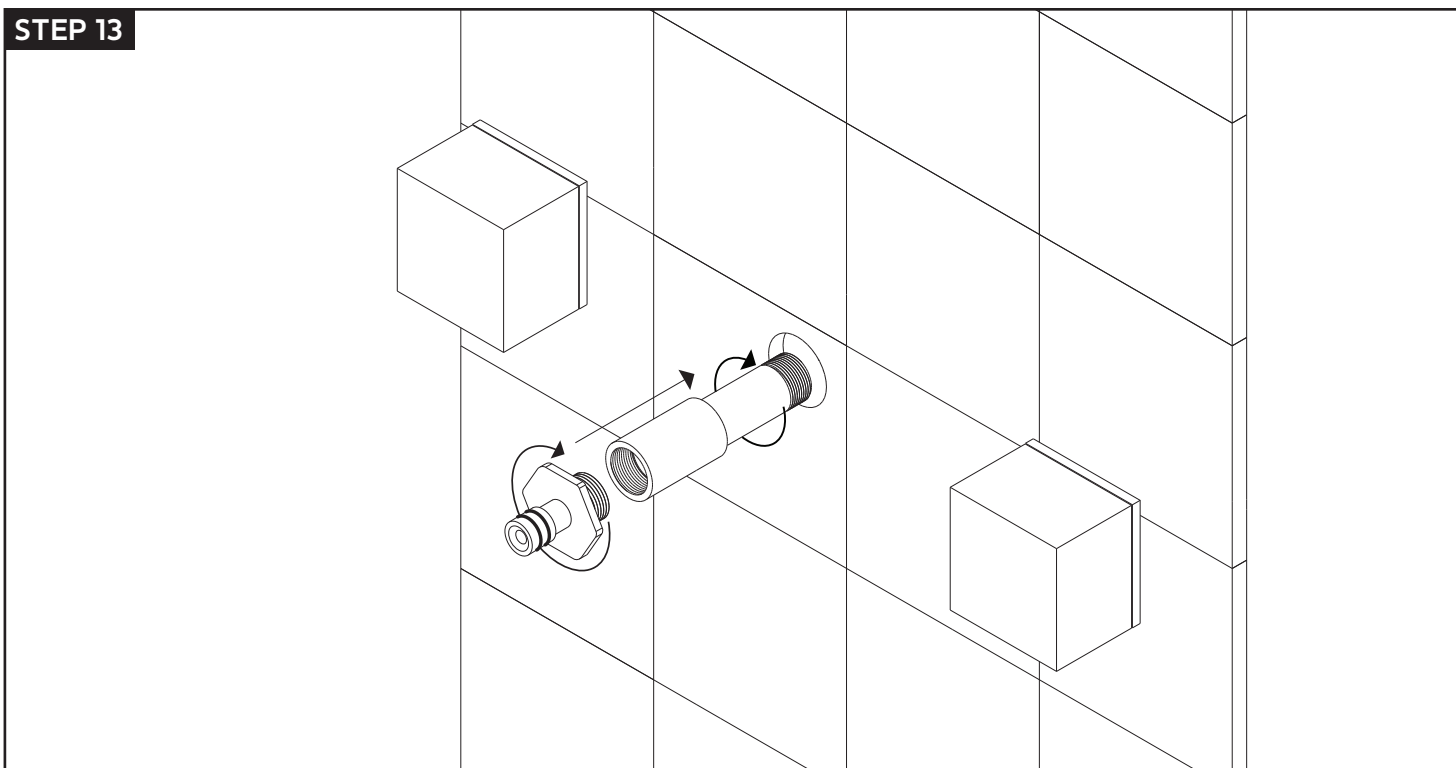


INSTALLATION STEPS

STEP 14

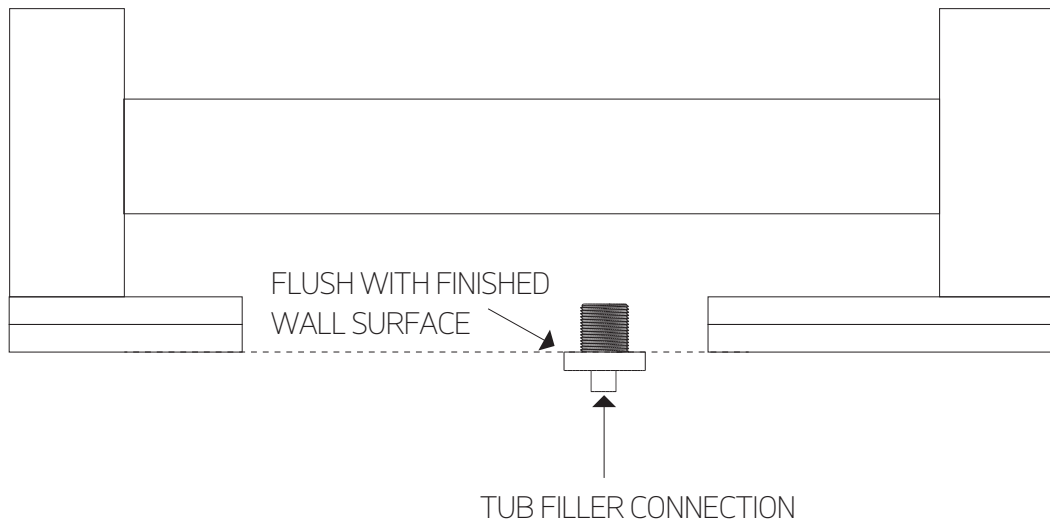


STEP 15

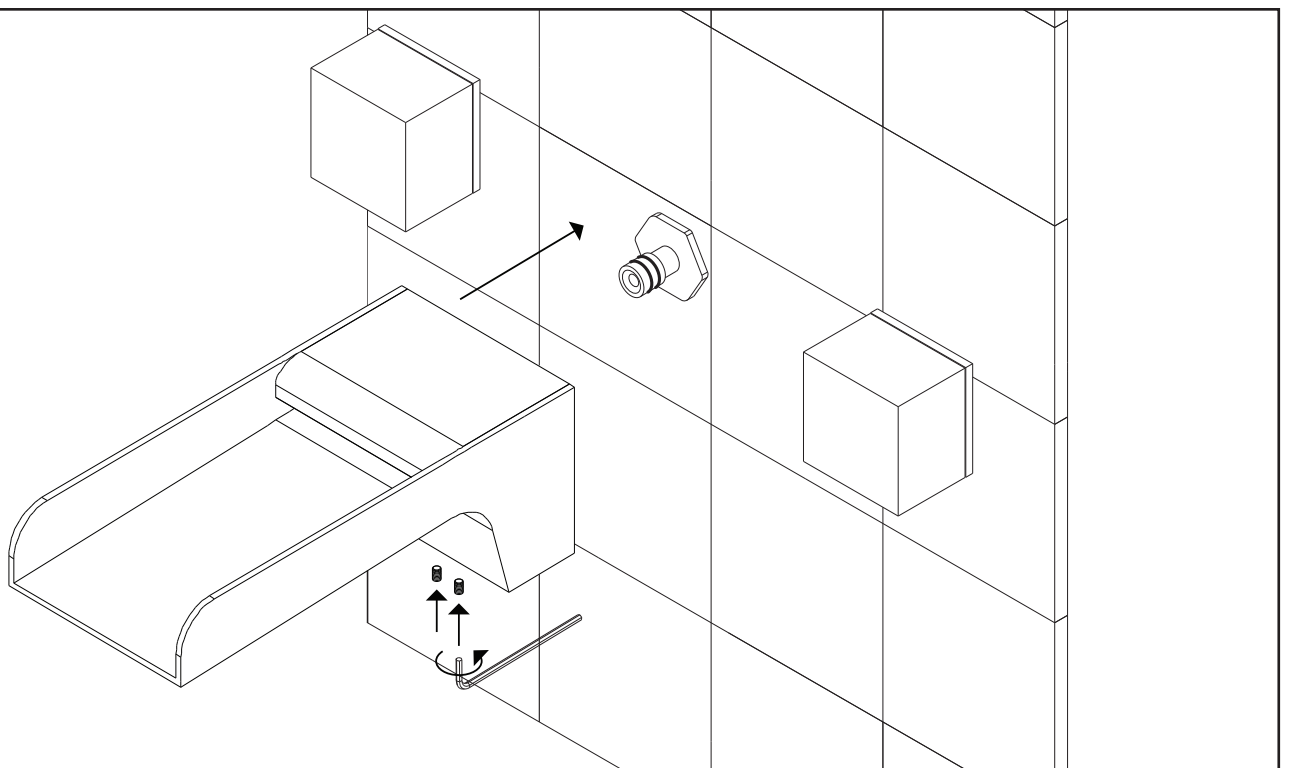

artos[®]


F802-6

kascade 3-hole wall
mount tub filler

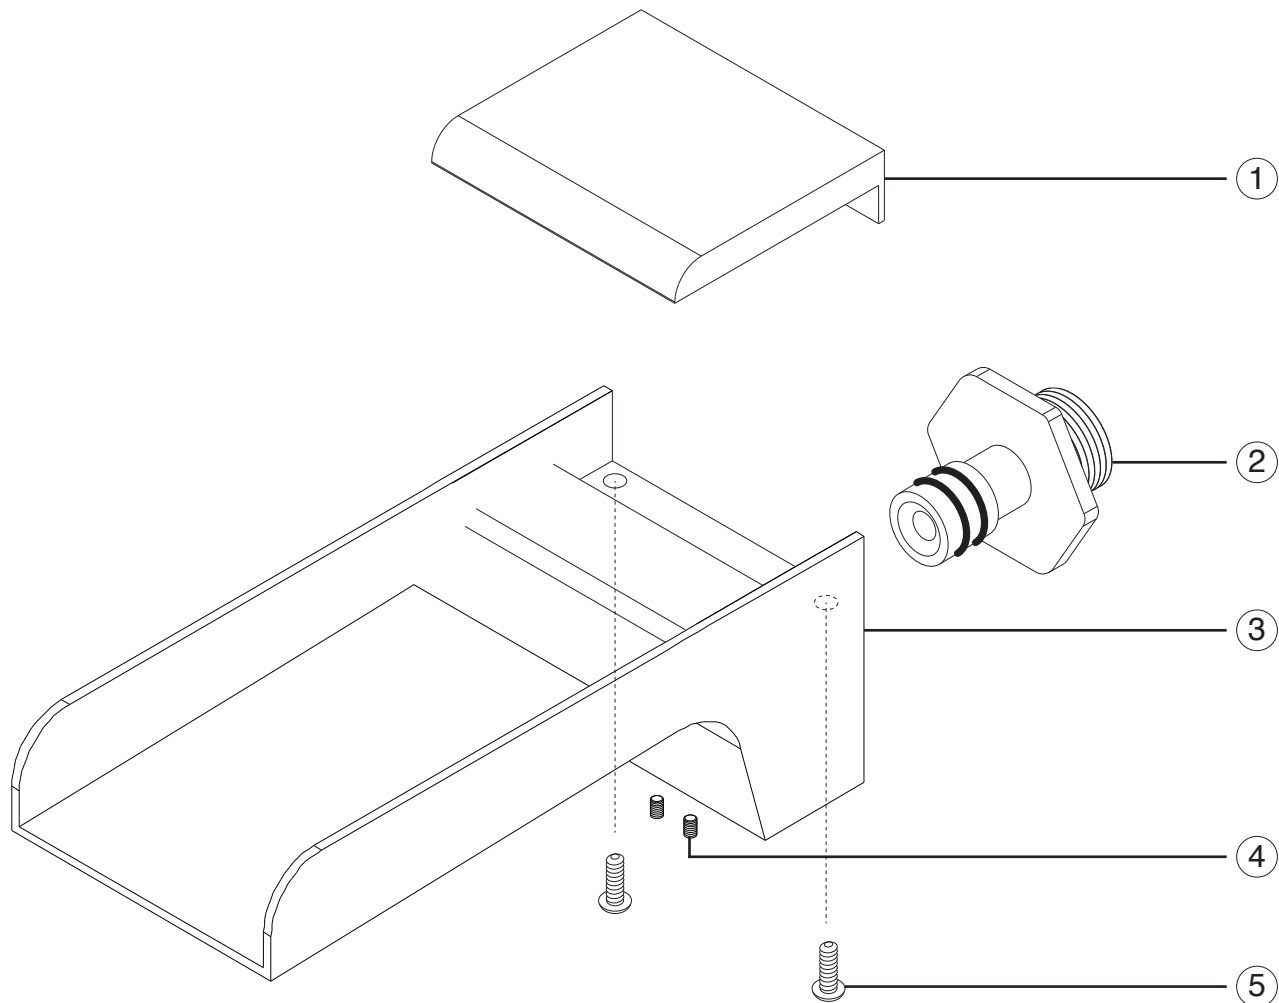

- ① BODY COVER
- ② FEMALE CONNECTION
- ③ BODY
- ④ SET SCREWS
- ⑤ COVER SCREWS

PARTS BREAKDOWN

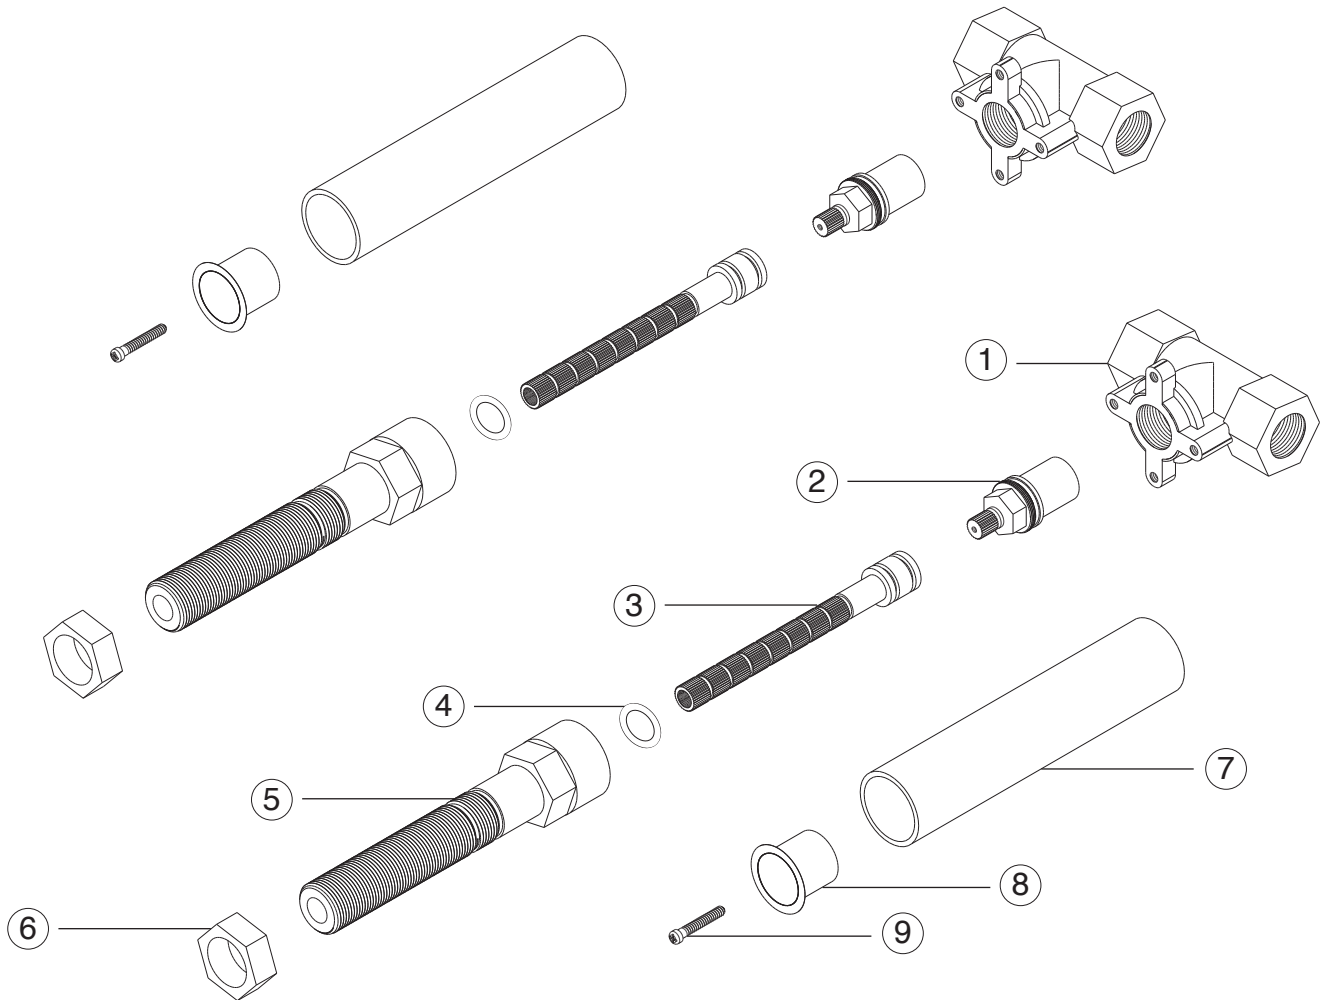

- ① VALVE BODY(2)
- ② CARTRIDGE (2)
- ③ HANDLE STEM (2)
- ④ STEM WASHER (2)
- ⑤ ESCUTCHEON STEM (2)
- ⑥ PLATE SECURING NUT (2)
- ⑦ PLASTER GUARD (2)
- ⑧ PLASTER GUARD CAP (2)
- ⑨ PLASTER GUARD SCREW (2)