


Product Installation Instructions

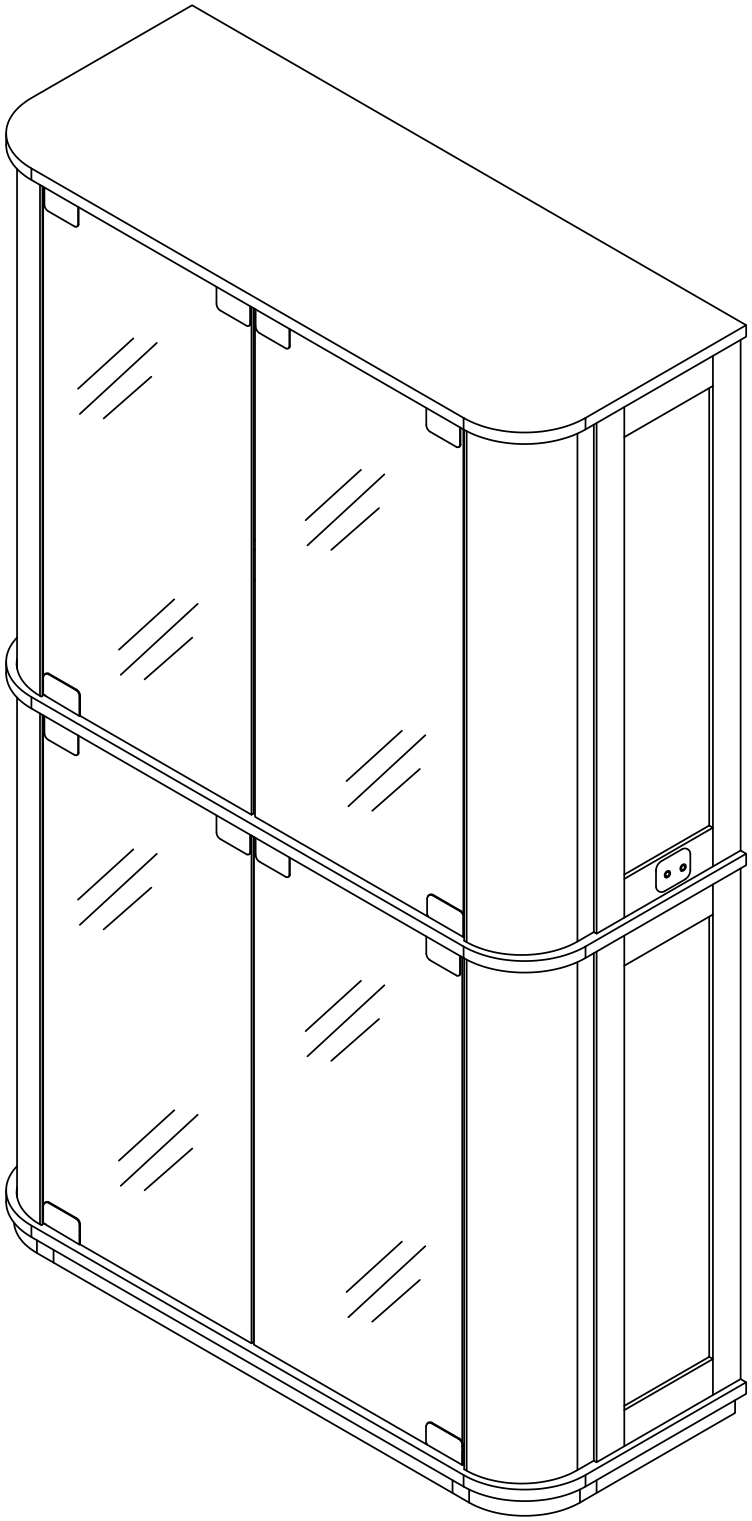



Ax1




Bx1




Cx2


Dx1

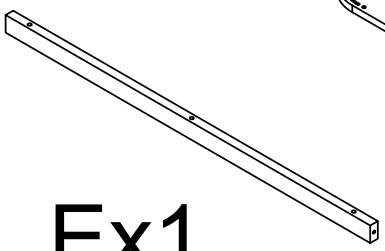


Ex1

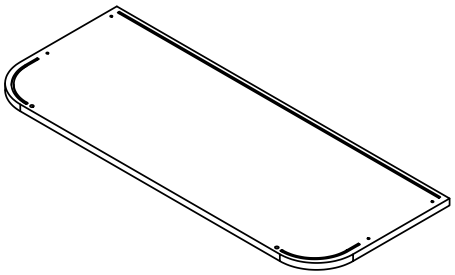


Fx1




Gx3

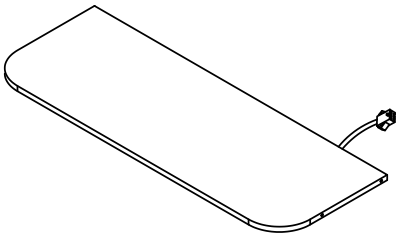


Hx2




Ix2




Jx2




Kx4

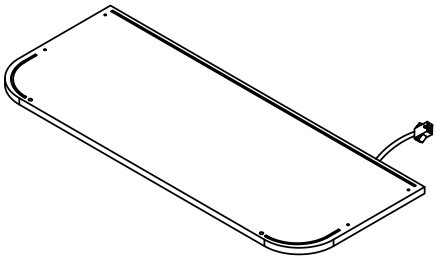


Lx1

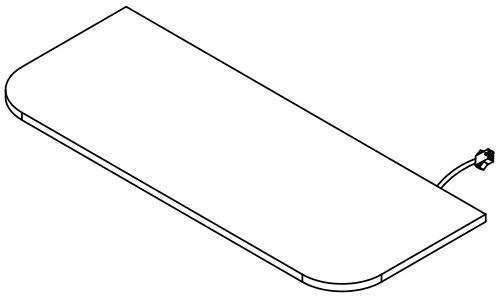

Mx1









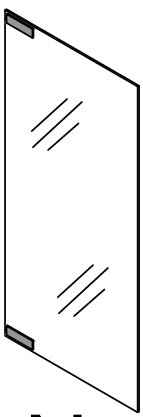


Nx4

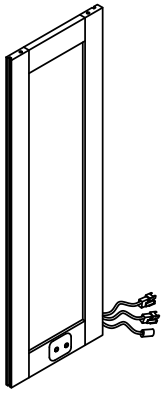


Ox1

1


①		Two in one screw (6x28mm)	40pcs +4pcs
②		Two in one nut (10x12mm)	40pcs +4pcs
③		Non-slip pads (50x10x2mm)	10pcs +2pcs
④		Rebound device & Screw (3x16mm)	2pcs / 8pcs +2pcs
		Iron sheet	4pcs
		Hinge	8pcs / 4pcs / 4pcs
⑤		Double end connecting line	2pcs
⑥		Wire clamp	3pcs +2pcs
⑦		Fixing clip & screw (3x16mm)	24pcs +2pcs
⑧		Foot nail	6pcs +2pcs
⑨	Anti Fall Hardware	 x2 /  (3.5x14mm) x2 /  x2 /  x2 (4x45mm) /  x4	
		AC/DC Adapter (12V⎓3.0A)	1pcs

Double-head screwdriver, use as required

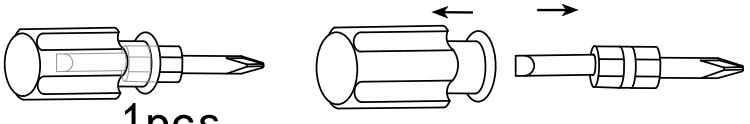


1pcs

Product structure decomposition

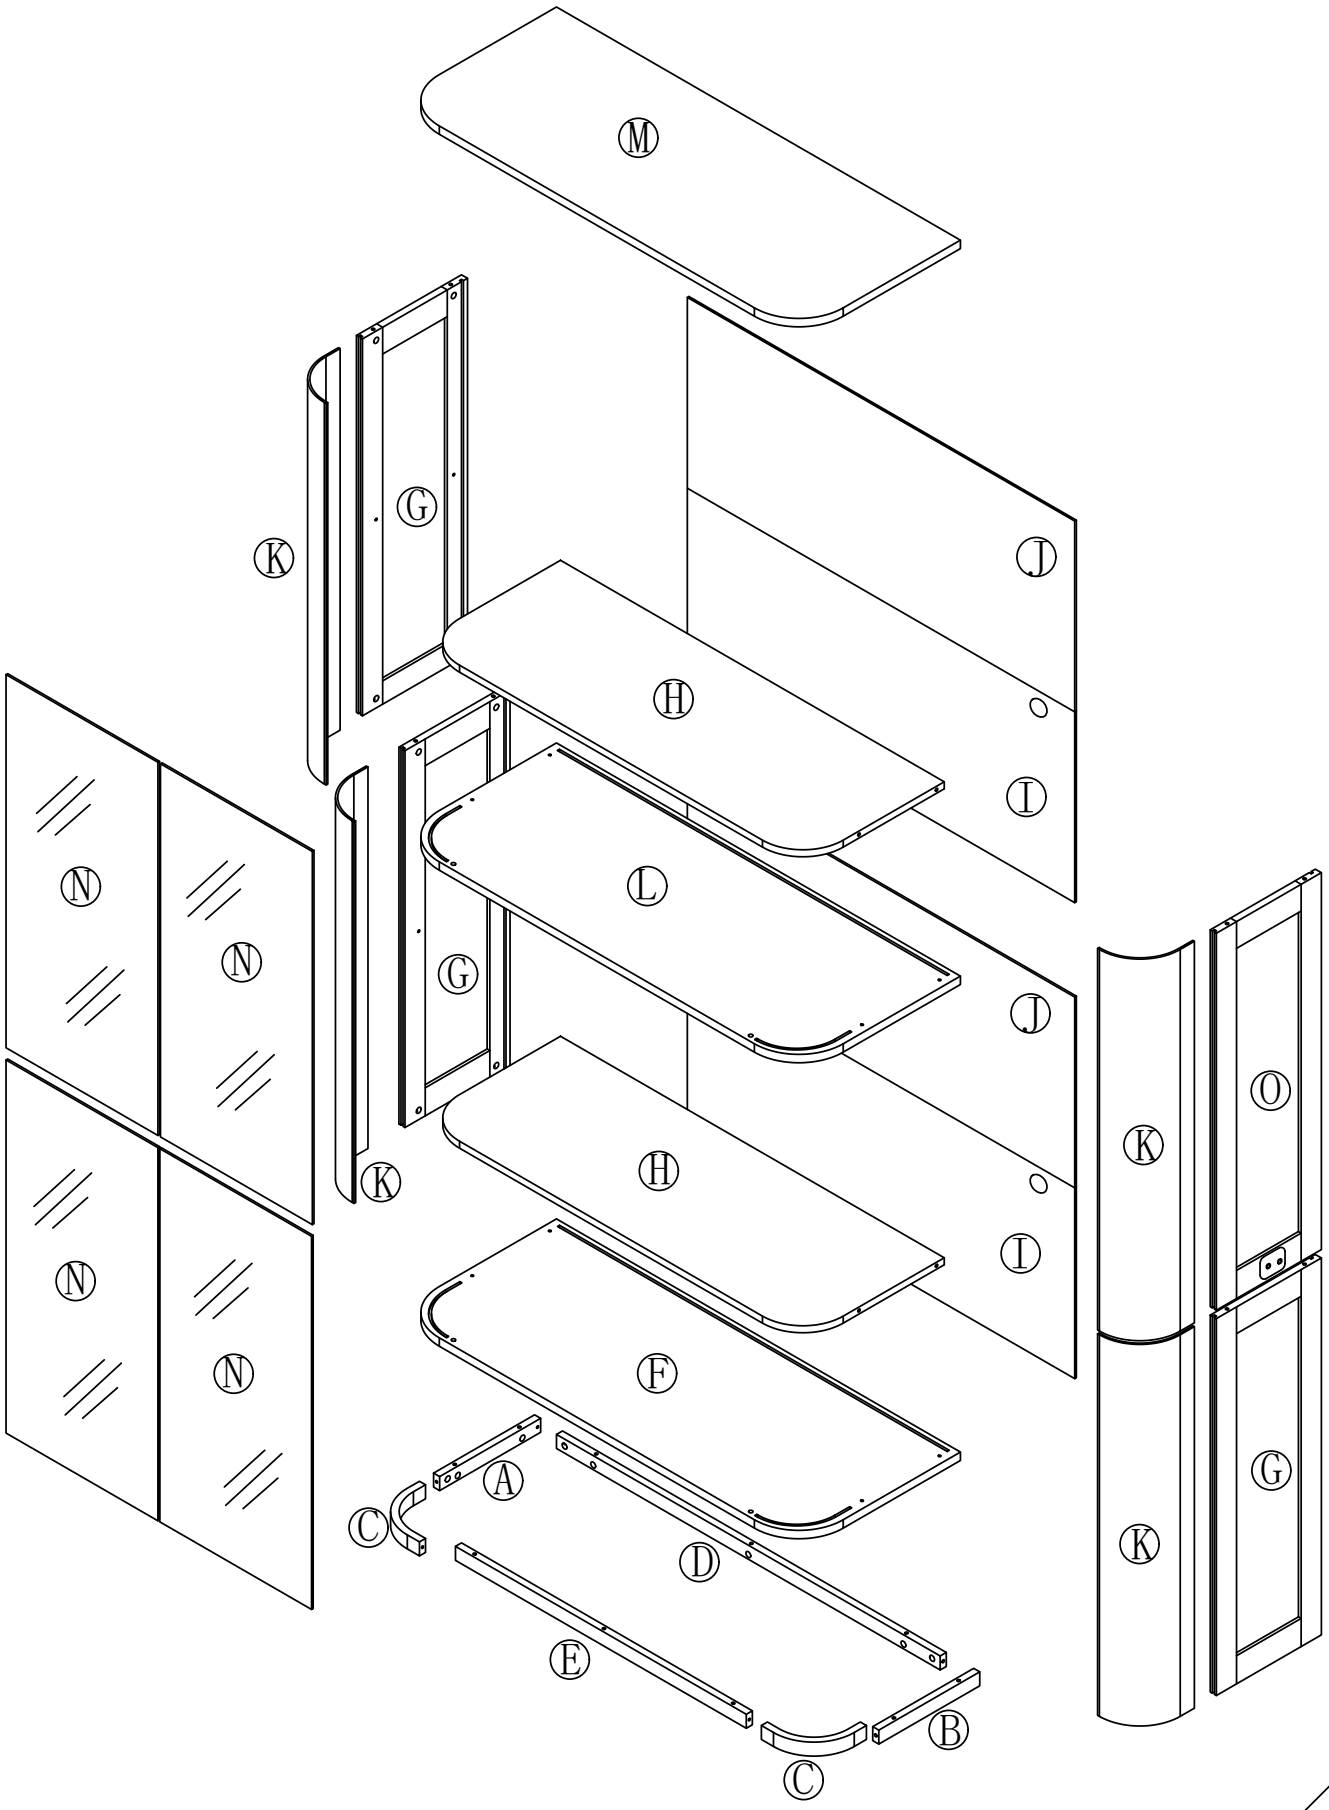


Use parts ① and ②


Step1

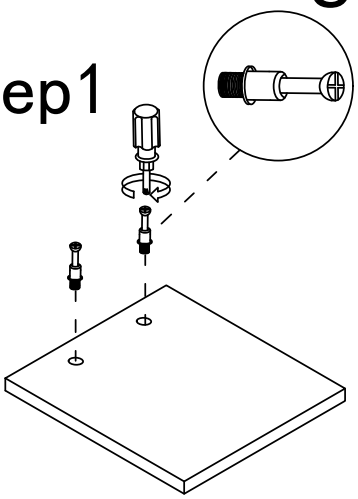


Step2

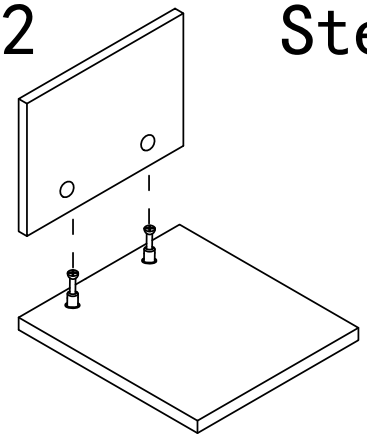


Step3

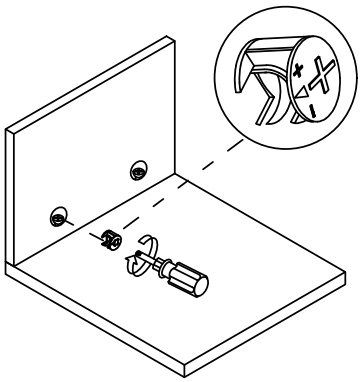

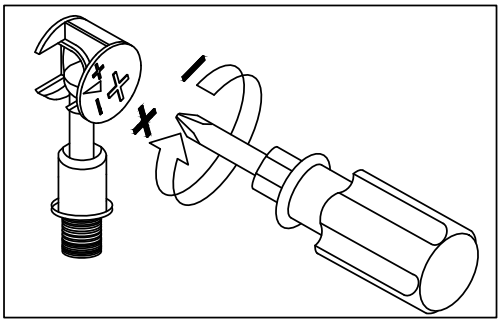



Use a screwdriver to lock in the direction of the "+" sign

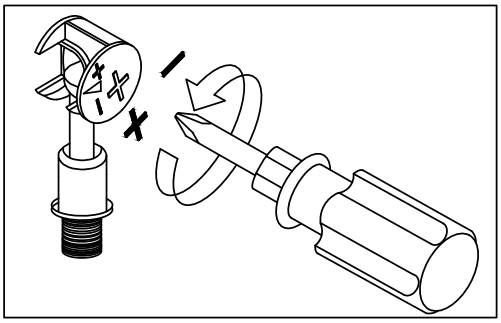


Disassemble along the direction of "-" sign


Step 1




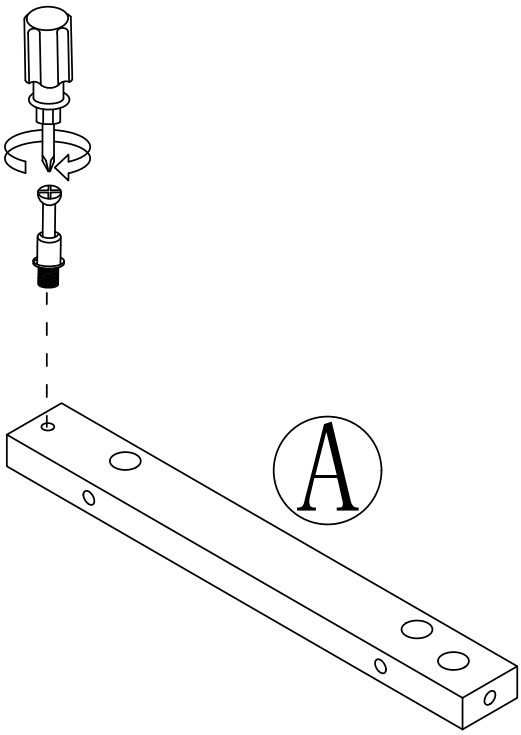

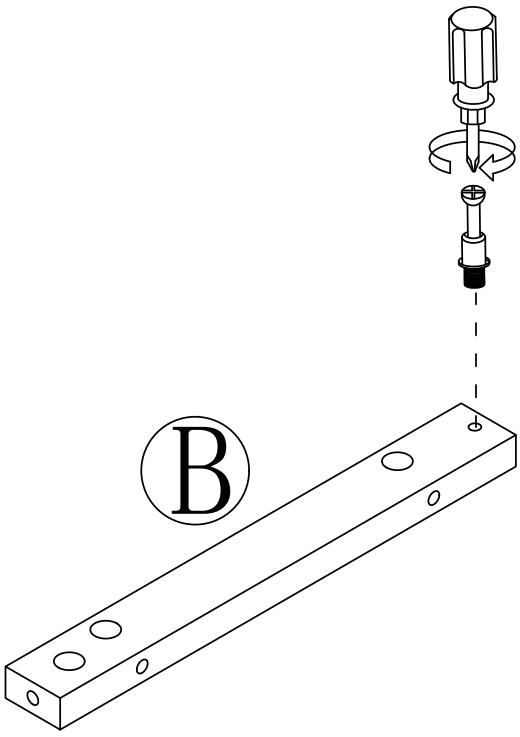



Step 2



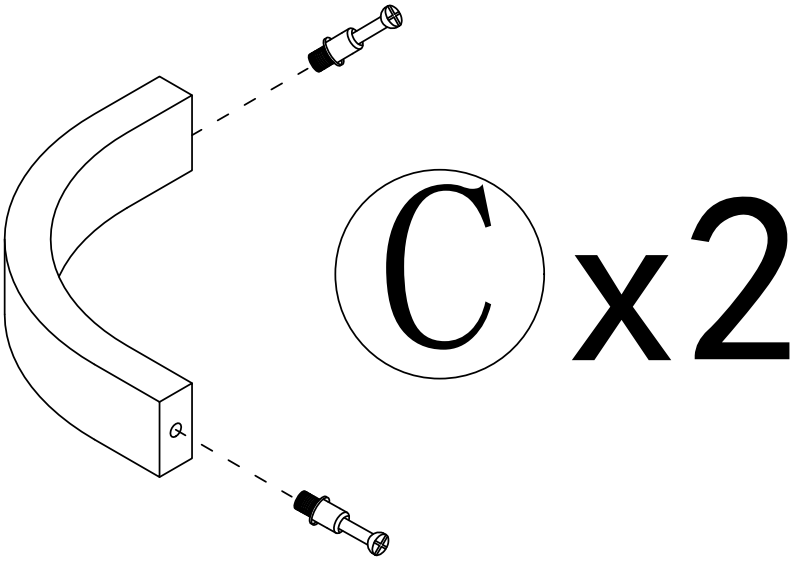


Step 3



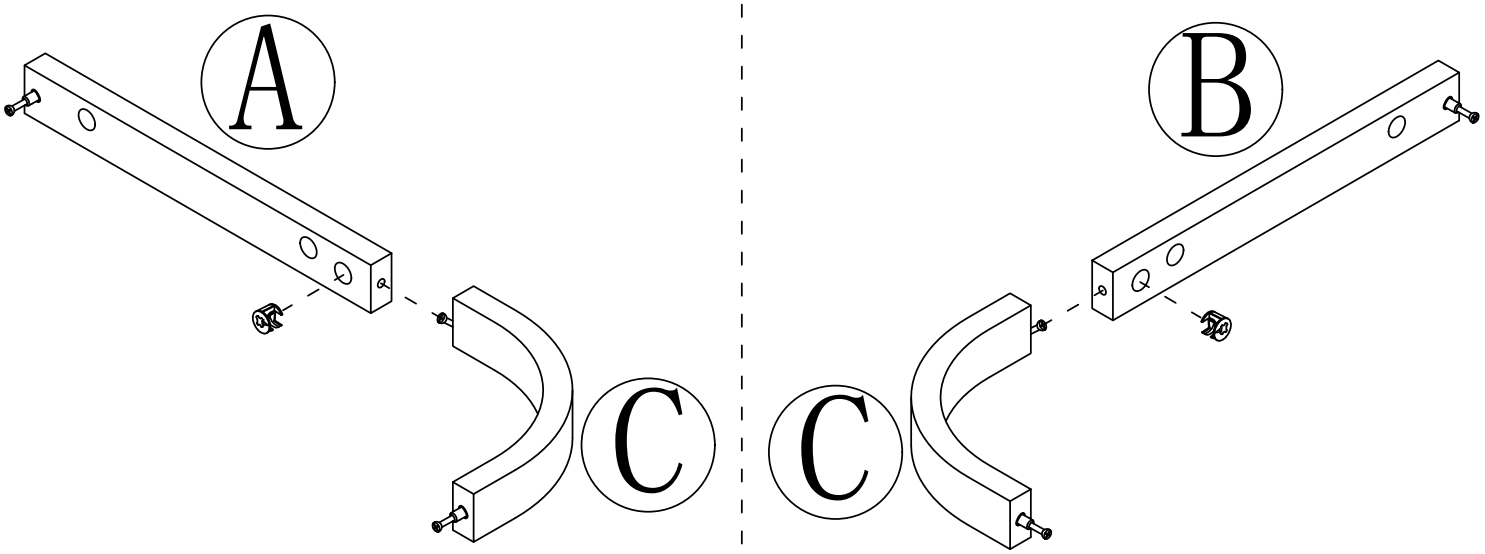


Step 4

2 x2

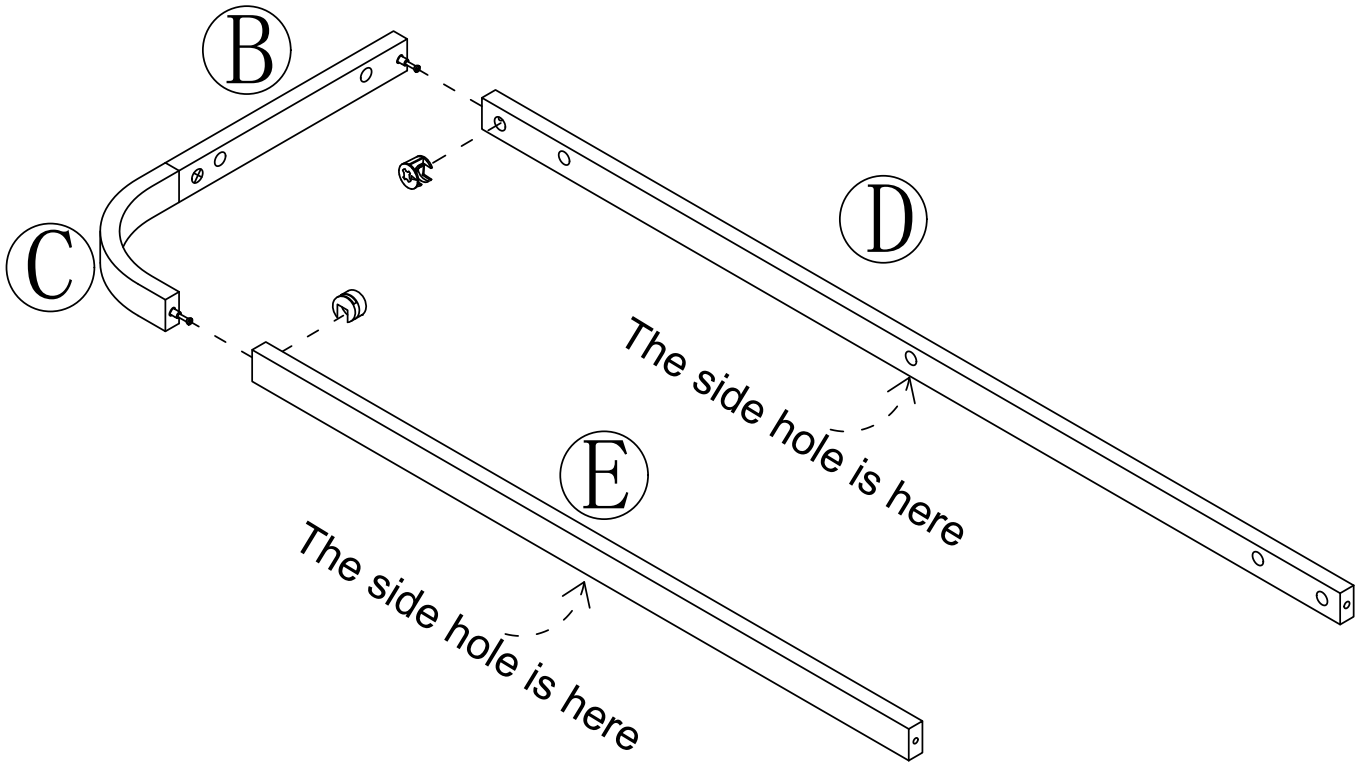



Step 5

2 x2

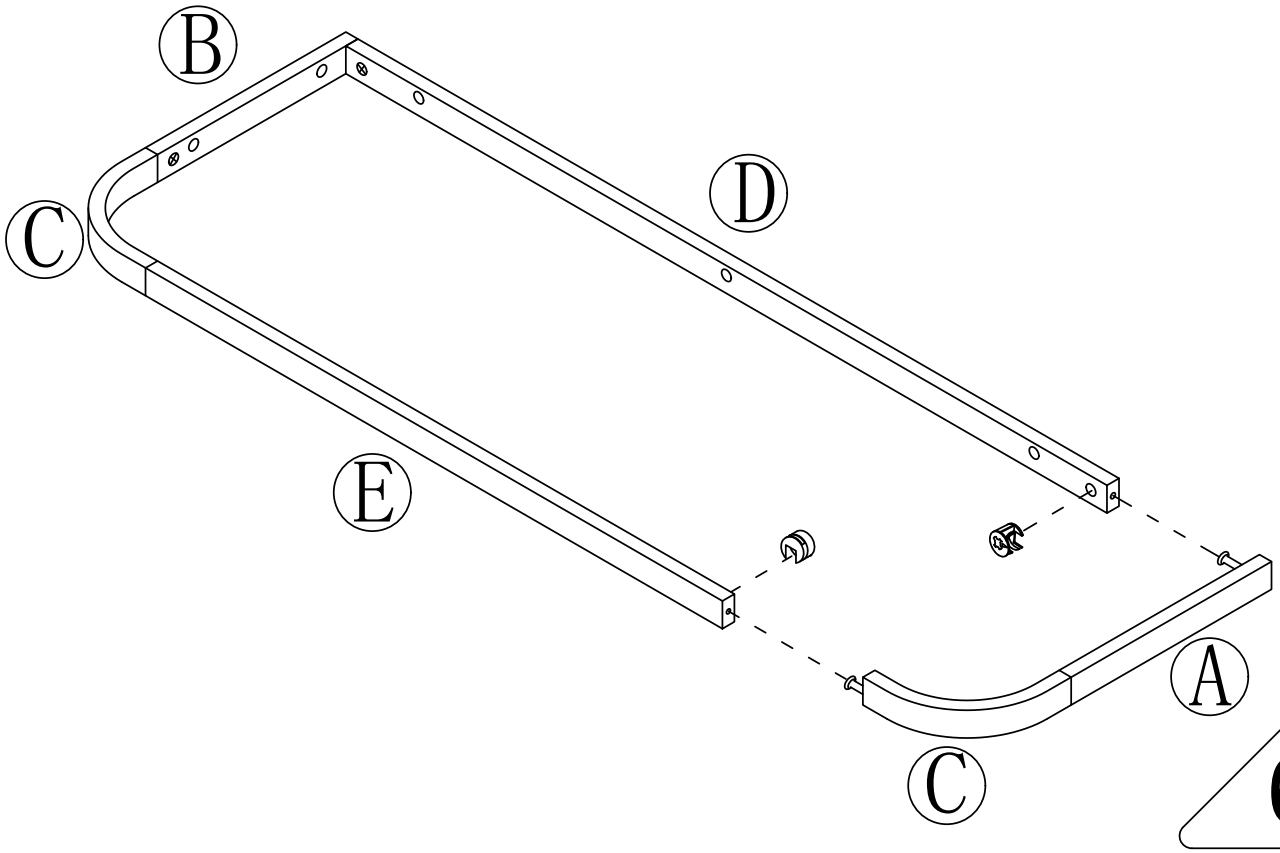



Step 6



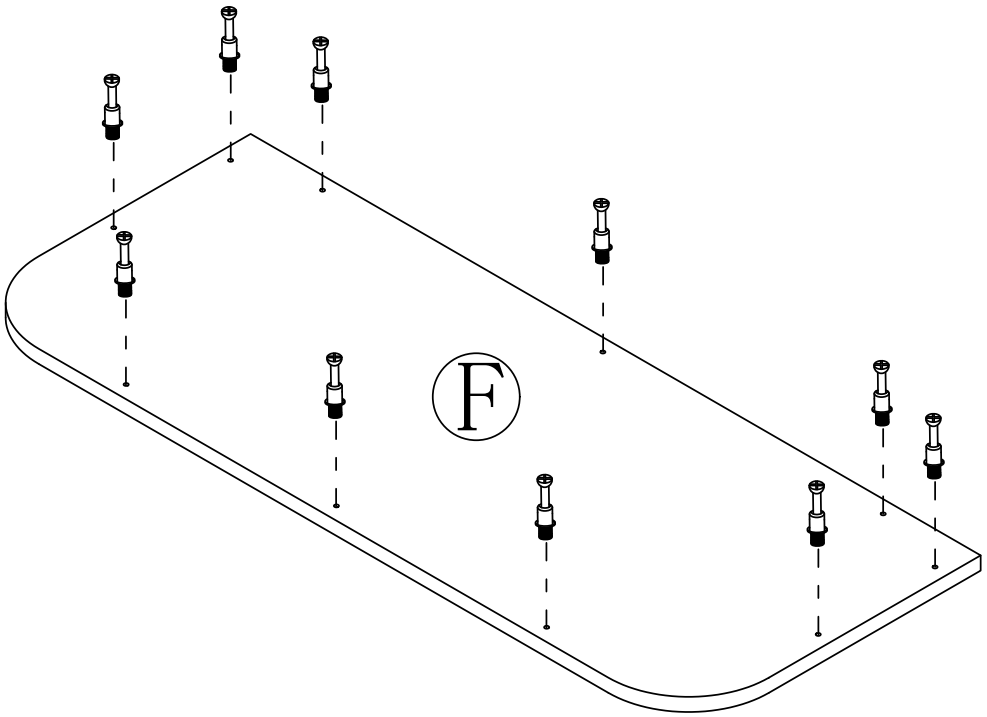

Step 7




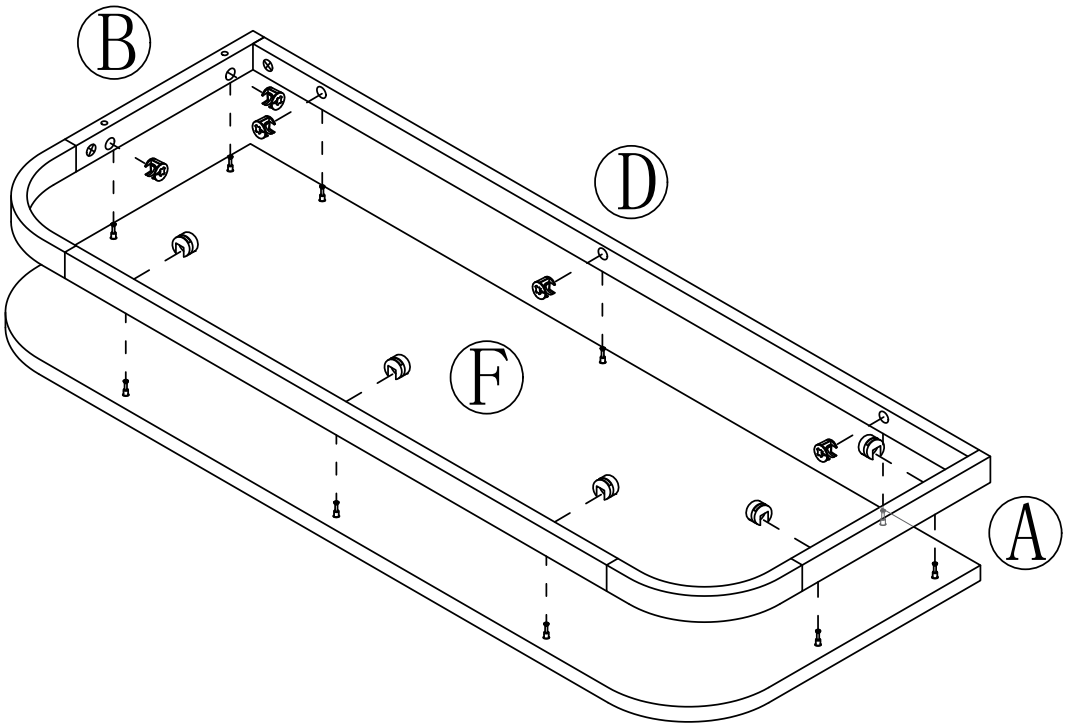

Step 8


3 x10

Tear off release paper and stick the black foot pad on the board

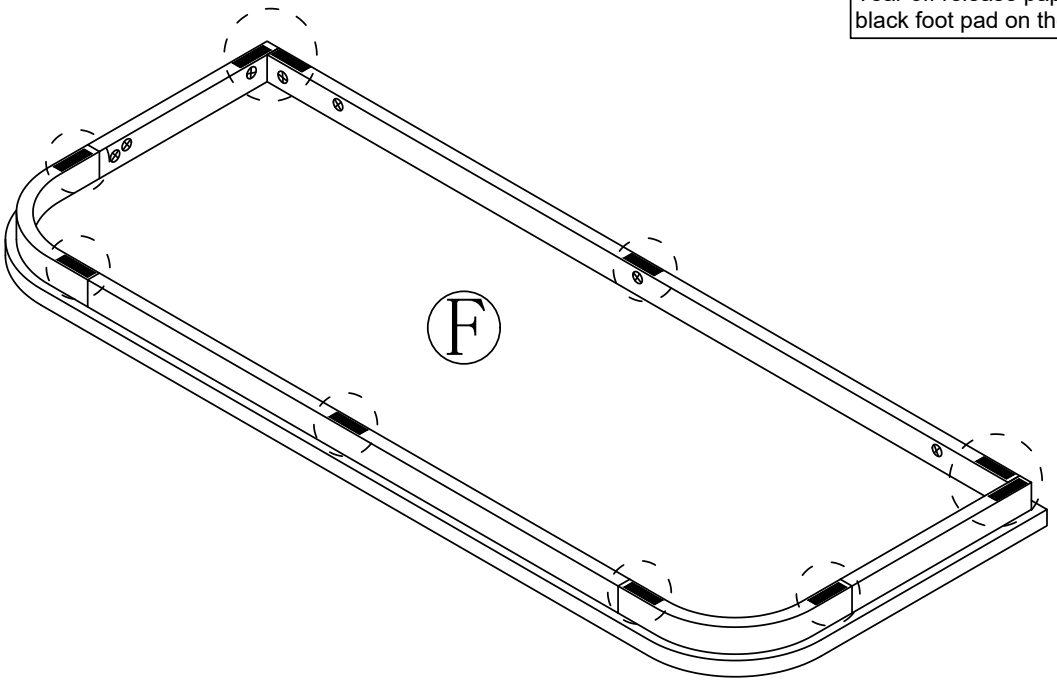


Step 9


1 x4

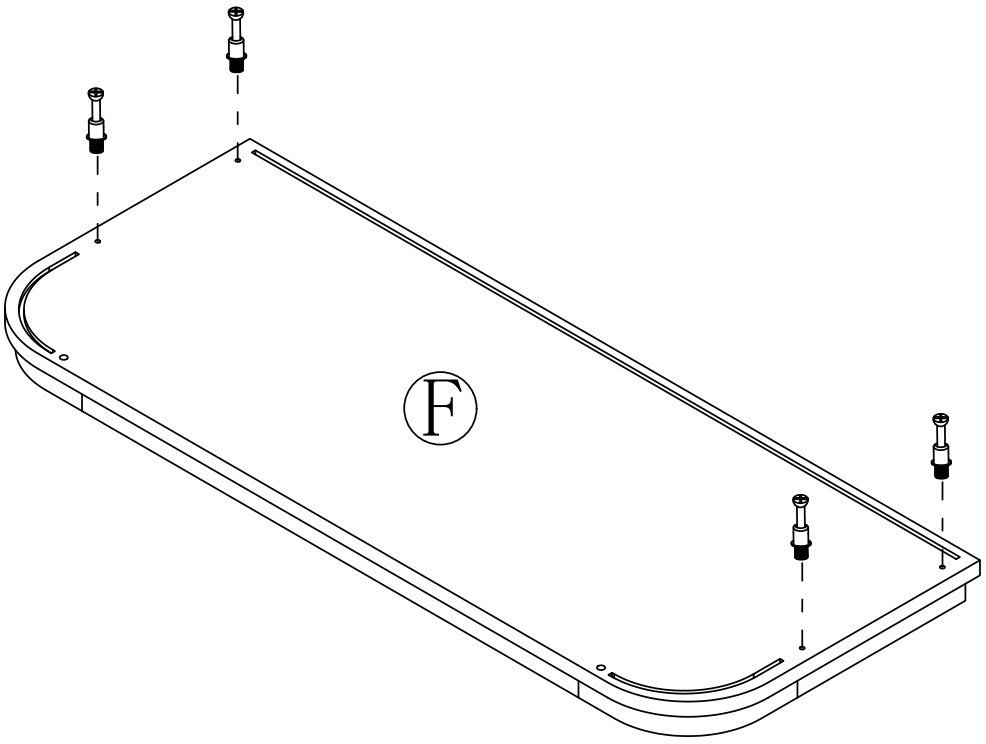


Step 10

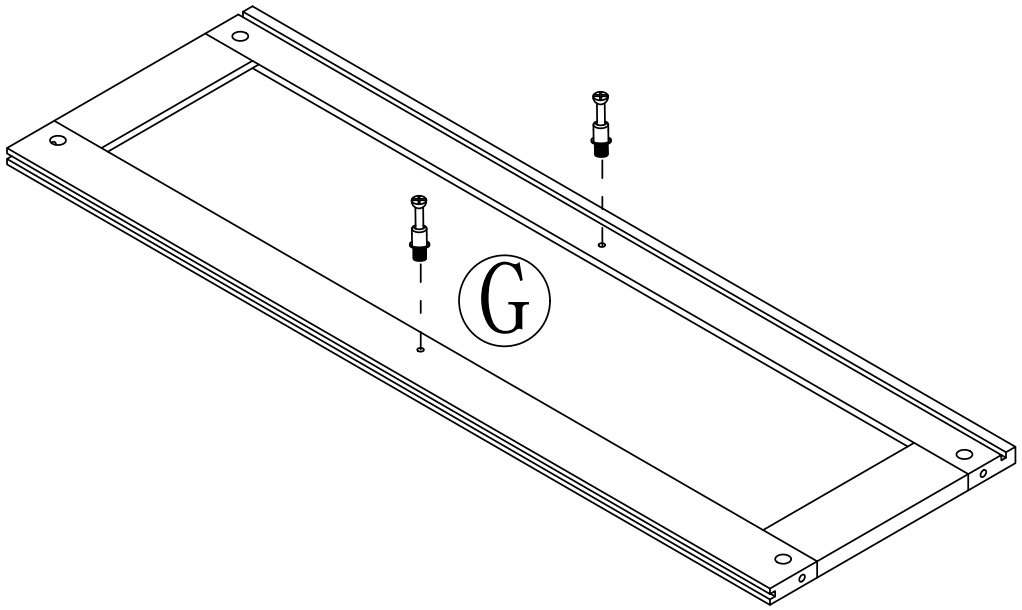


x3




Step 11

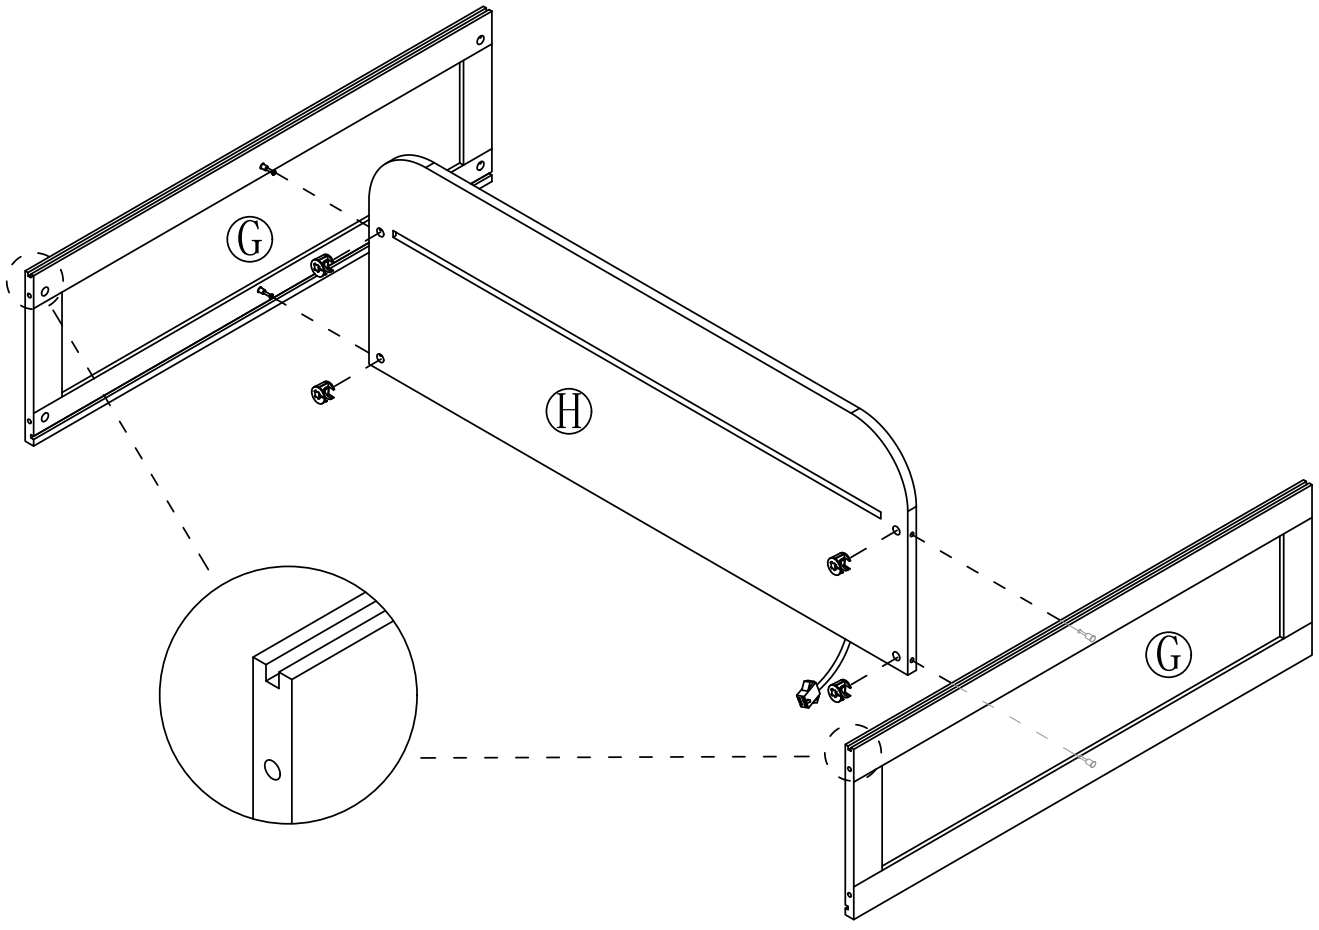




Step 12


2 x4

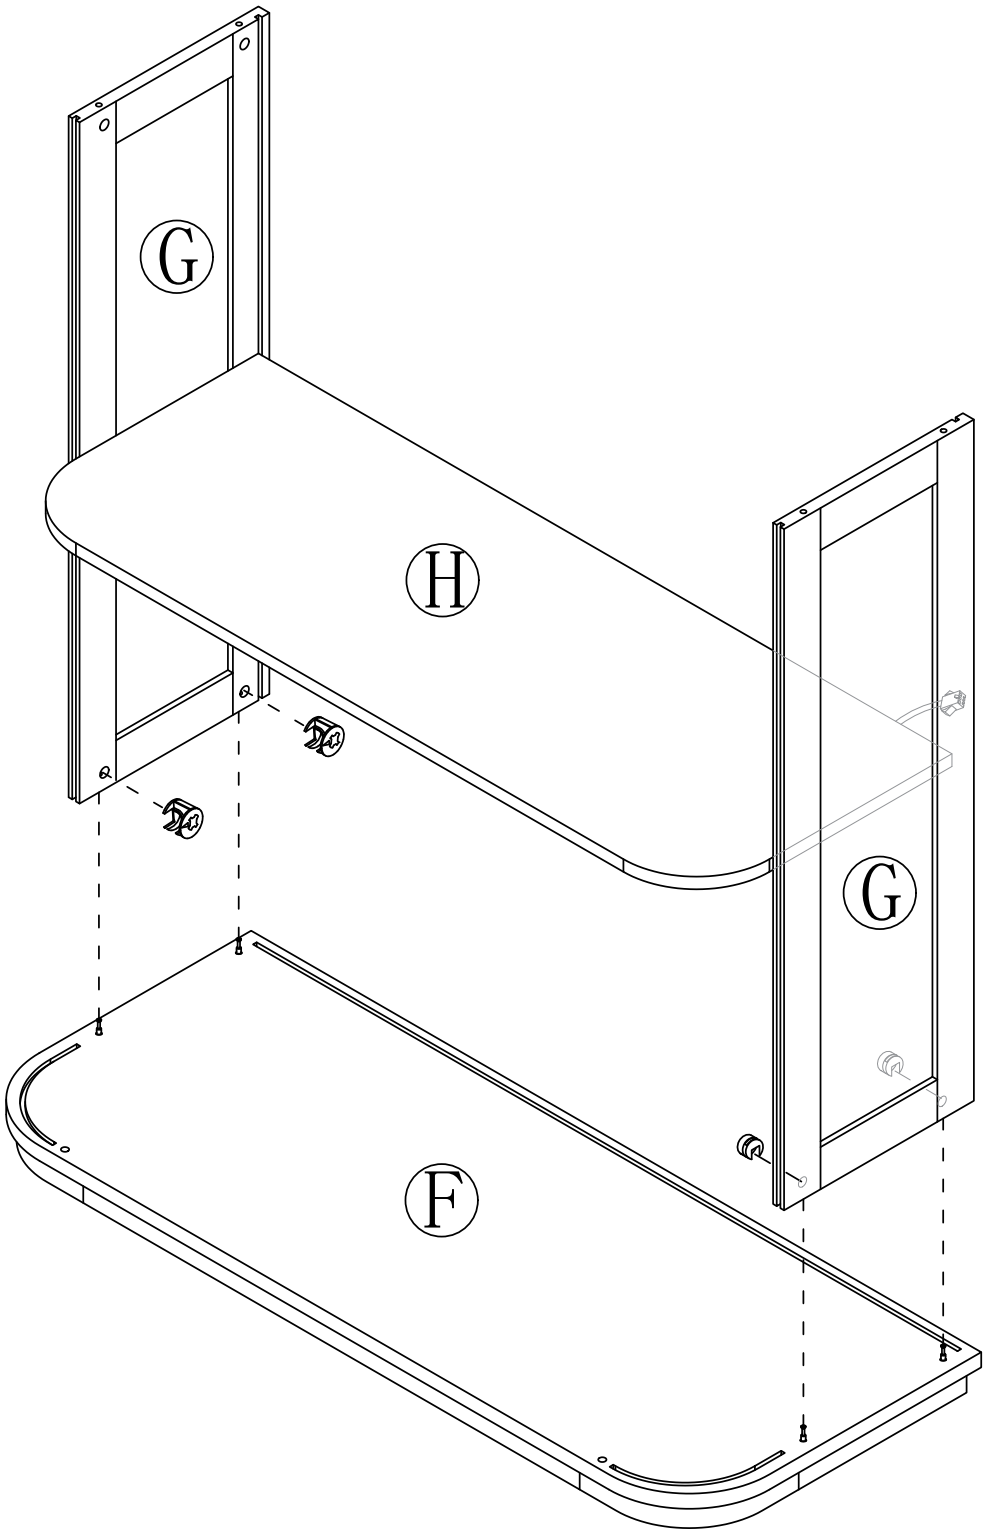


Step 13

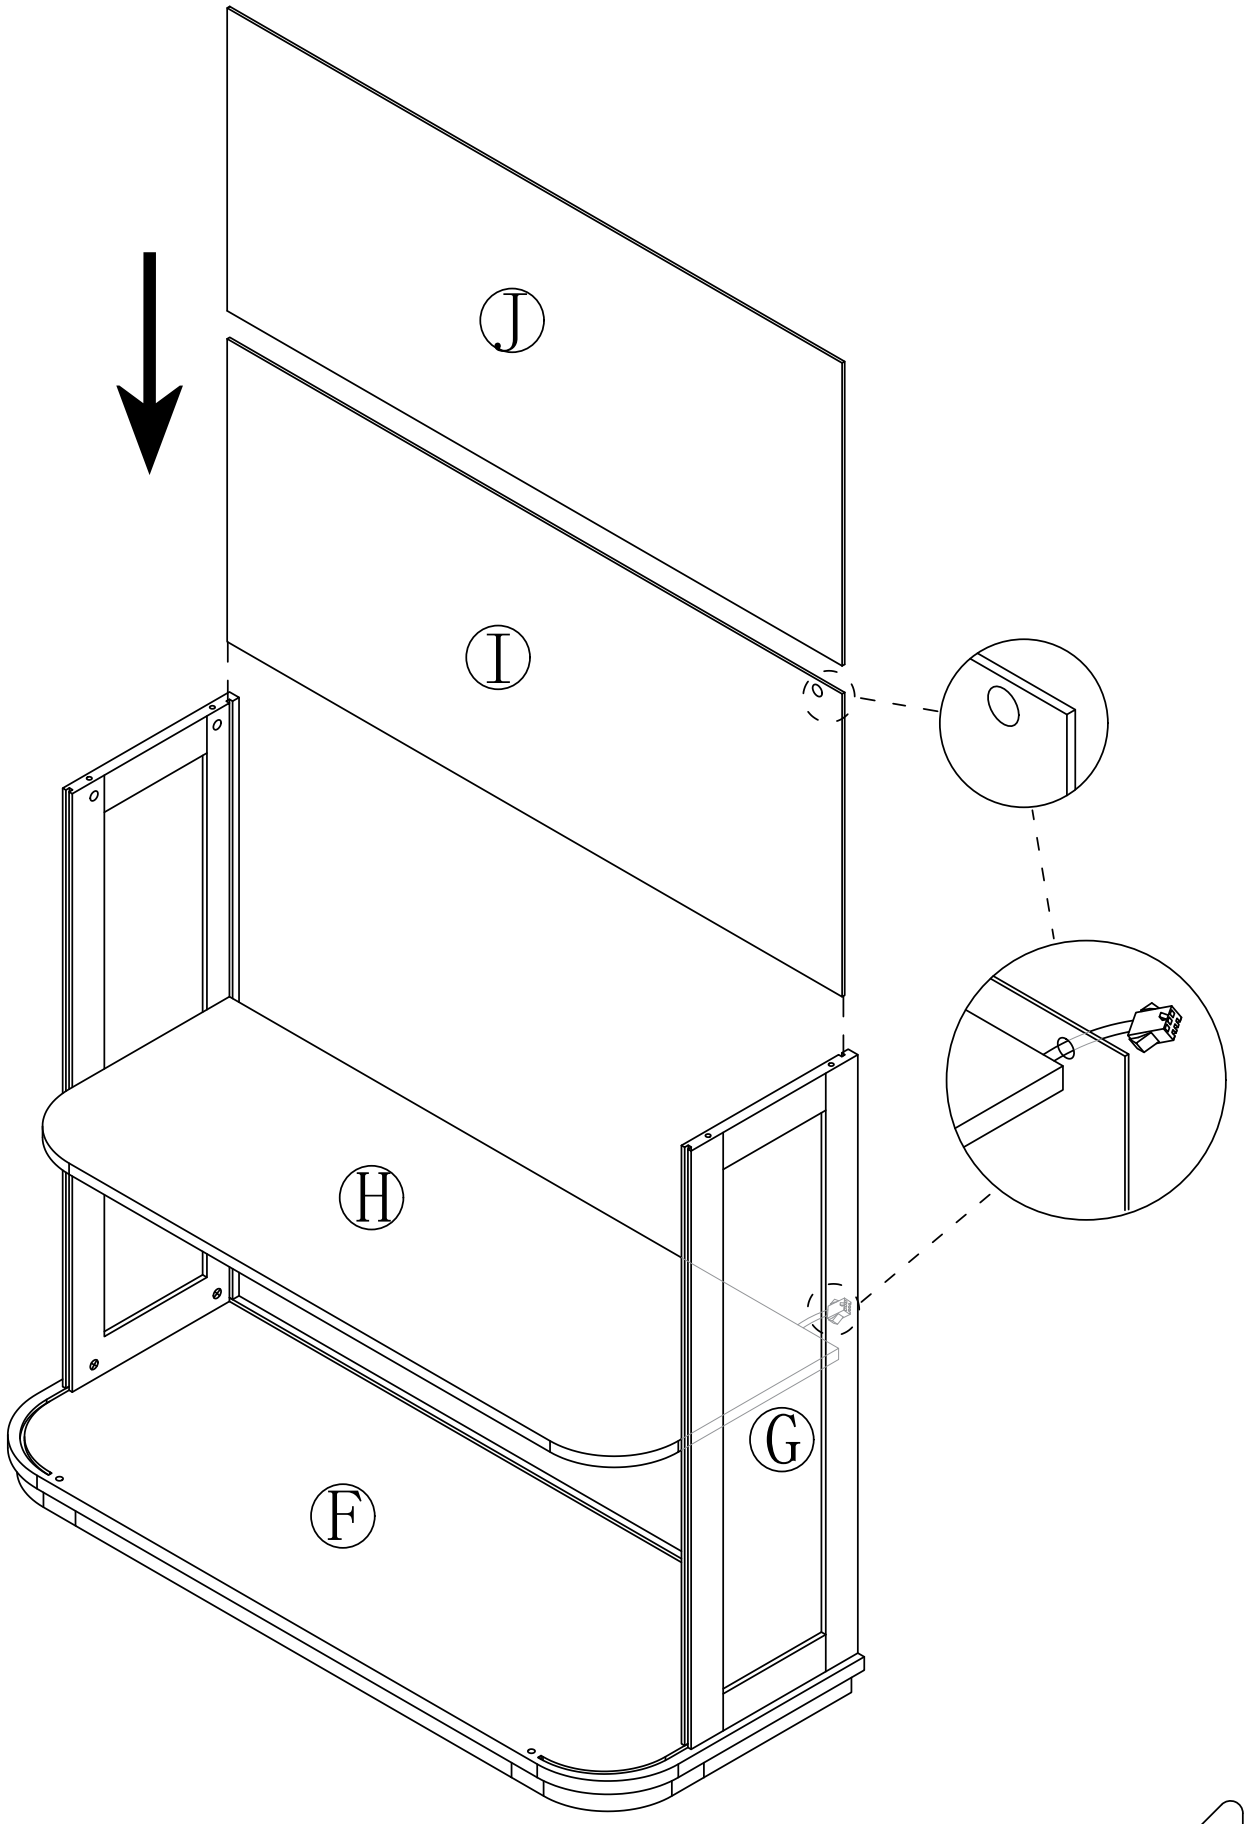


Step 14

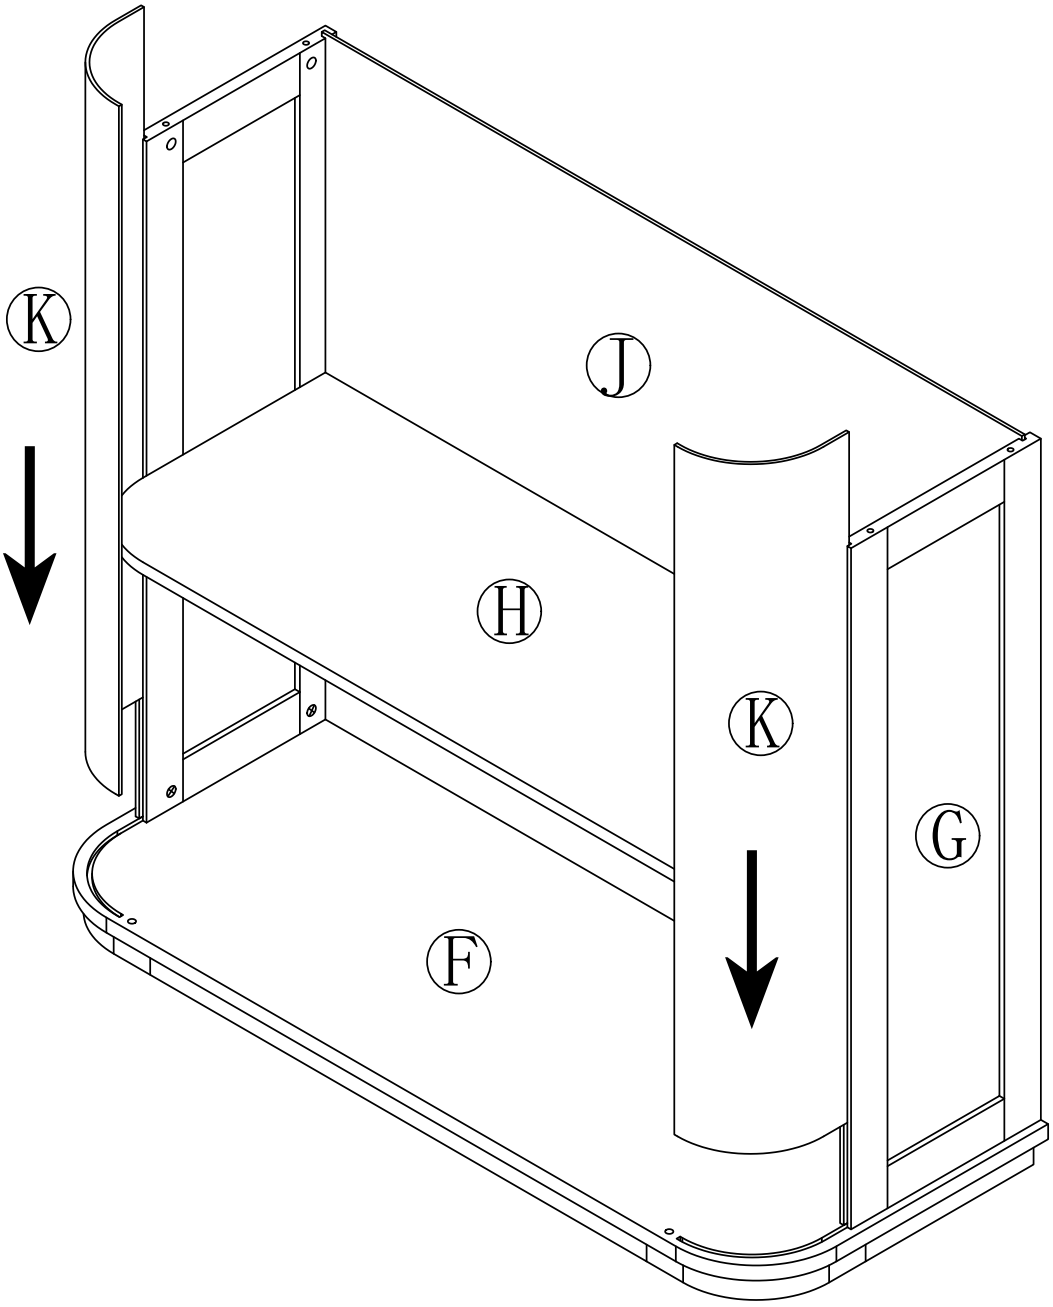



Step 15



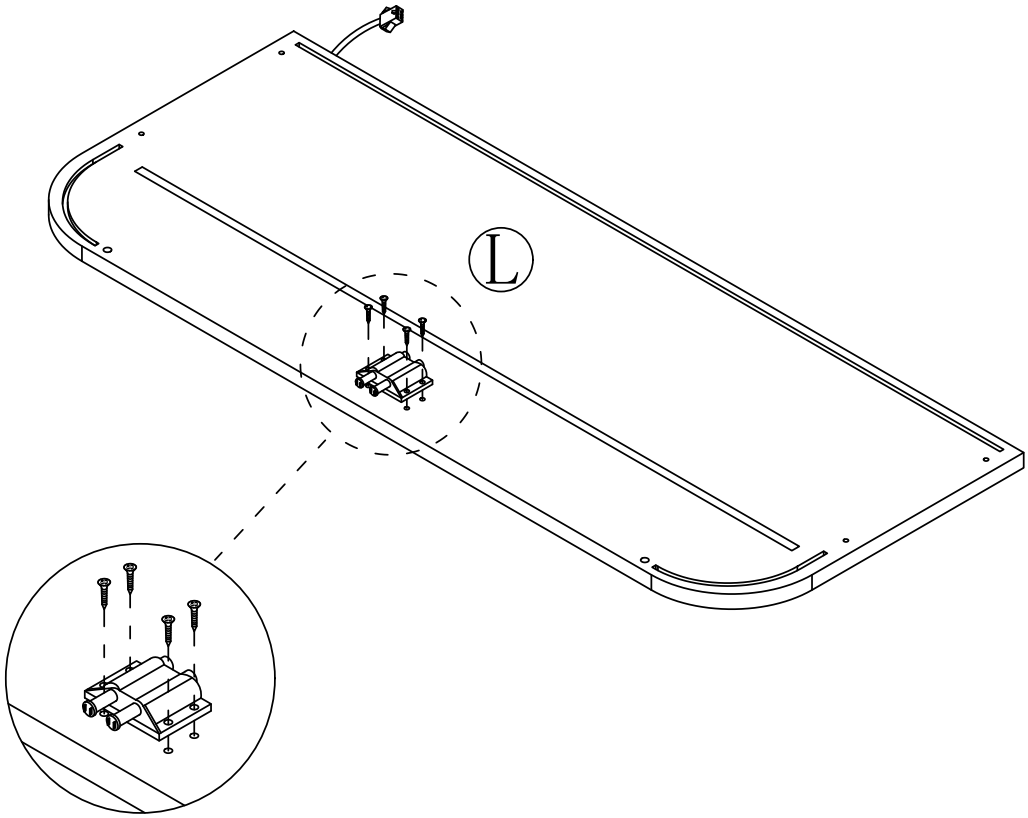


Step 16



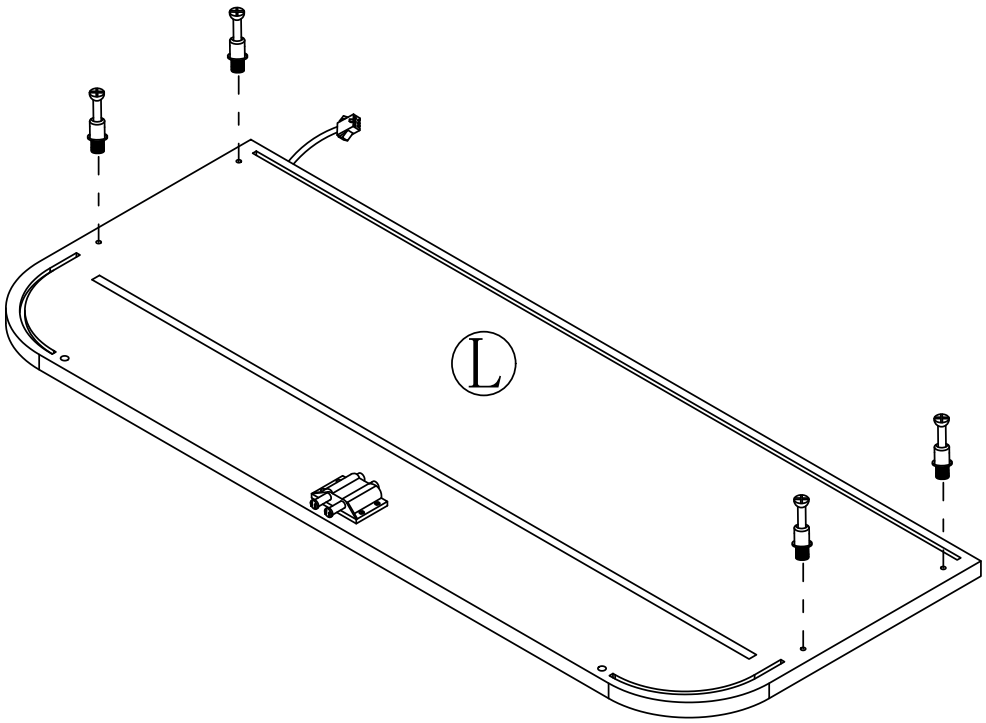



Step 17

2 x4

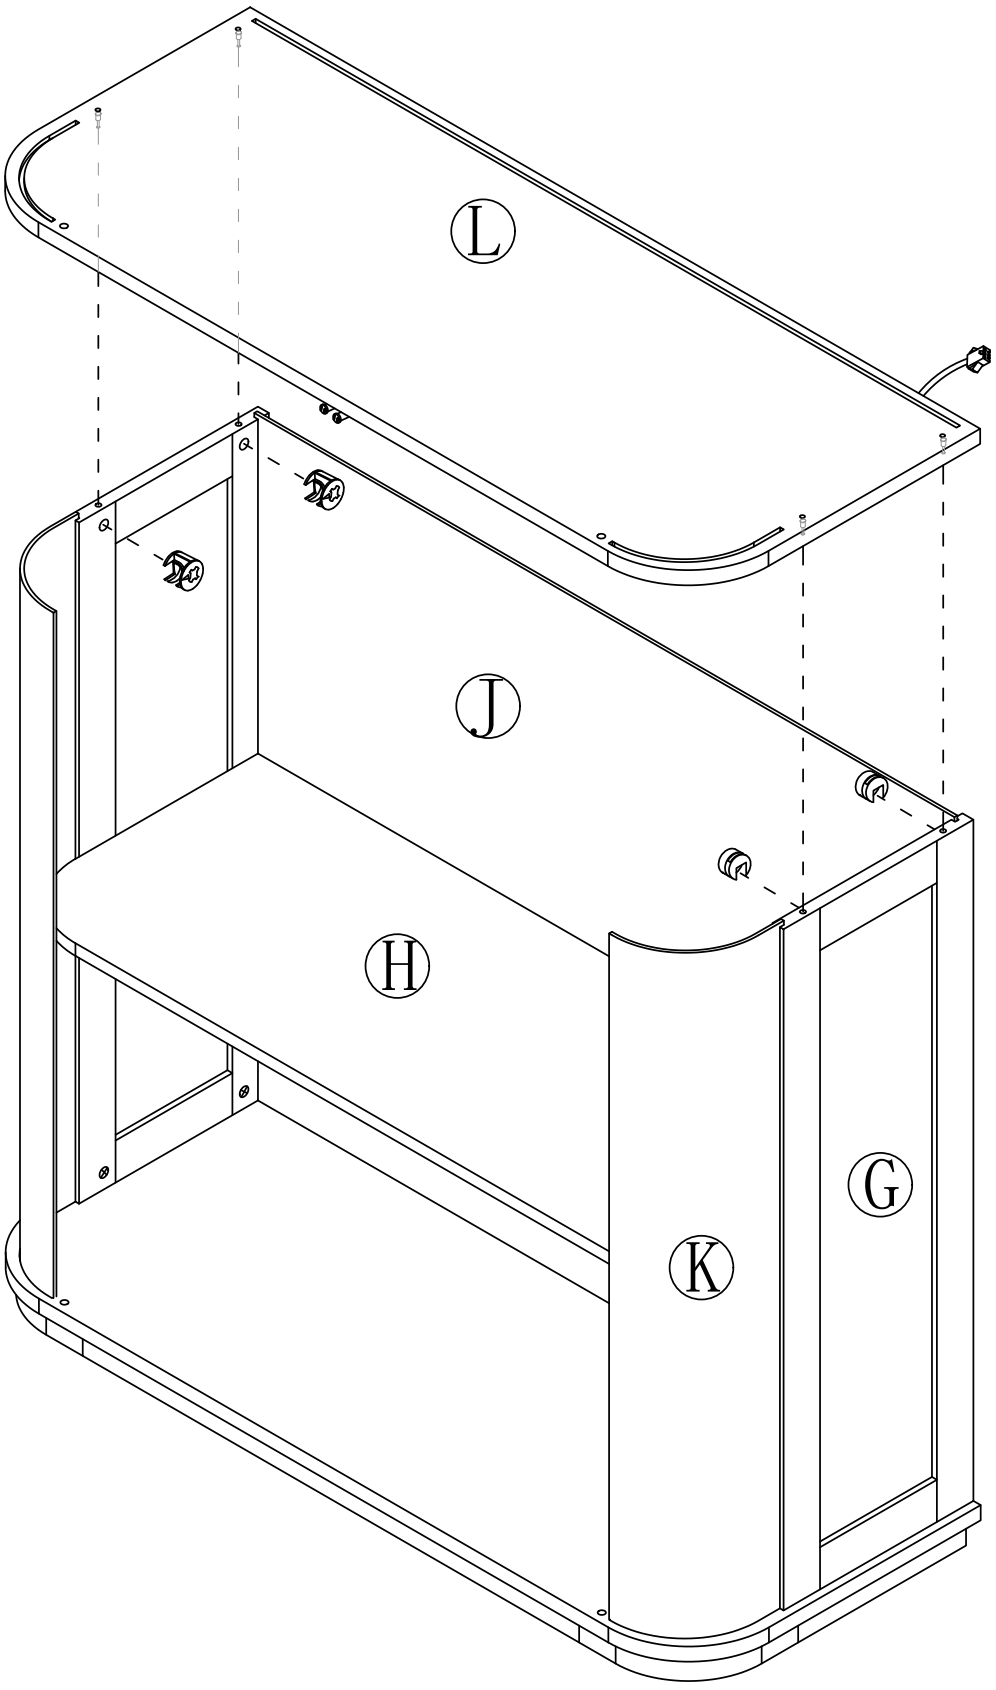



Step 18



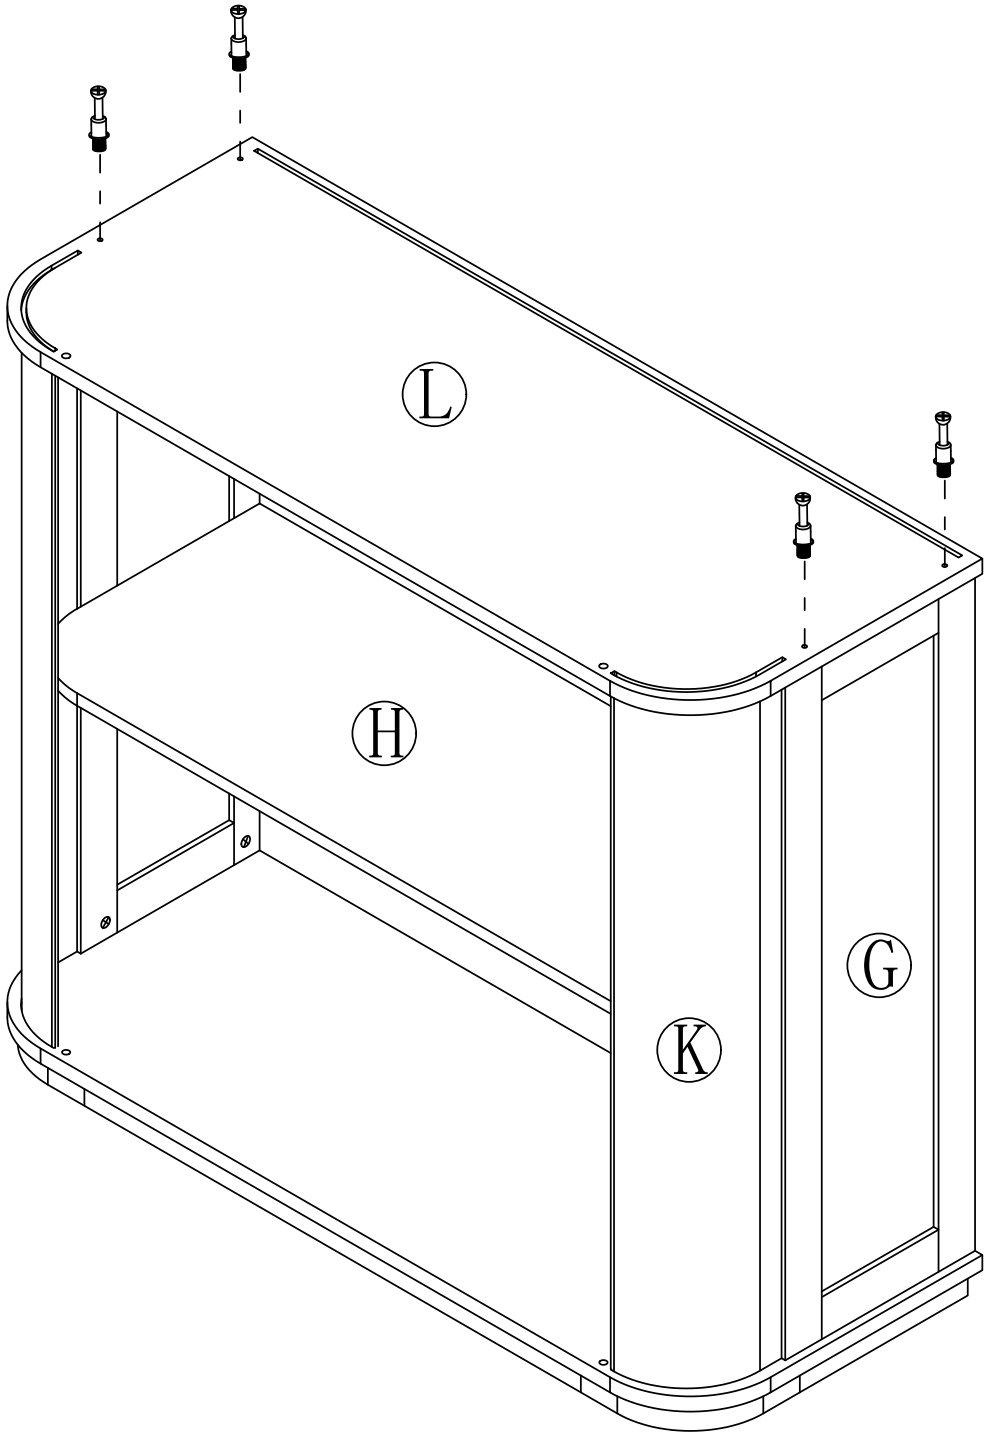



Step 19



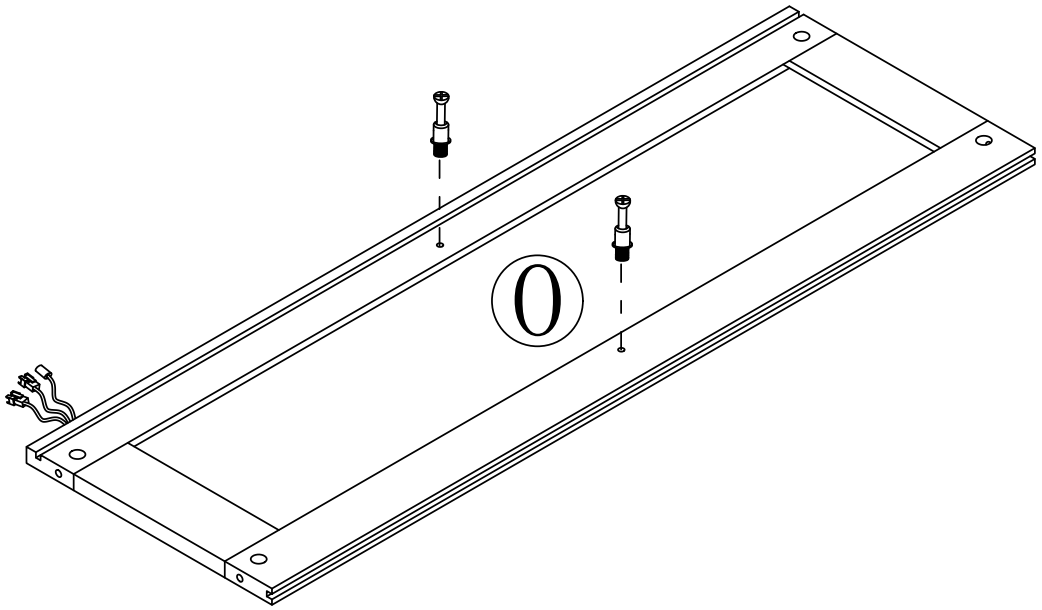


Step 20



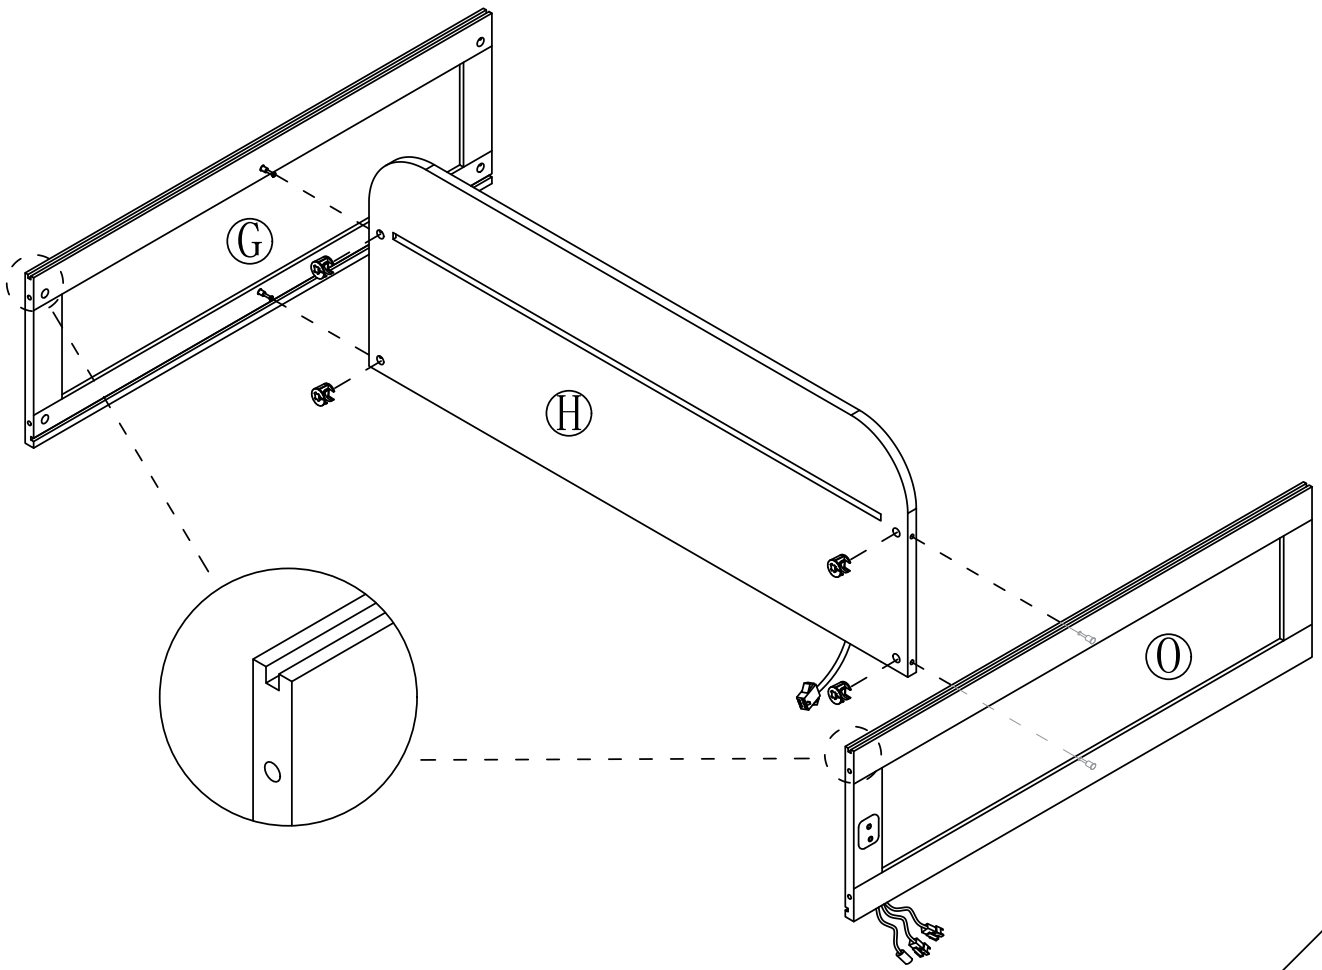


Step 21


2 x4

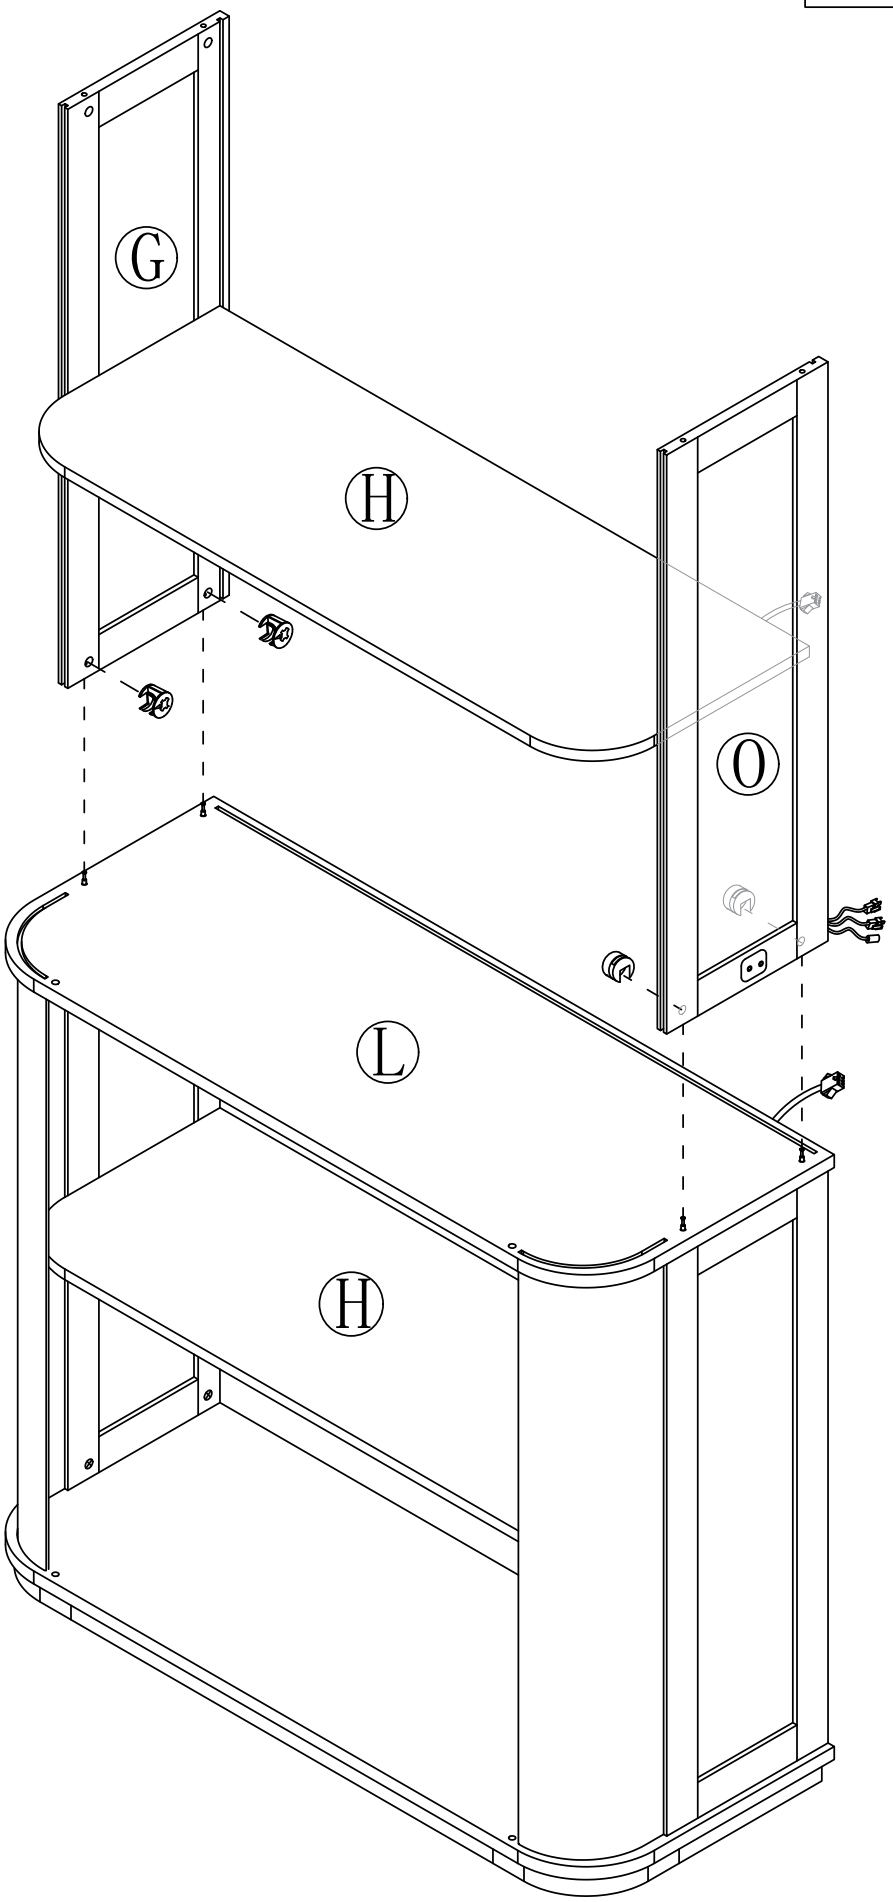


Step 22

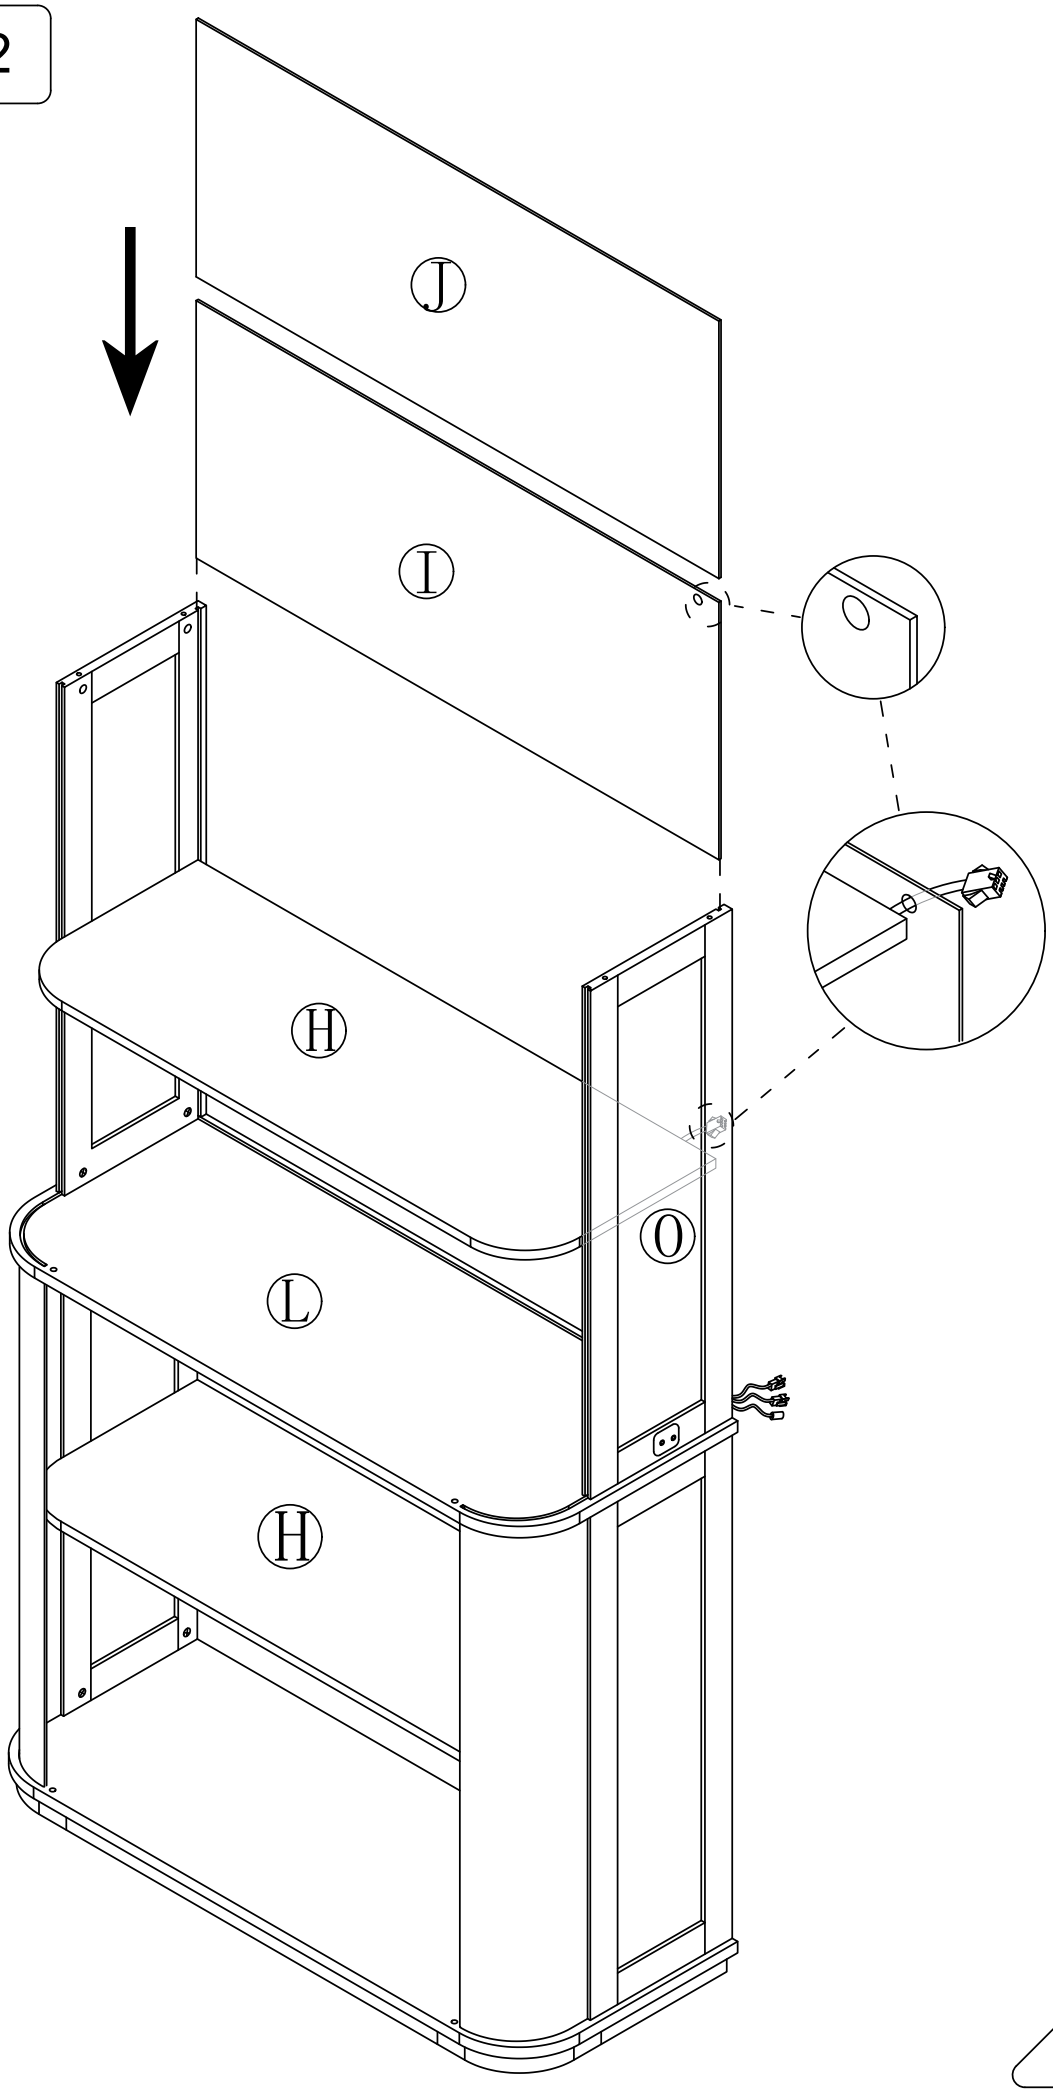


Step 23

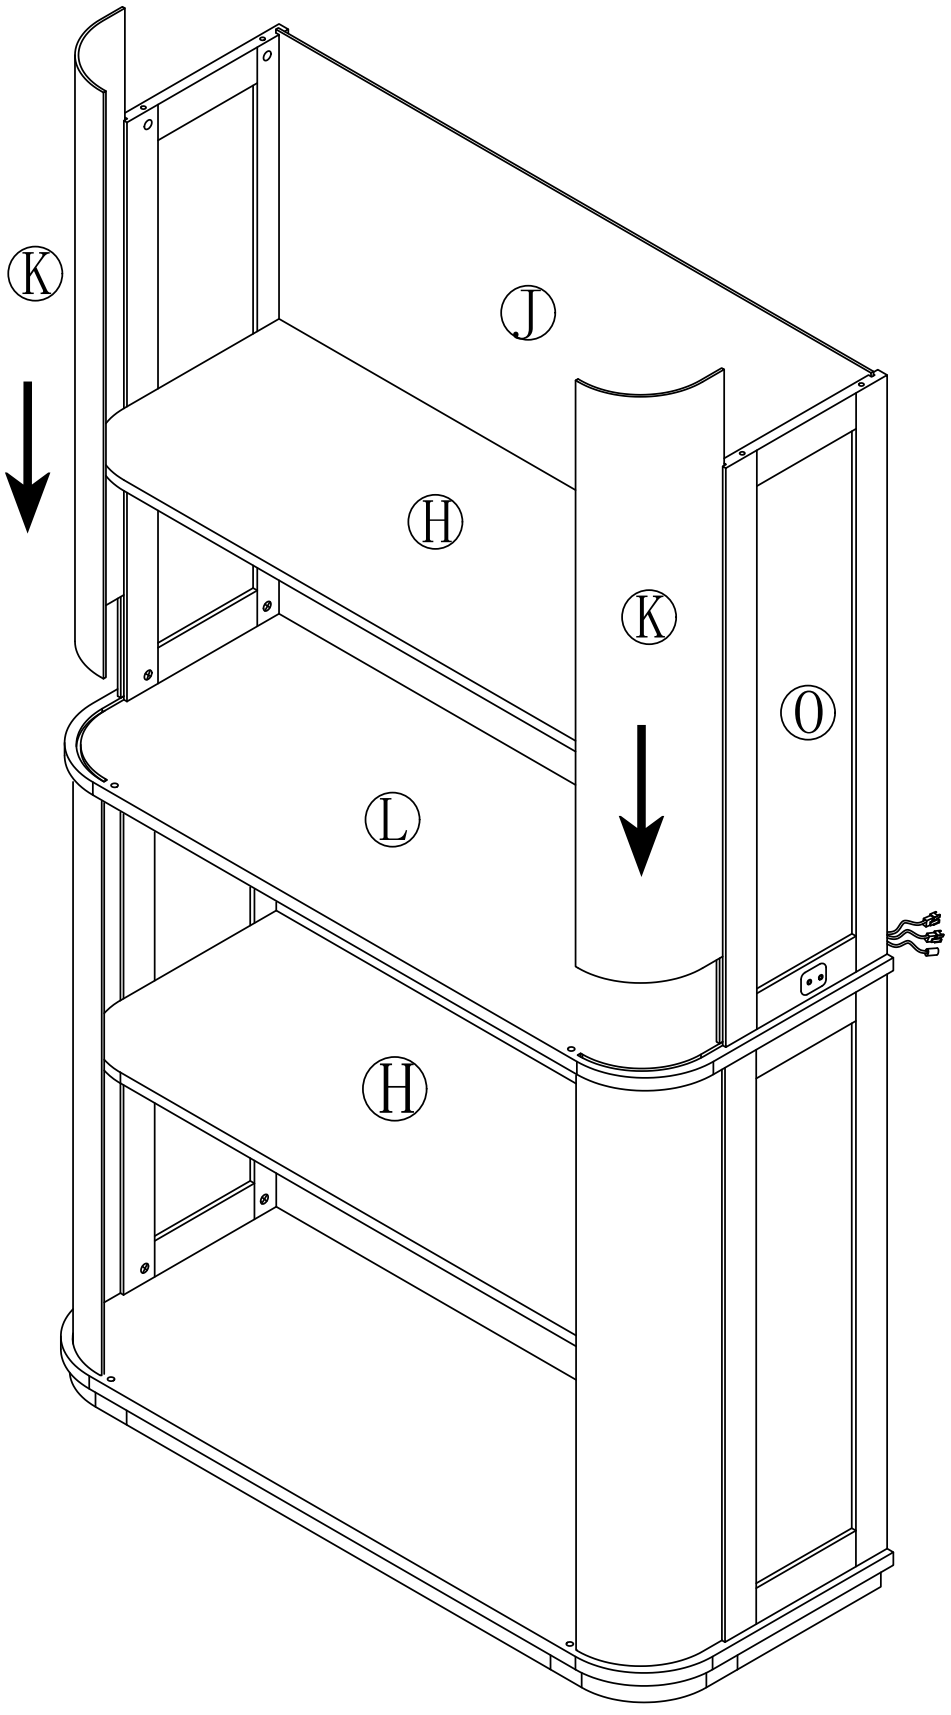



Step 24



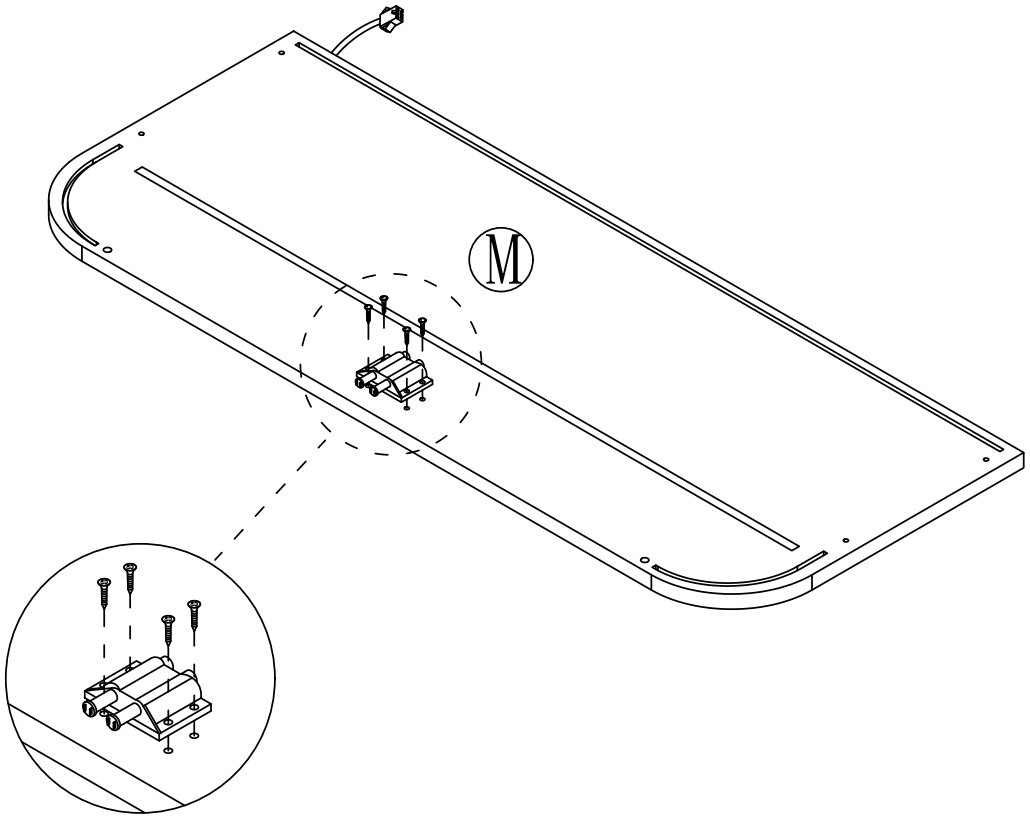


Step 25



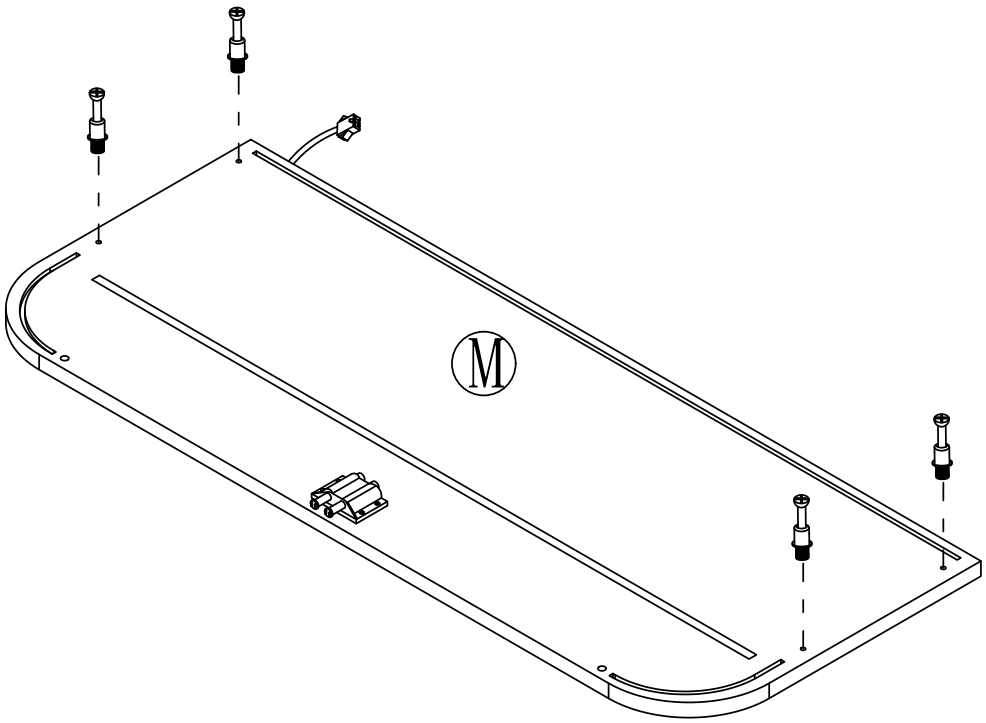


Step 26

② x4

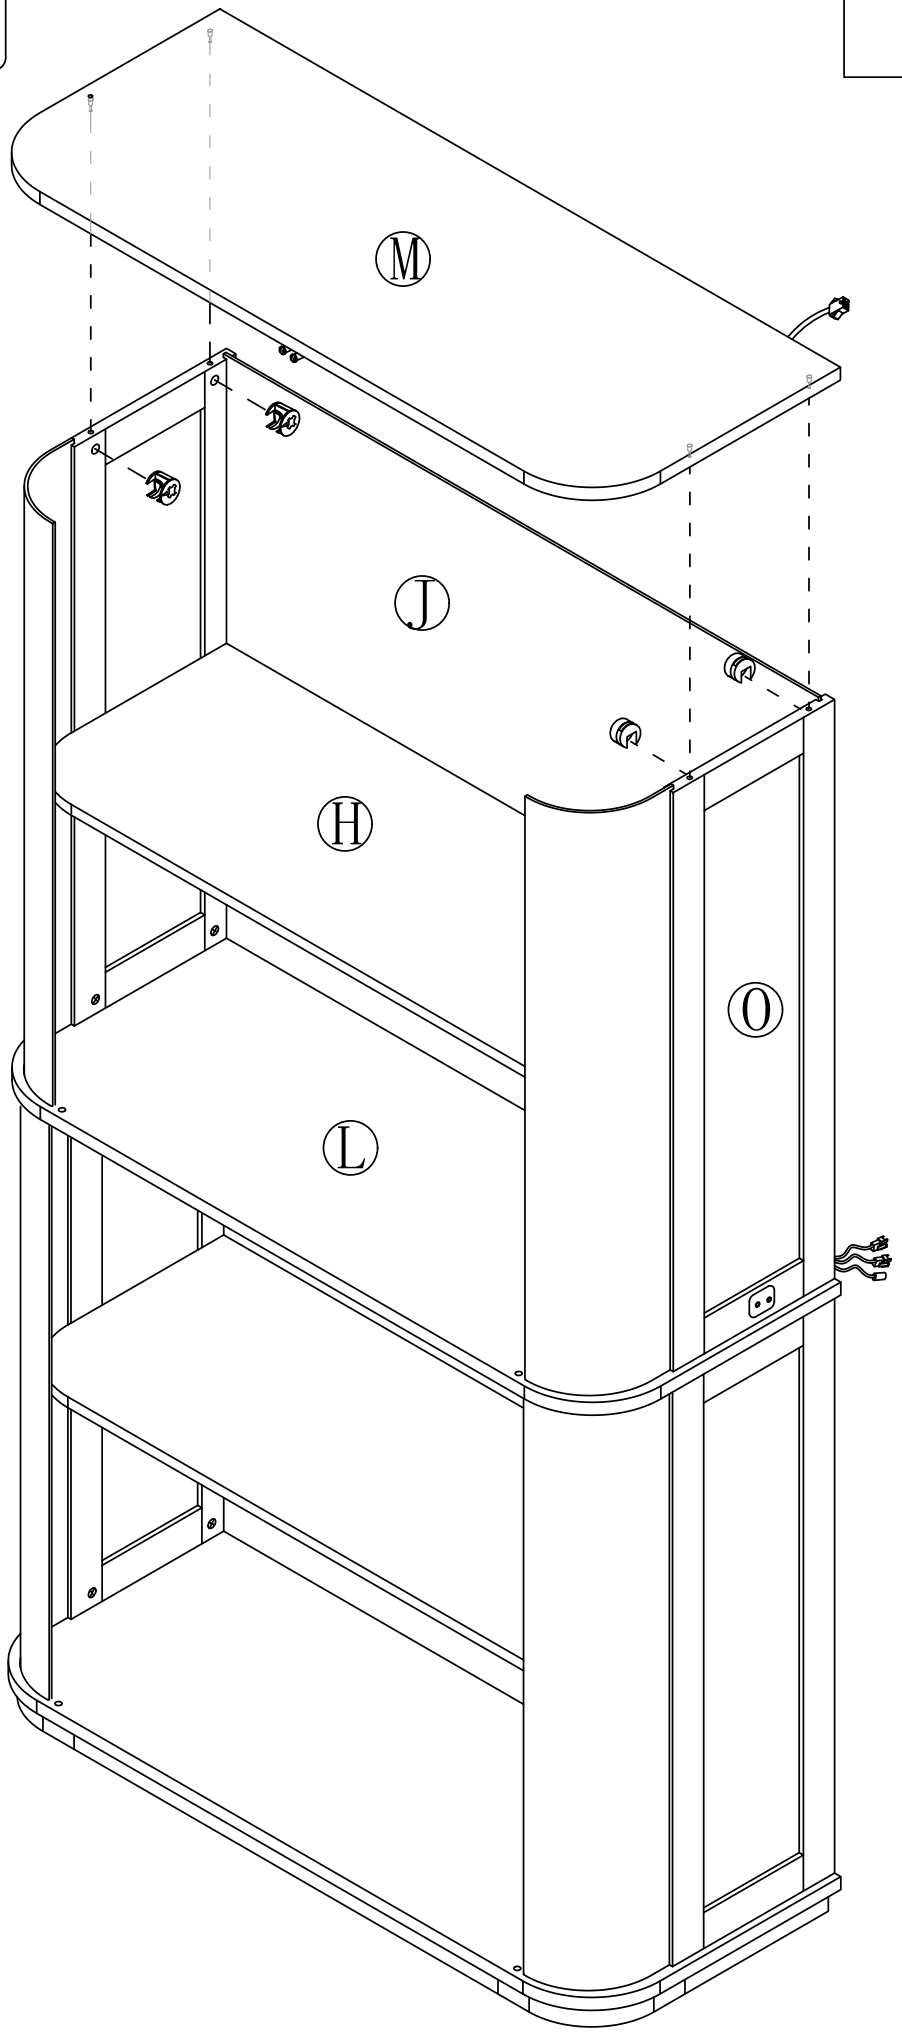


Step 27


5 x2

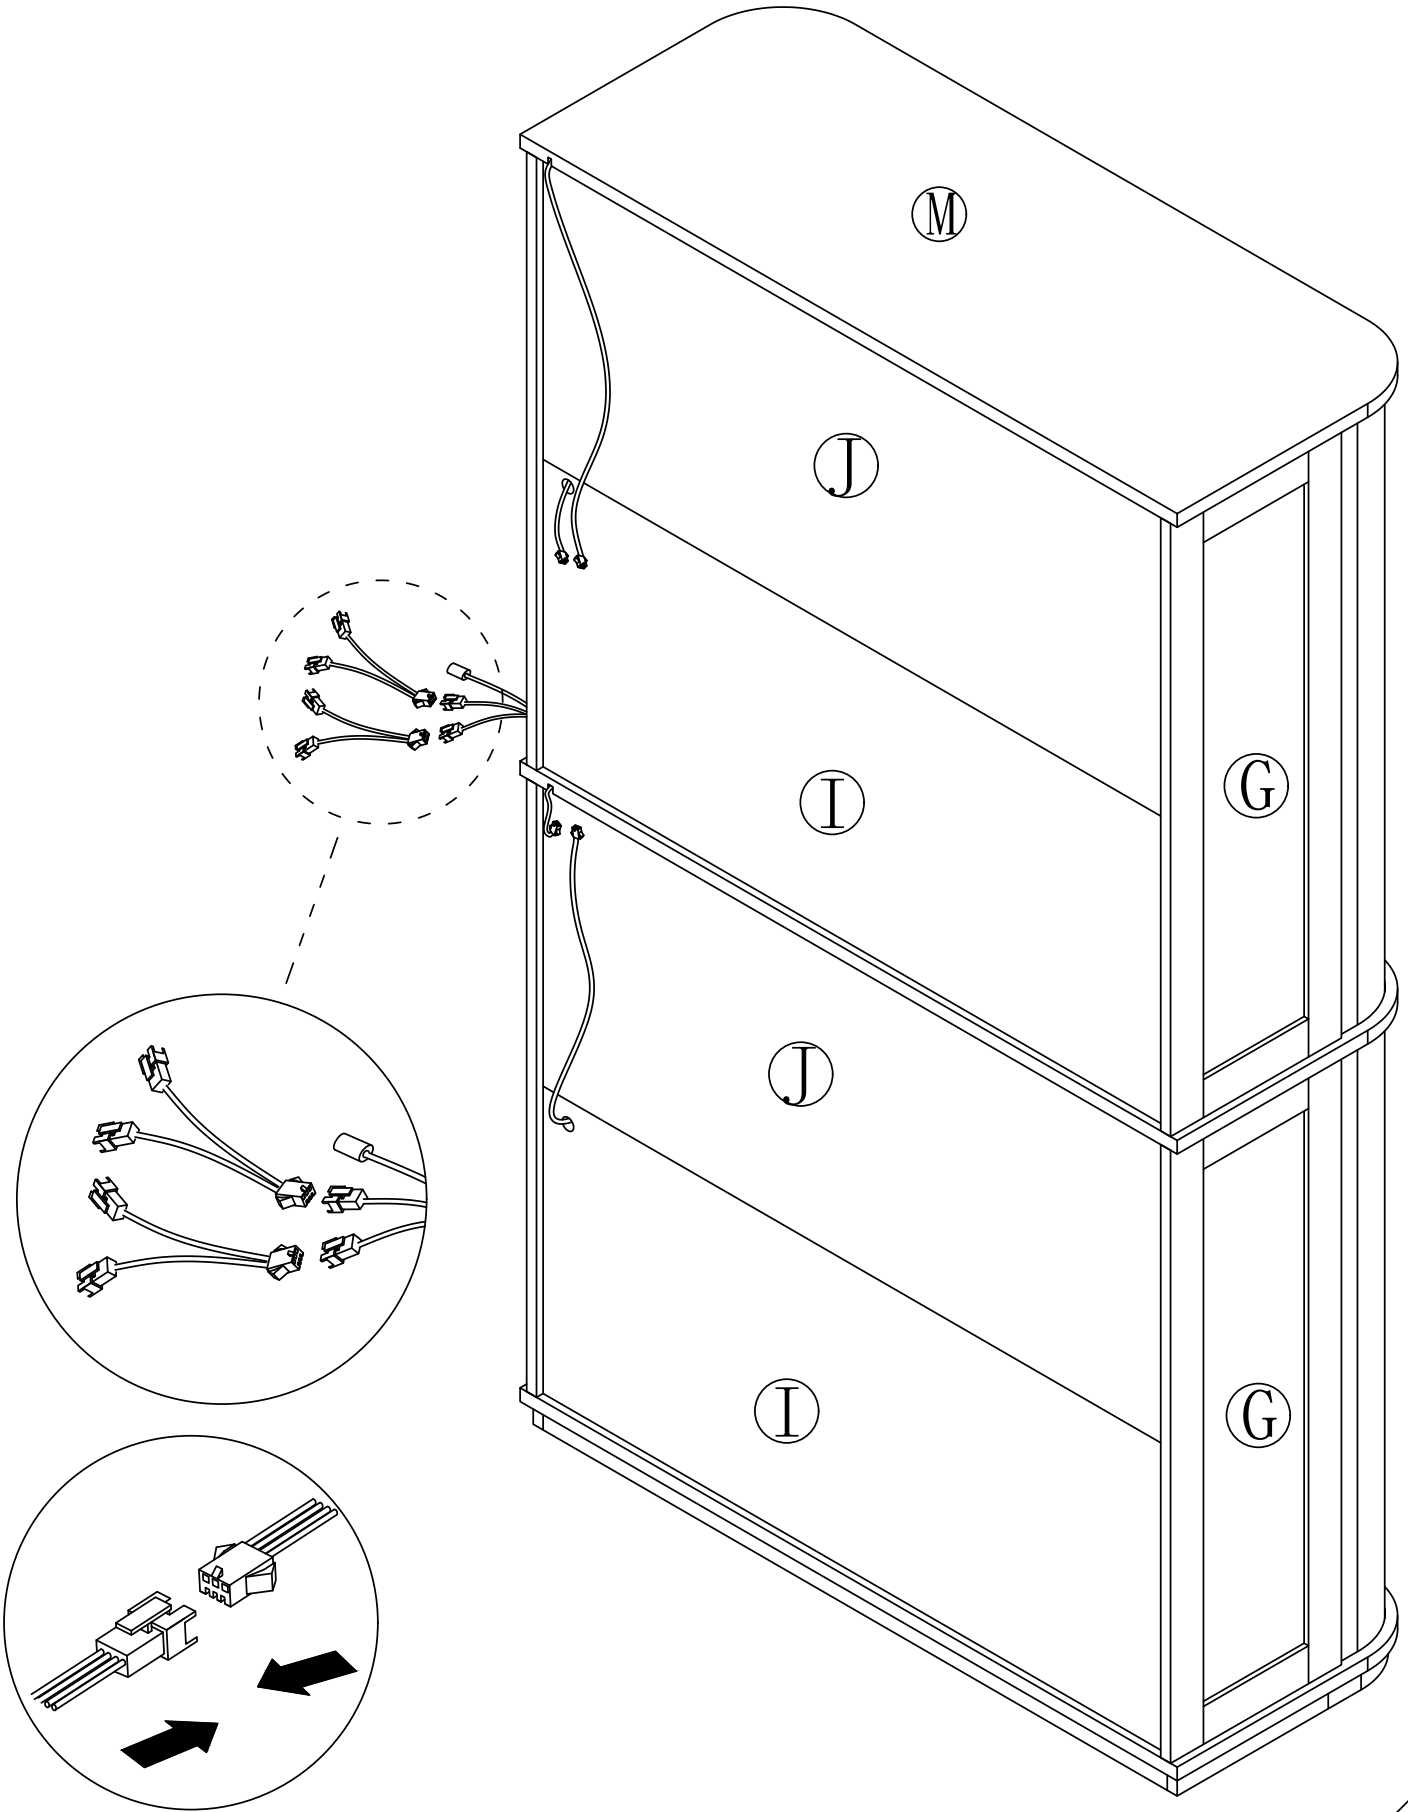


Step 28

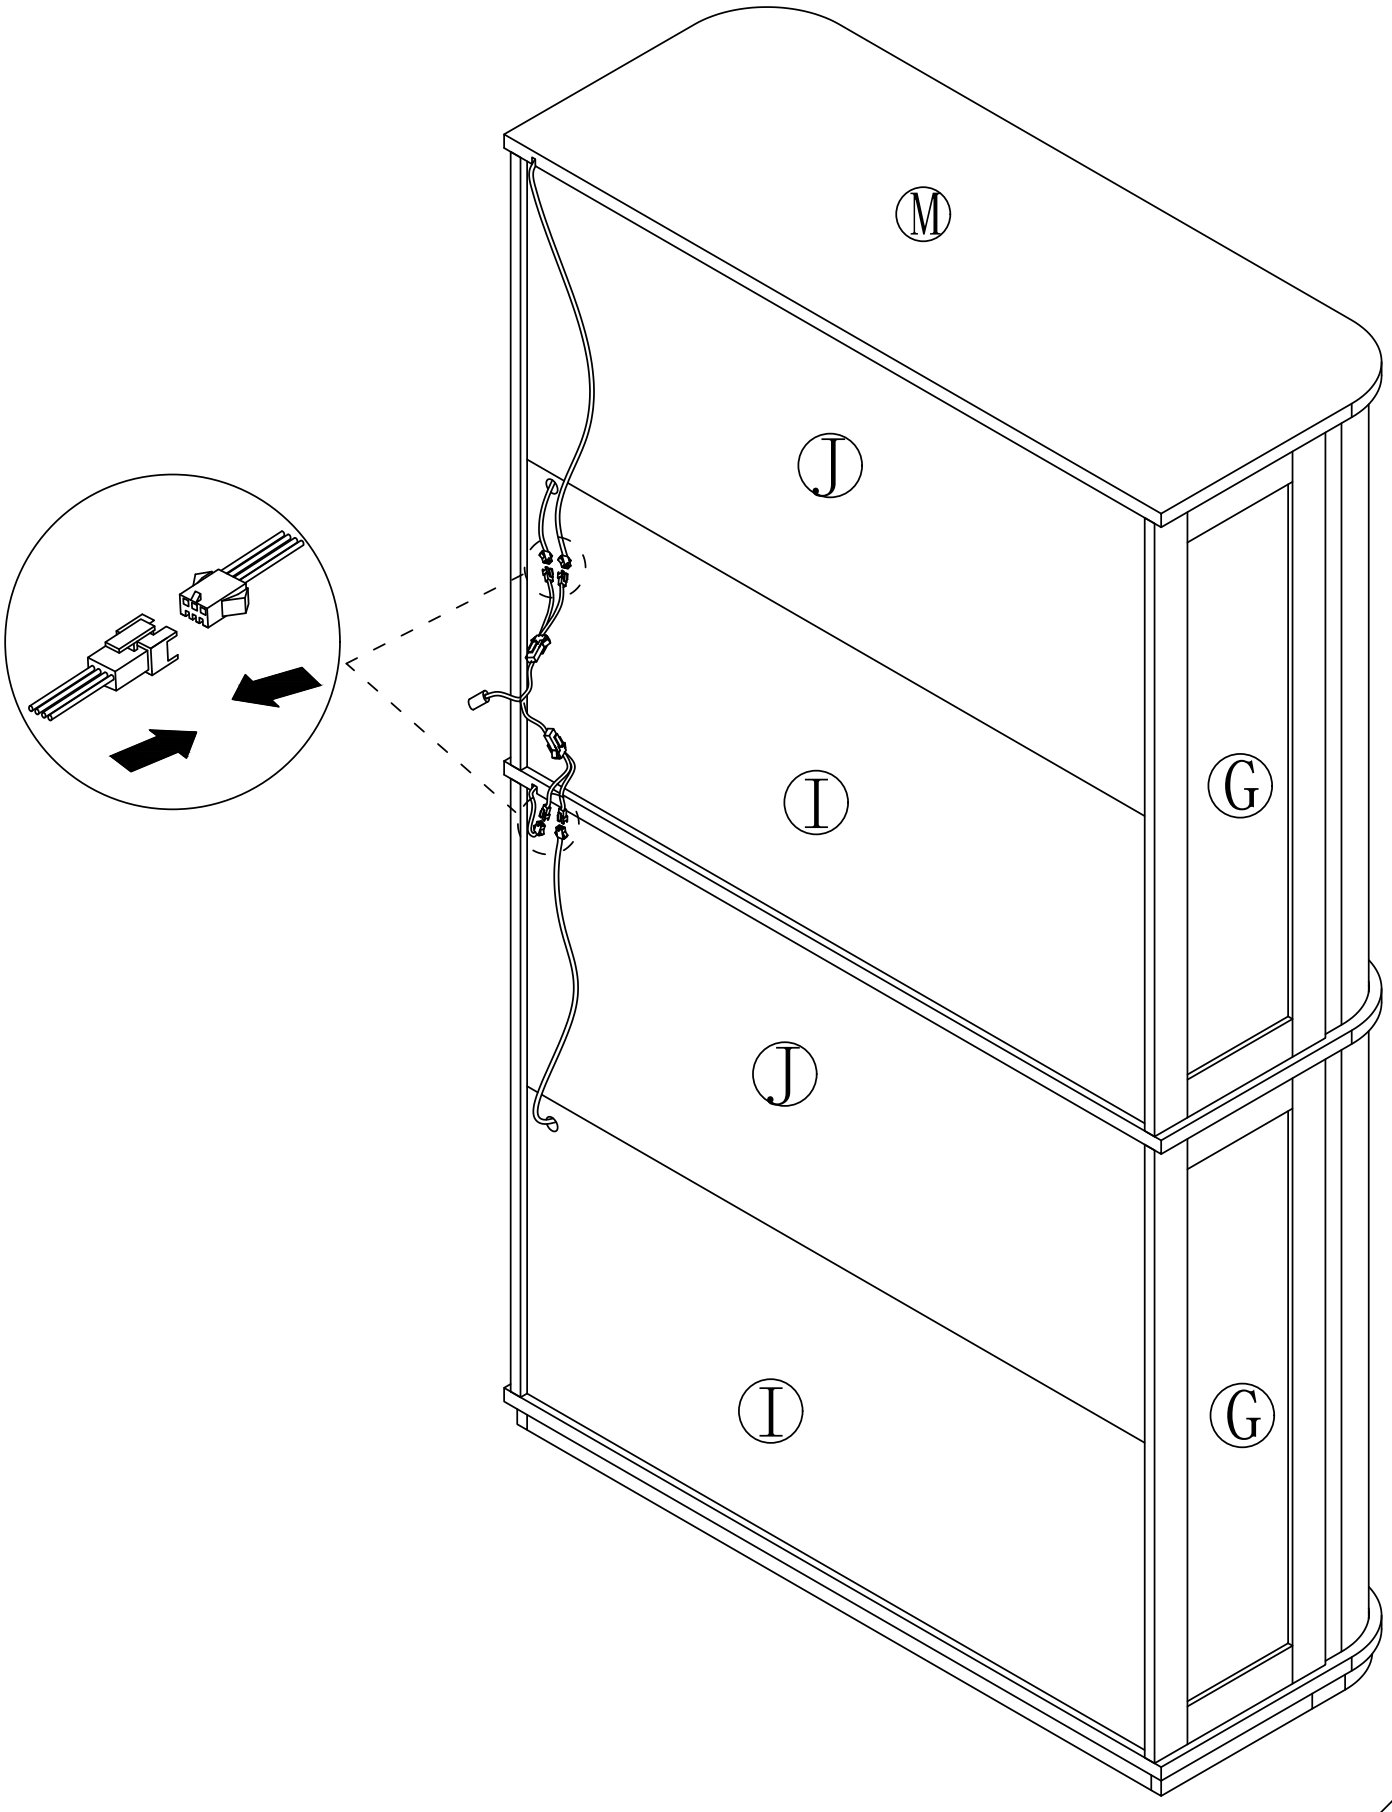



Step 29

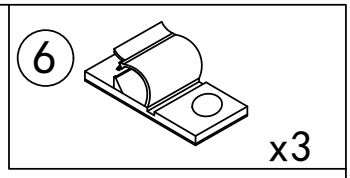

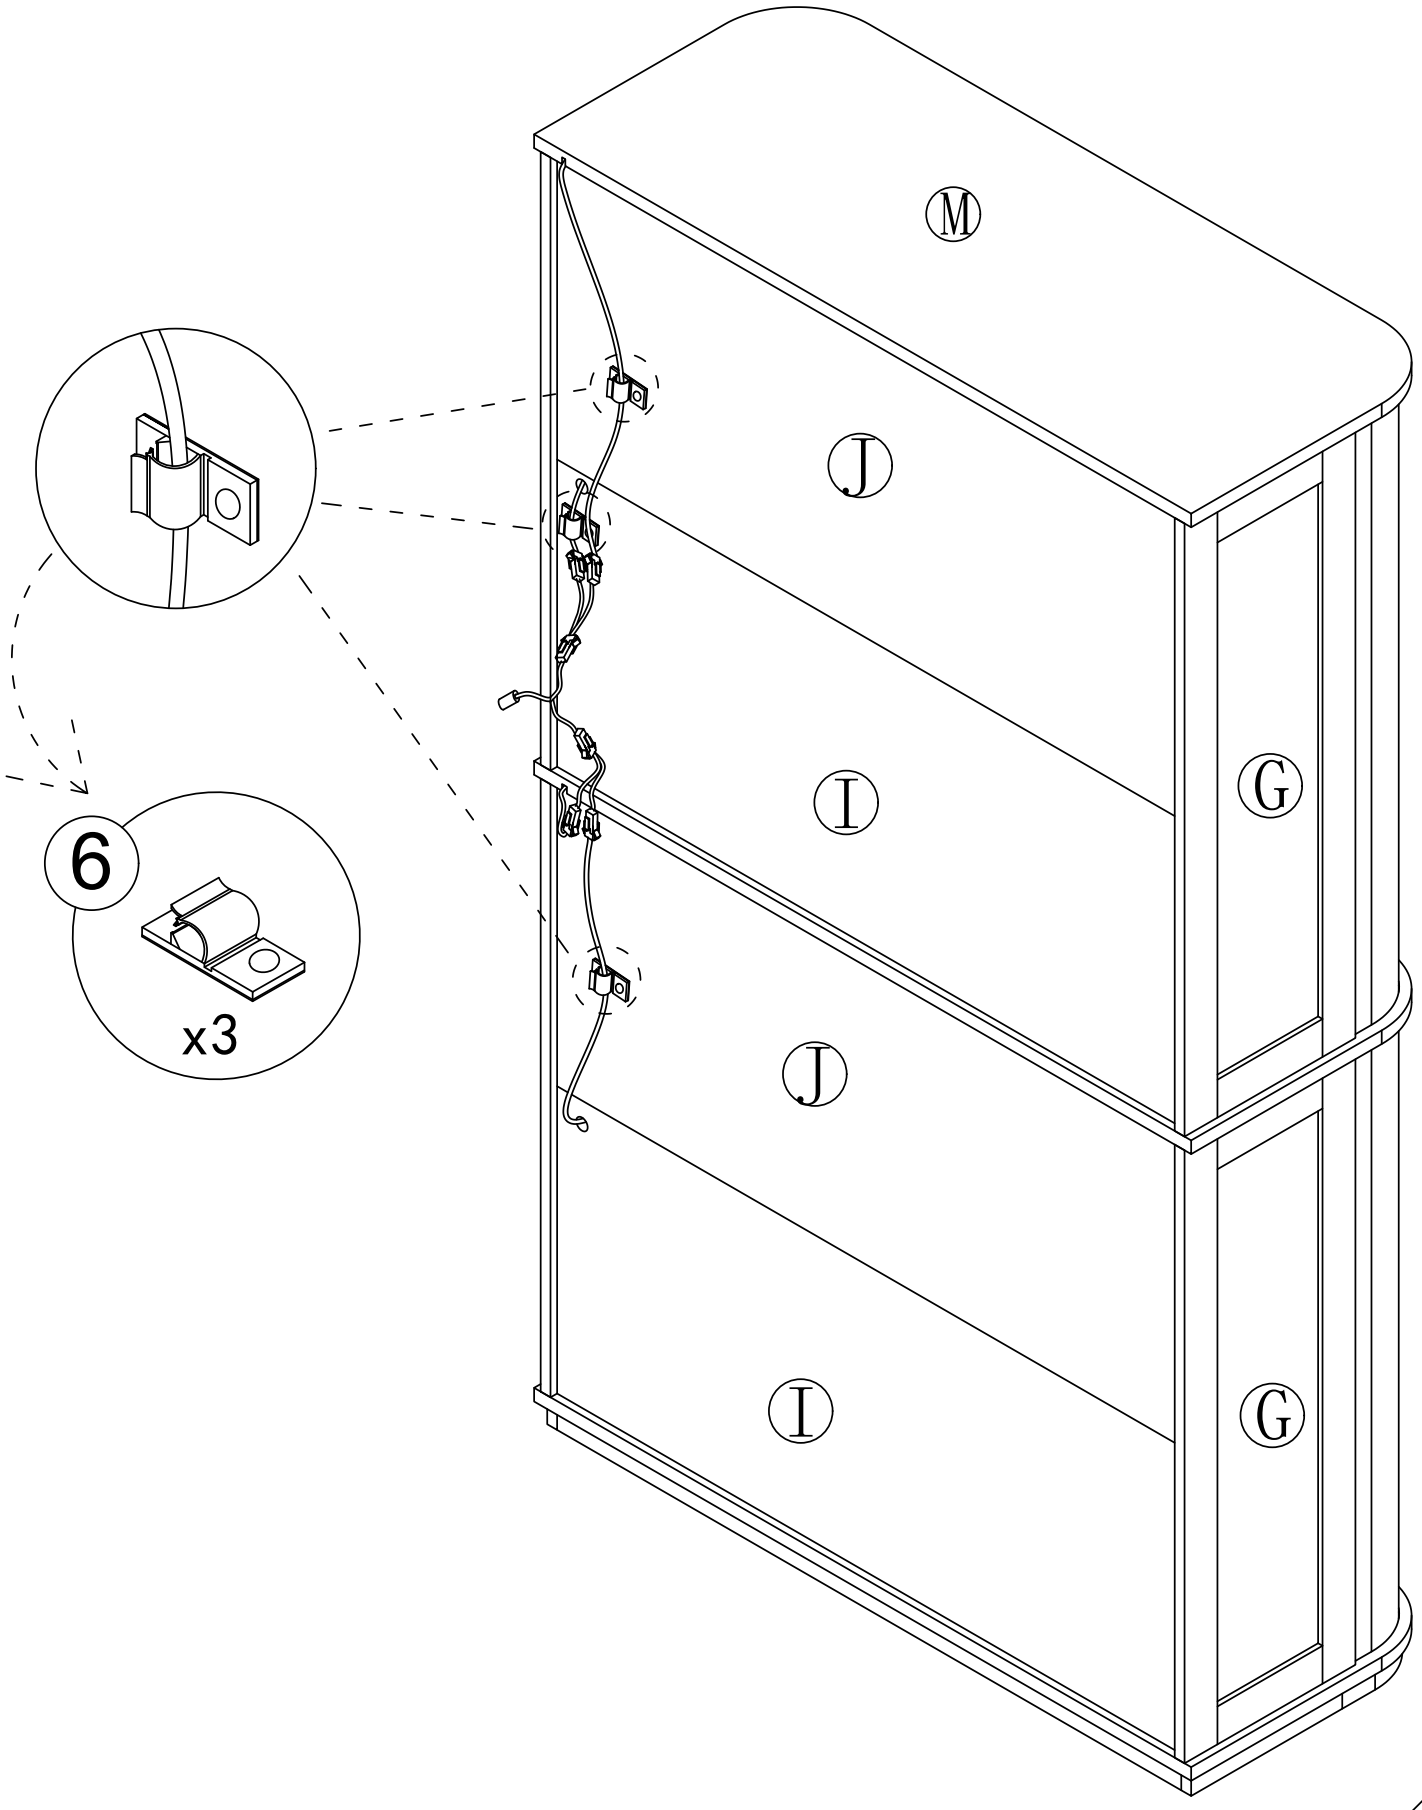



Step 30



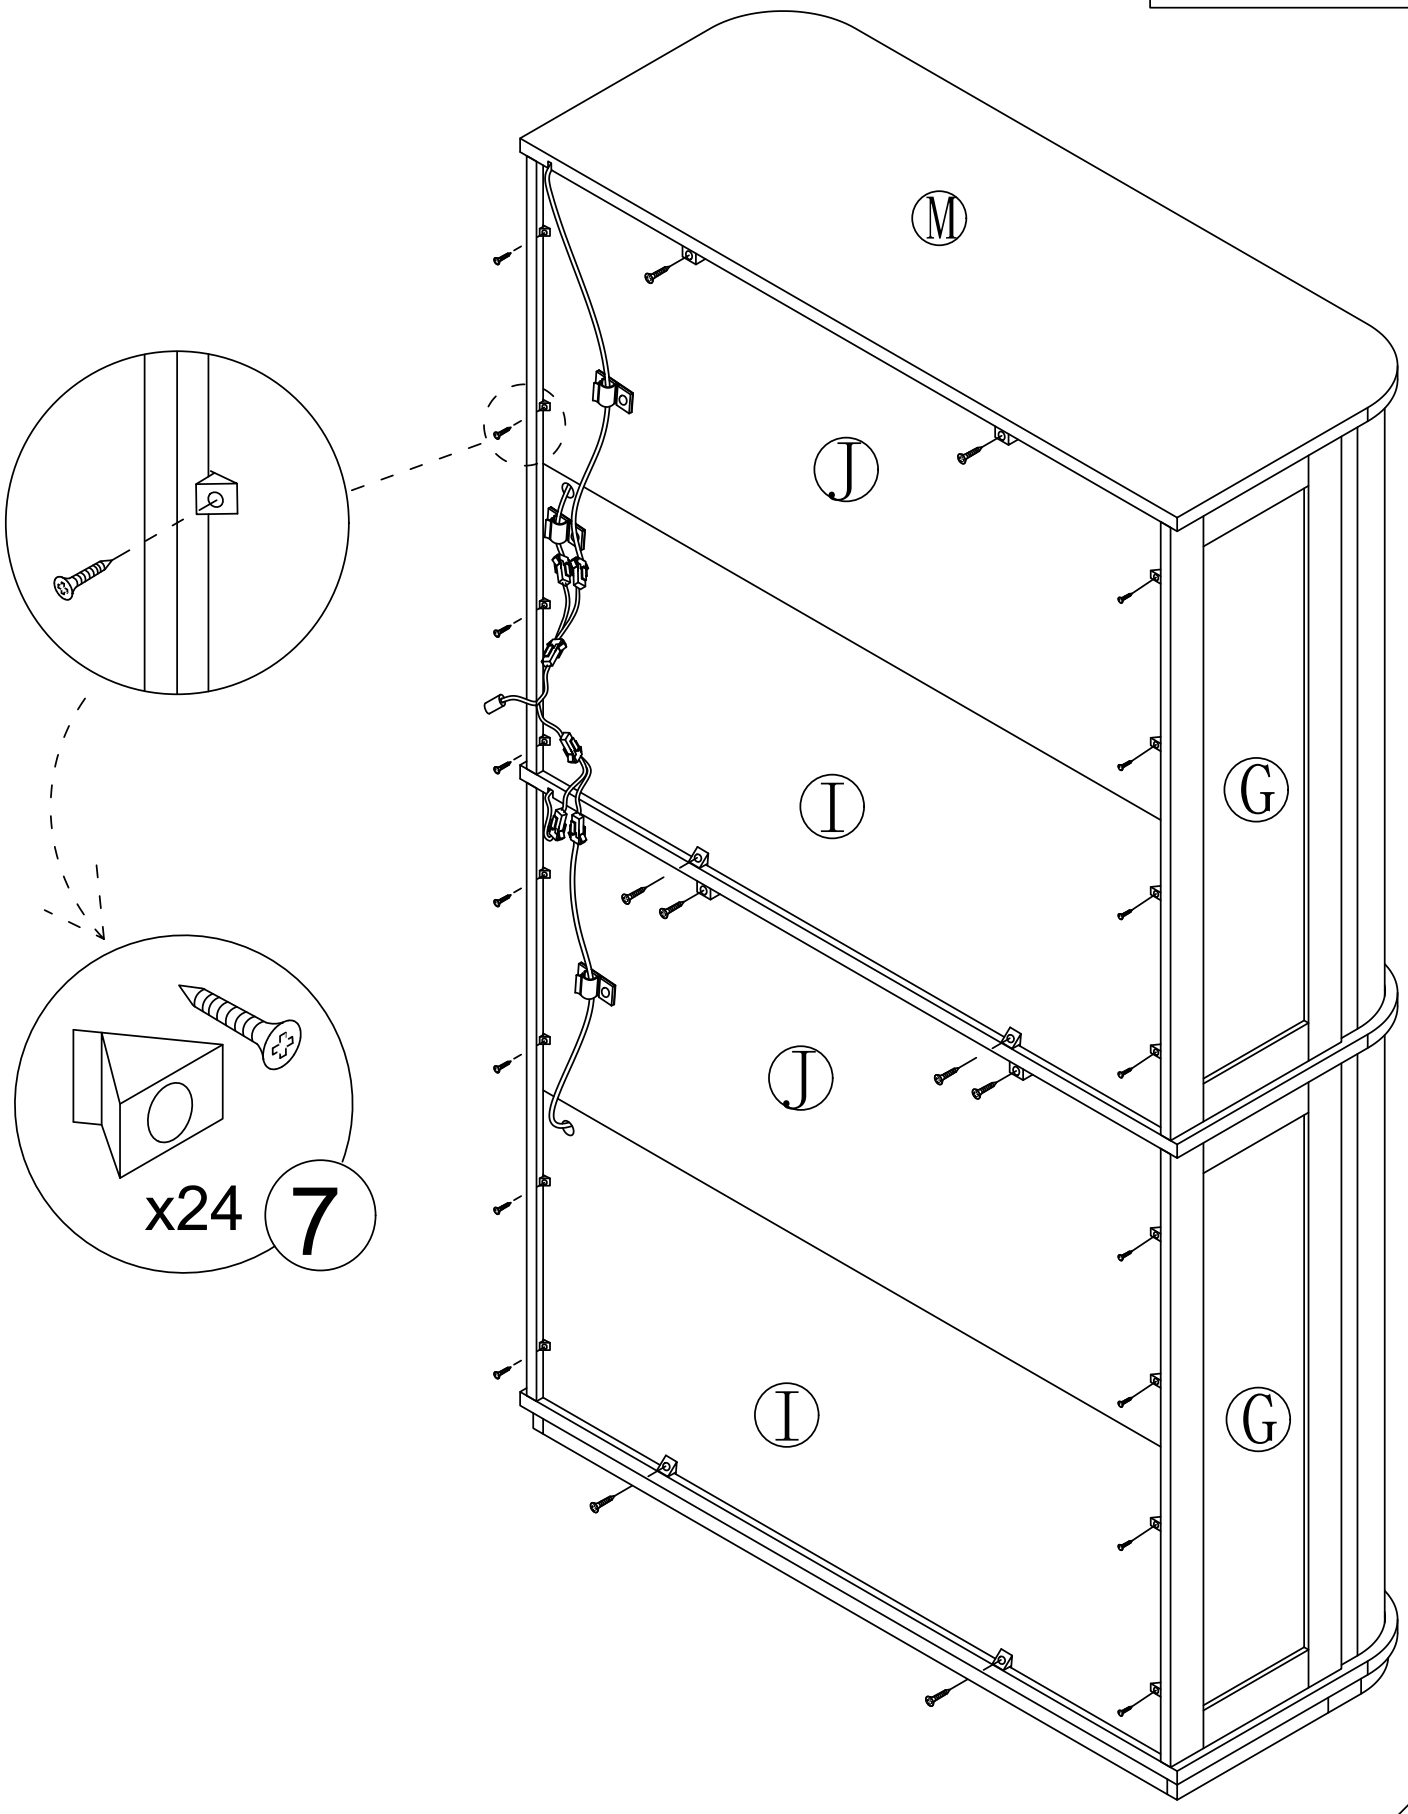


Step 31

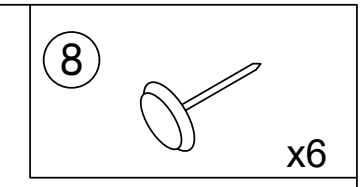

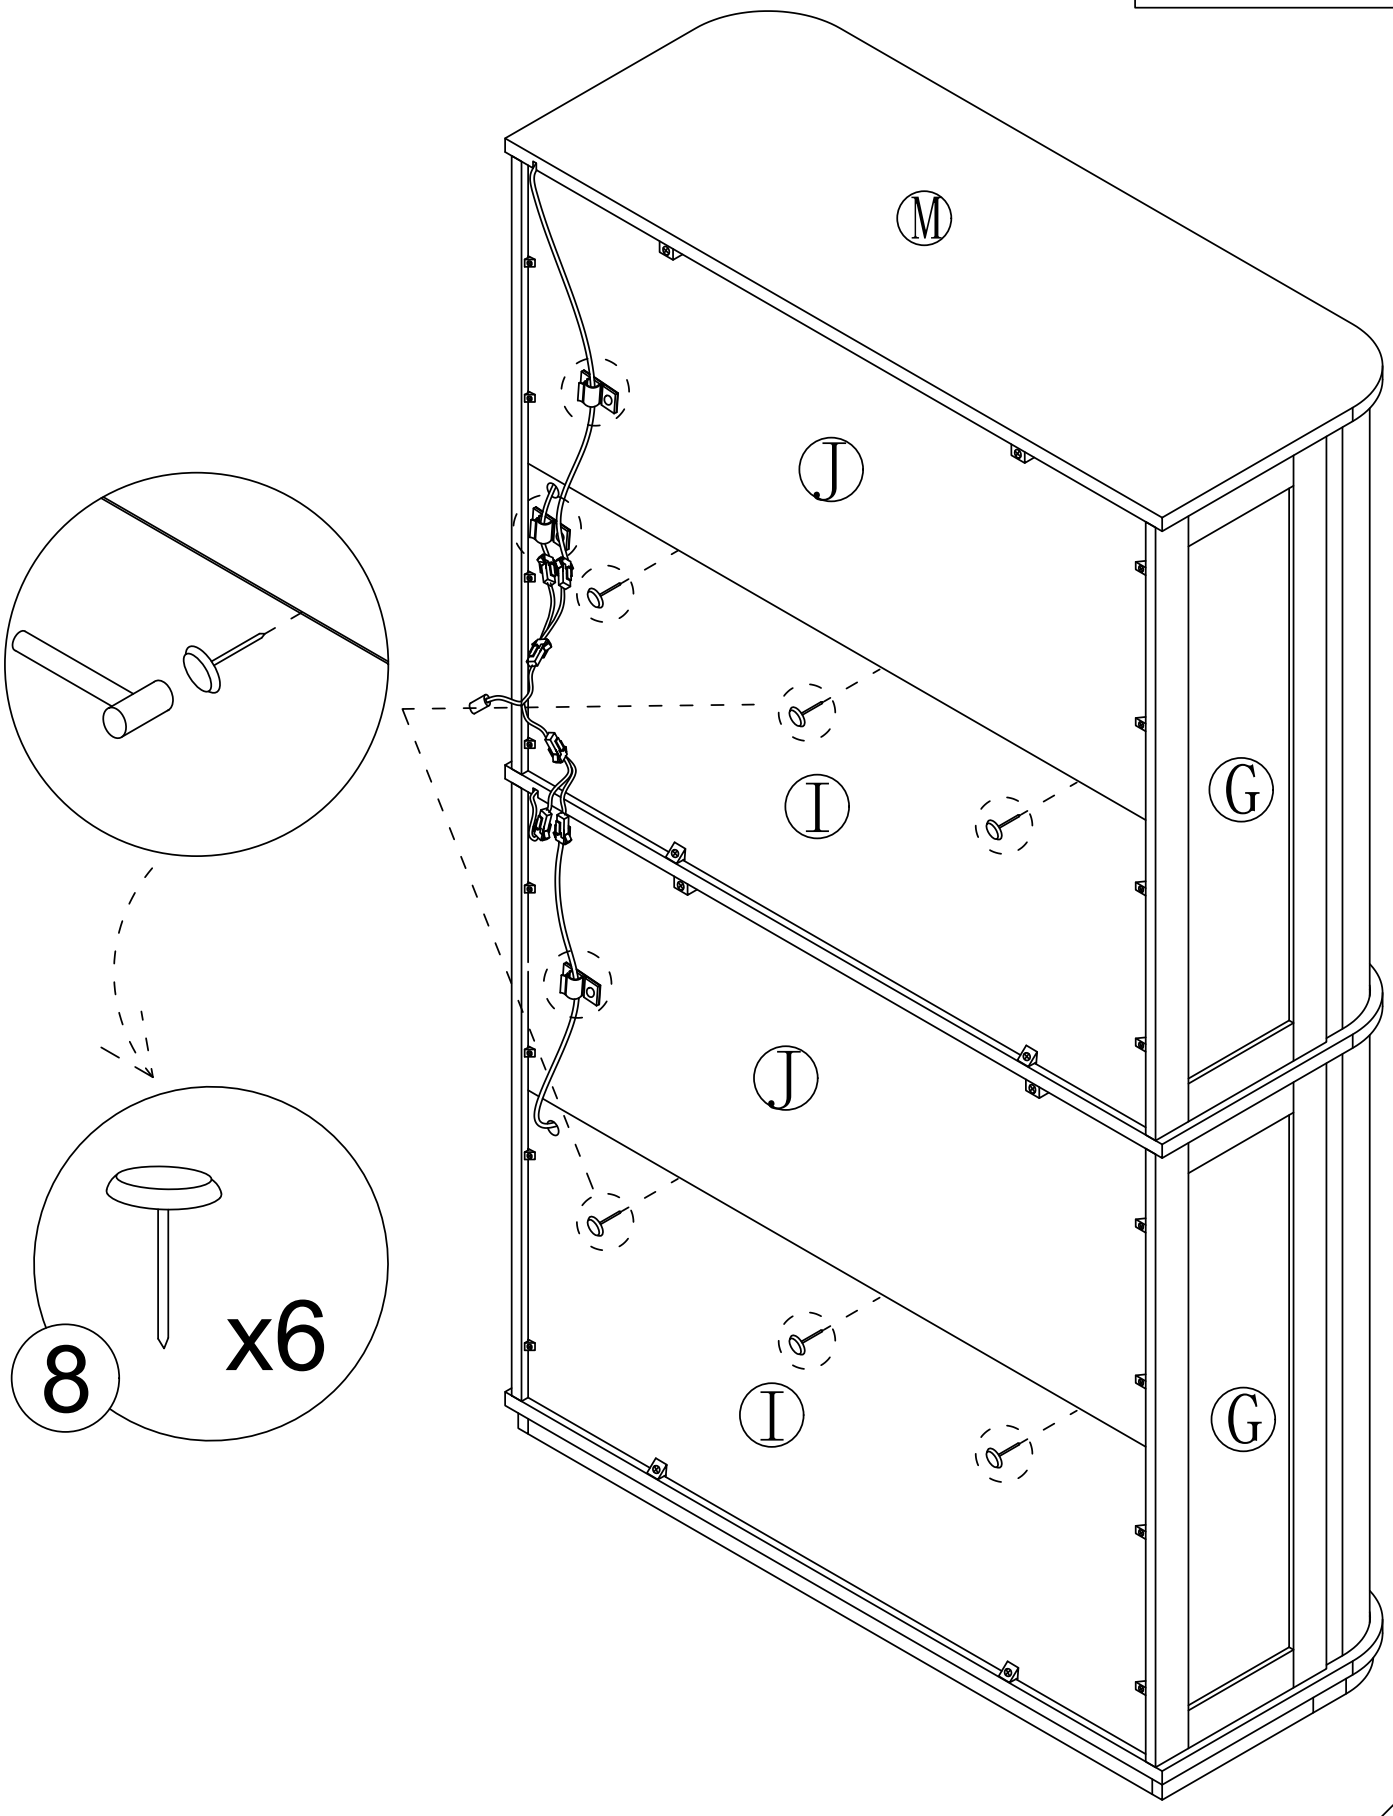


Step 32


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

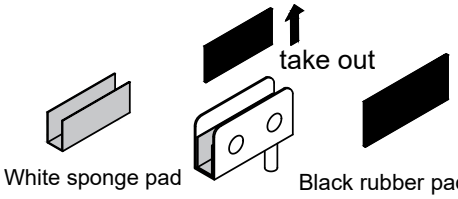


④



x2




x2

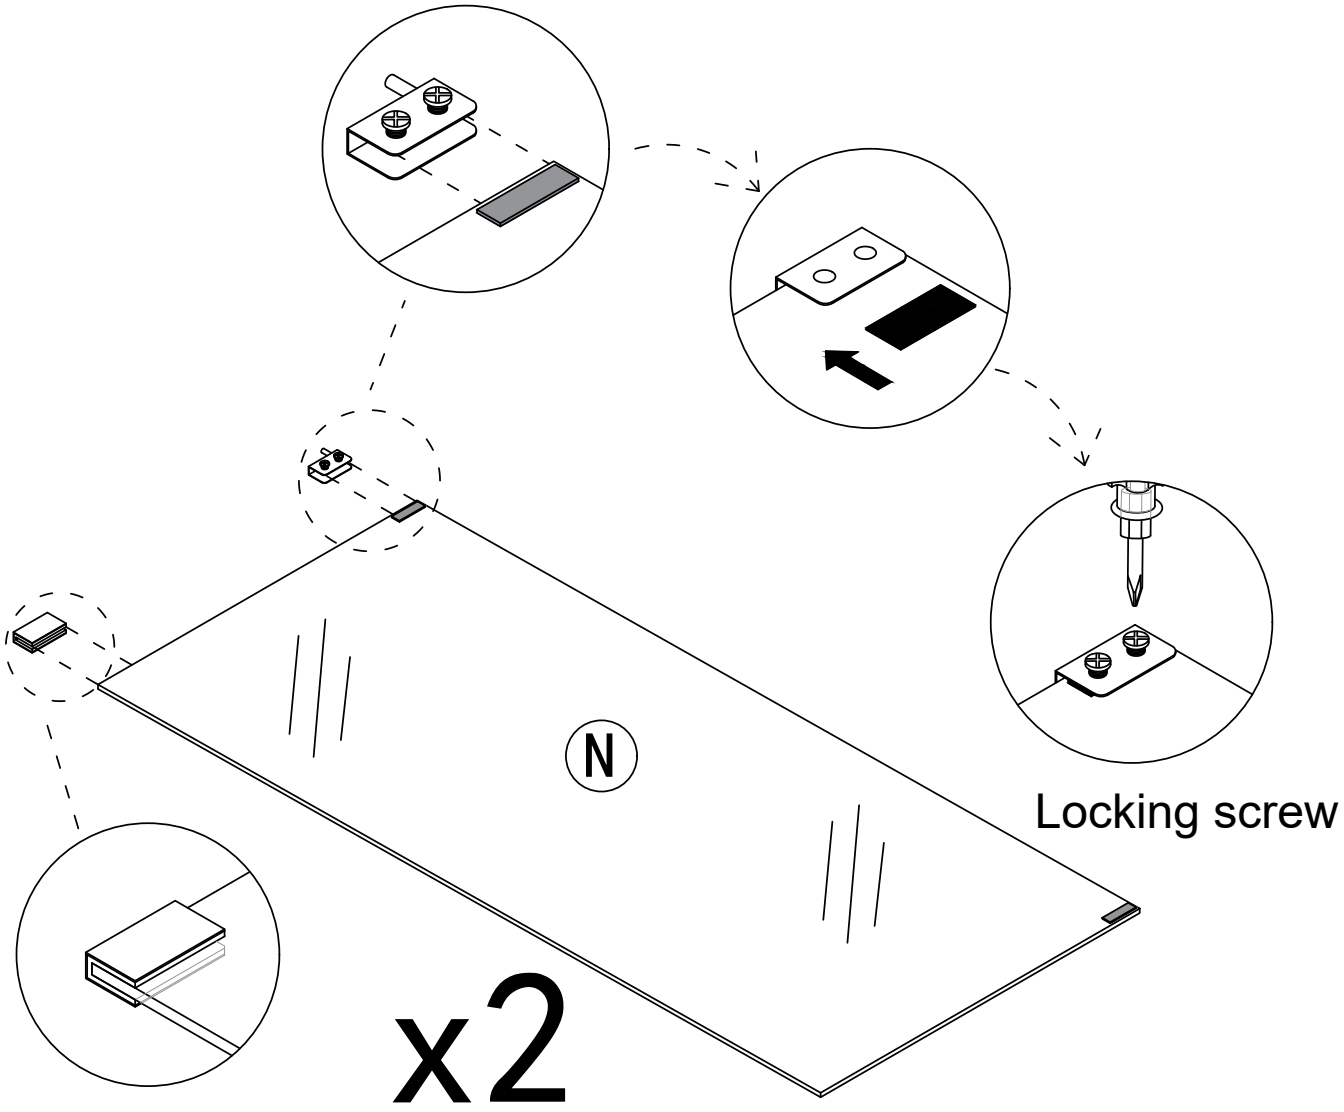


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 33




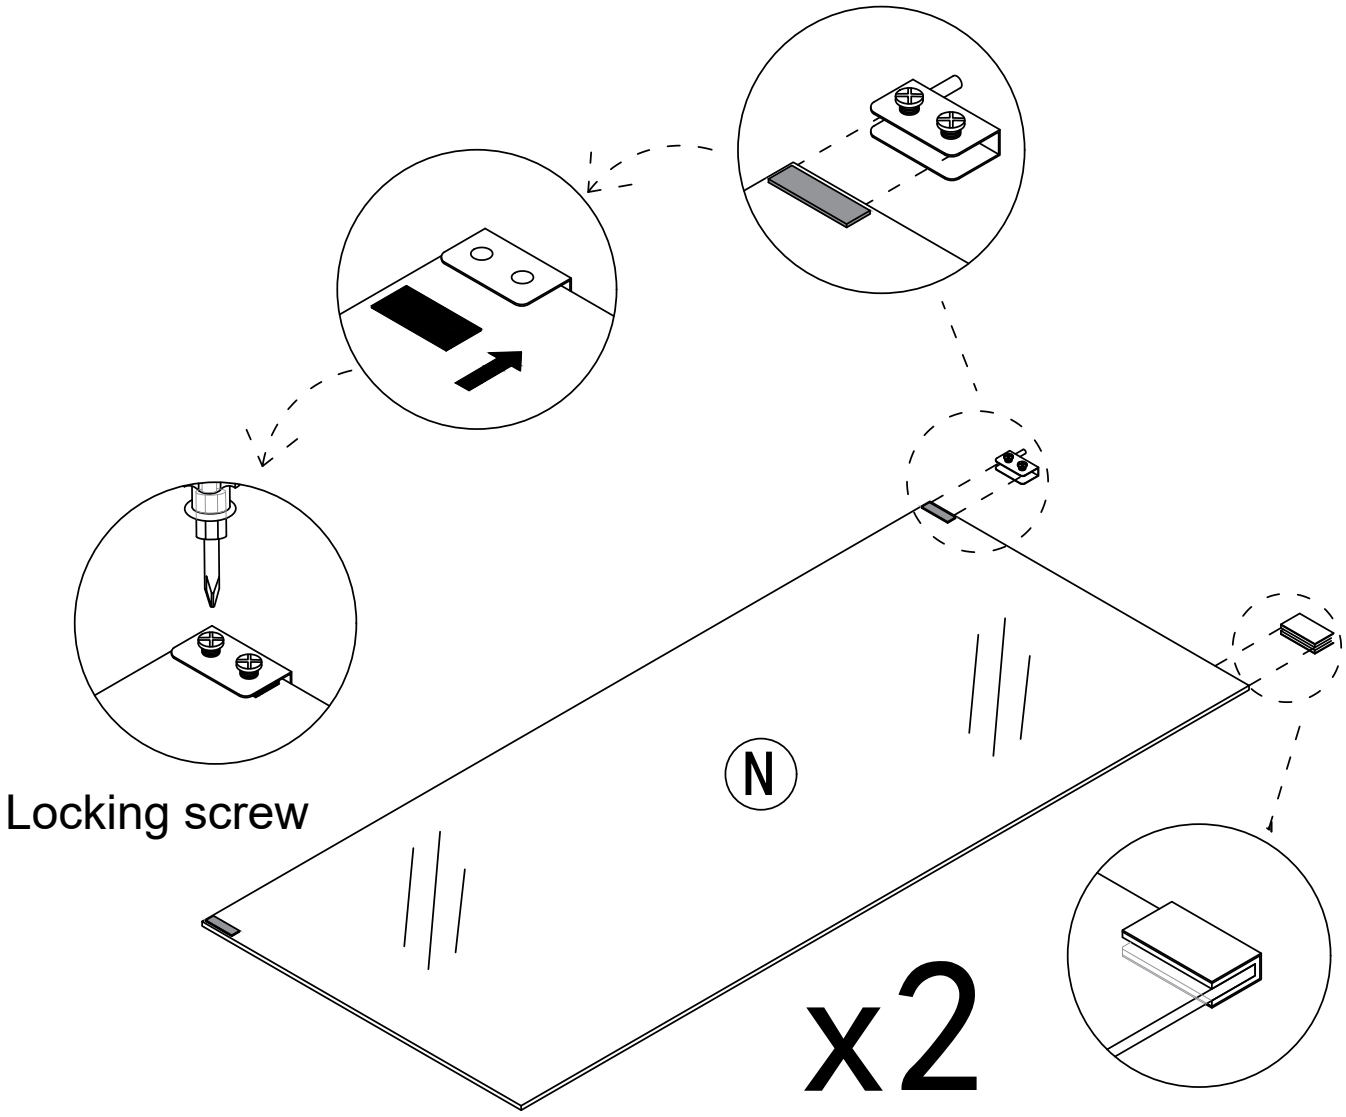

Pay attention to the direction of the door hinge,
rotate the screws to compress the black gasket,
and do not place it in the opposite direction

Place the black gasket on the side
where the screws are installed

Step 34




Step 35


Pay attention to the direction of the door hinge during installation

④ x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed





third

Locking screw

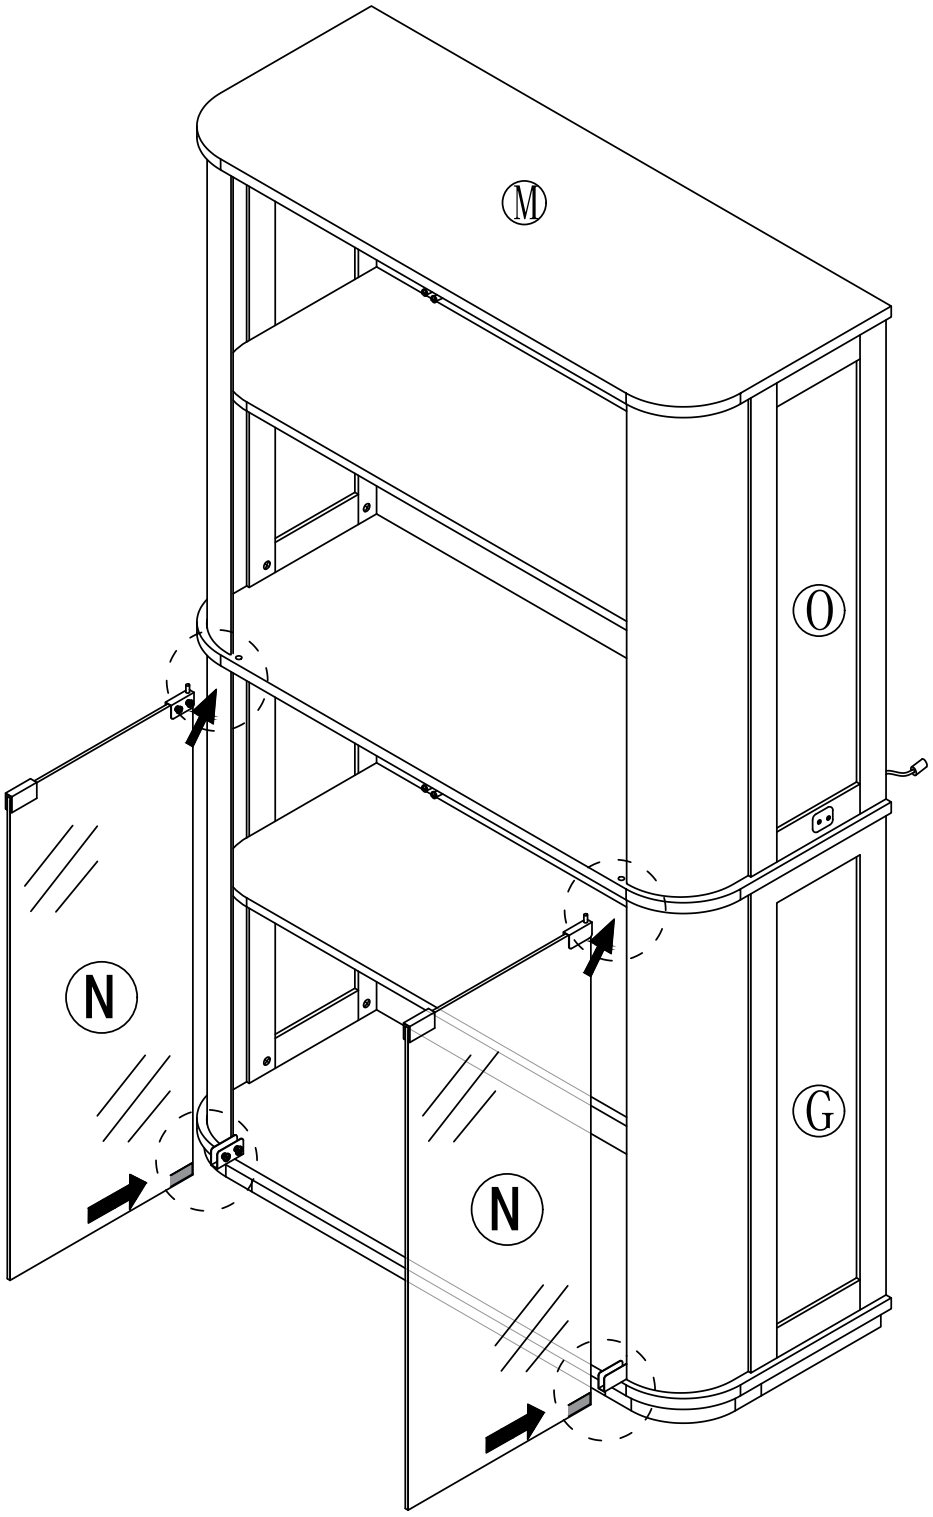

Step 36




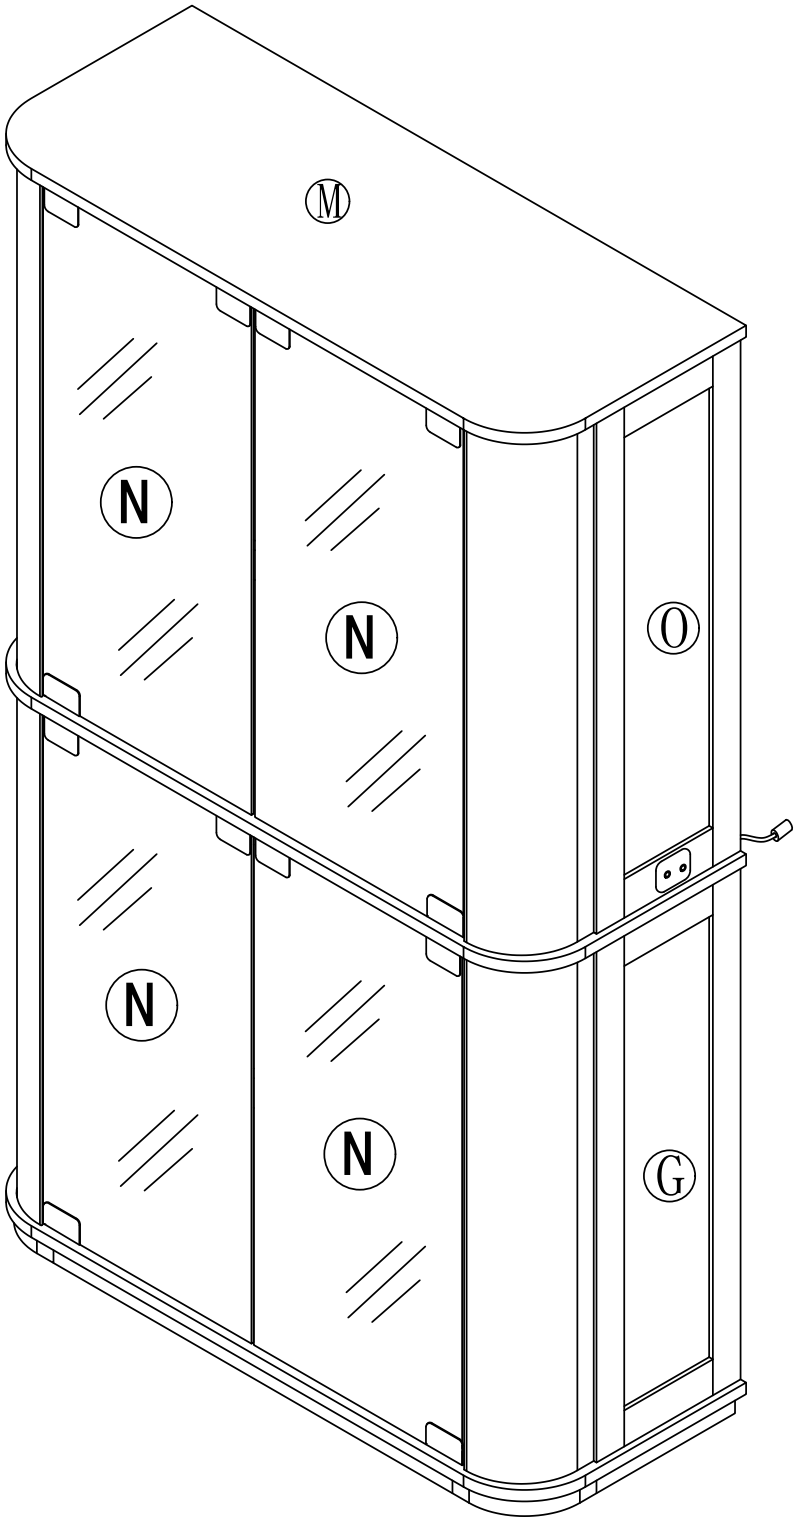


Repeat the door installation steps.

Step 37


The rebound device automatically opens and closes by pressing

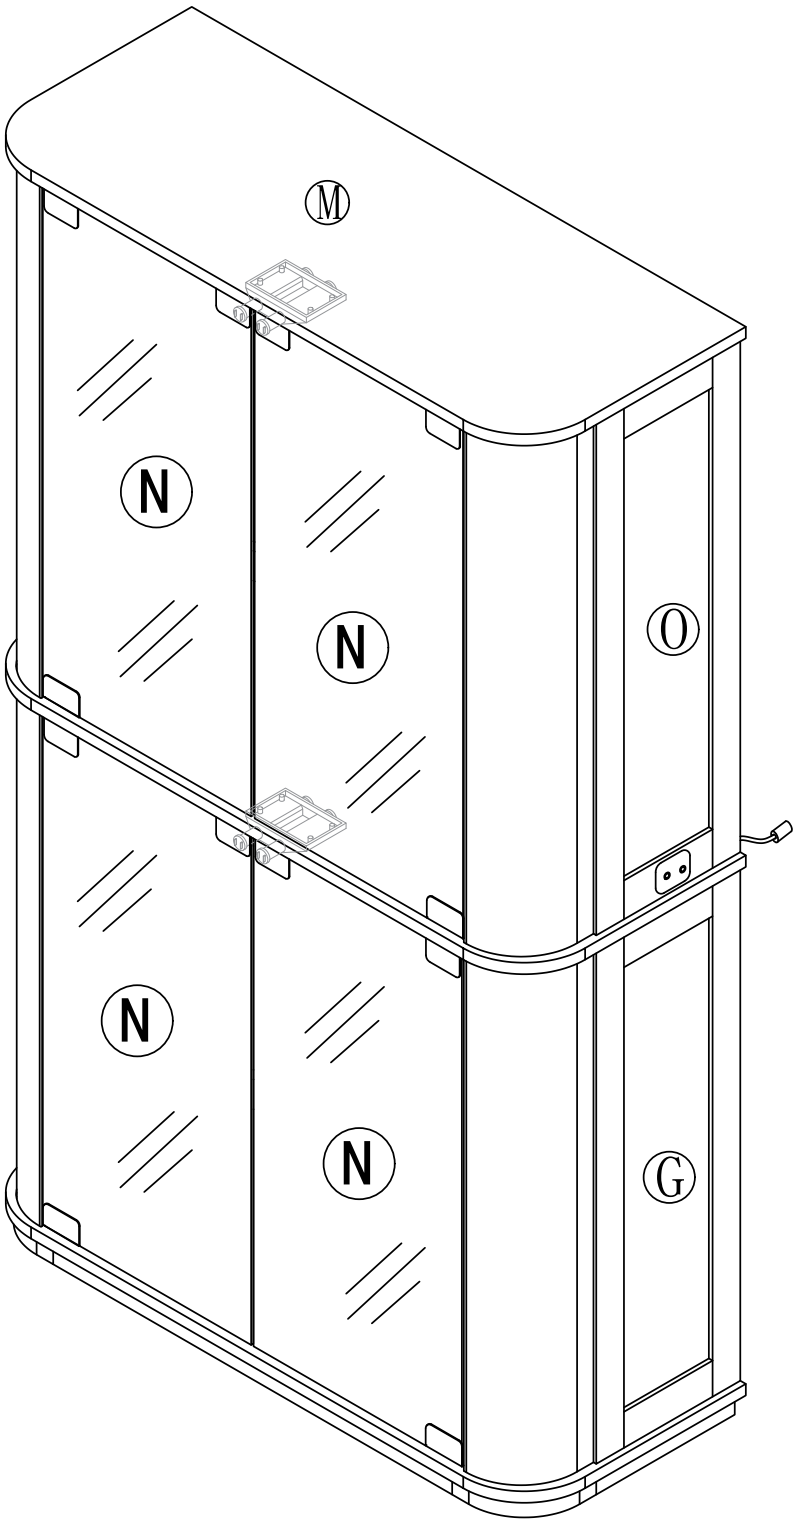


Open the glass door

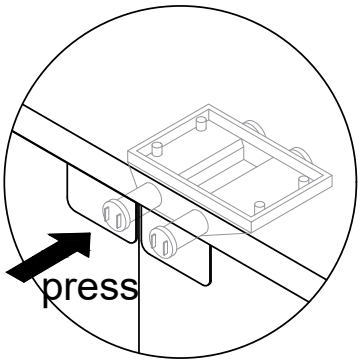


Close the glass door

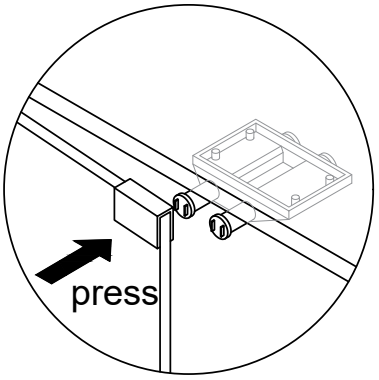

Step 38





x1

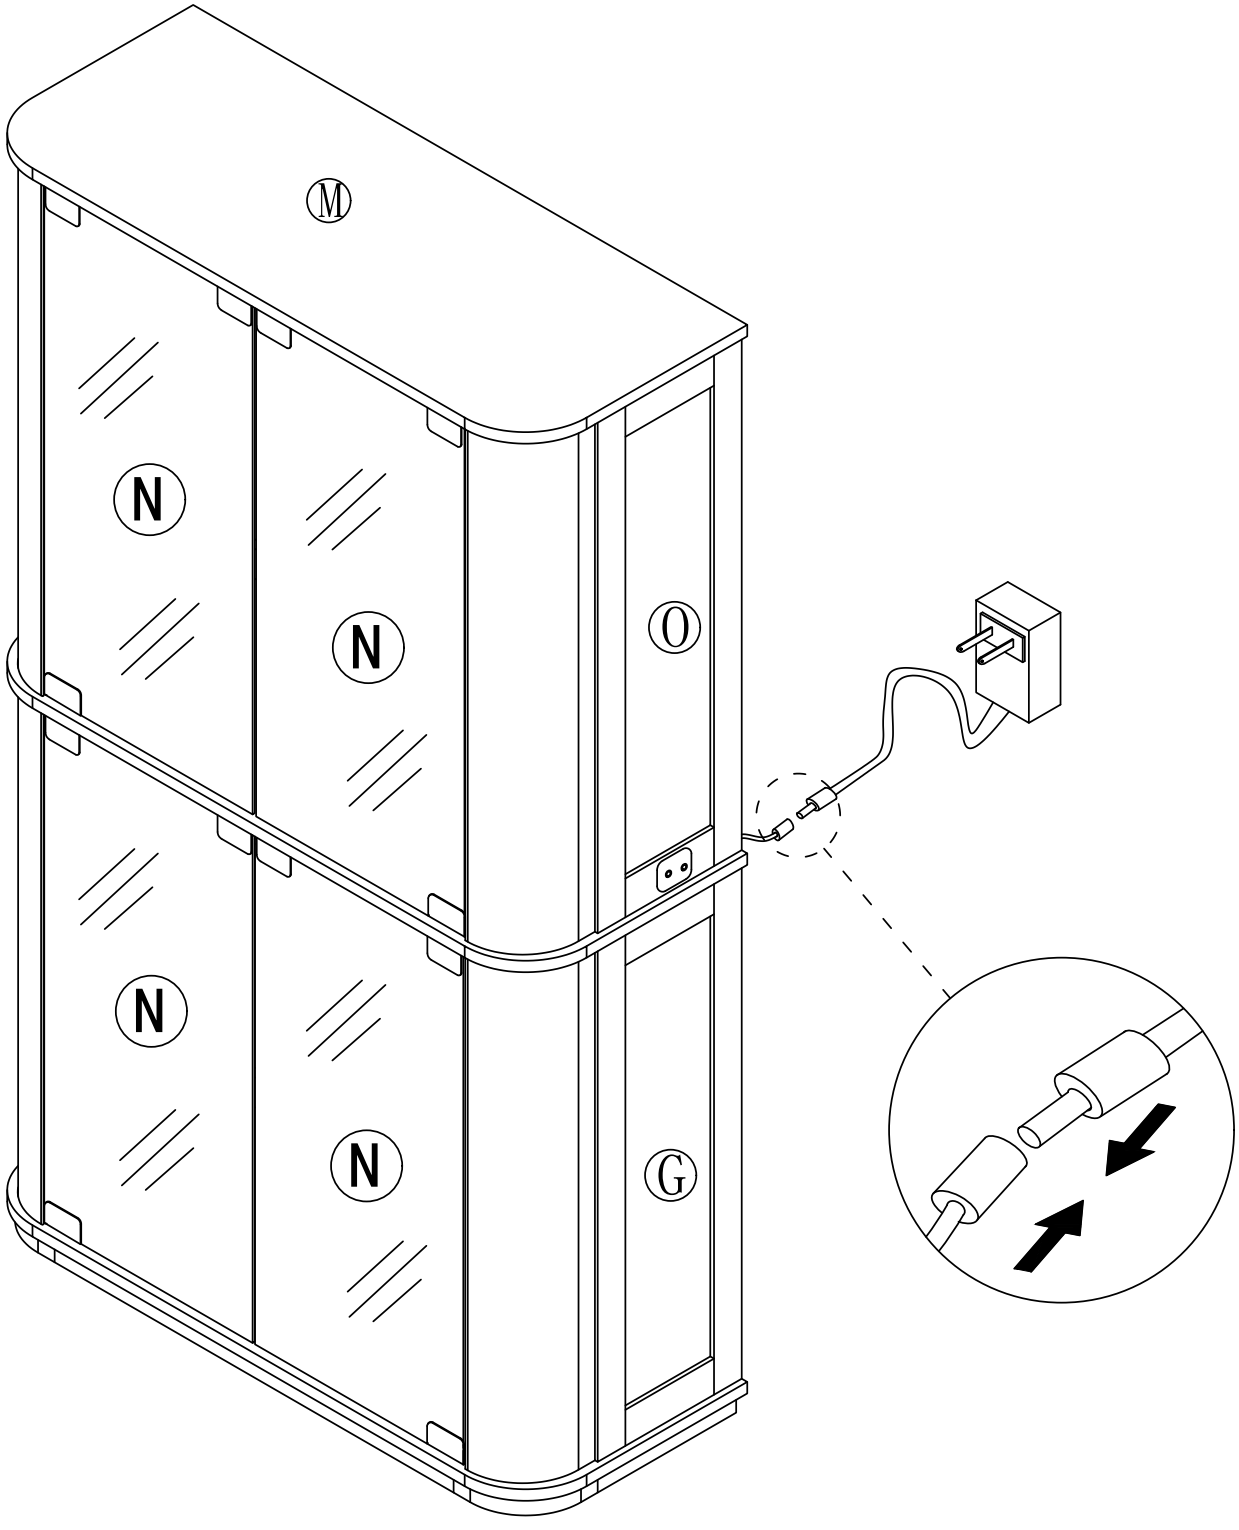

Step 39


9 x2 x2 x2






3.5x14mm


Install the anti fall hardware on the cabinet as shown in the picture first

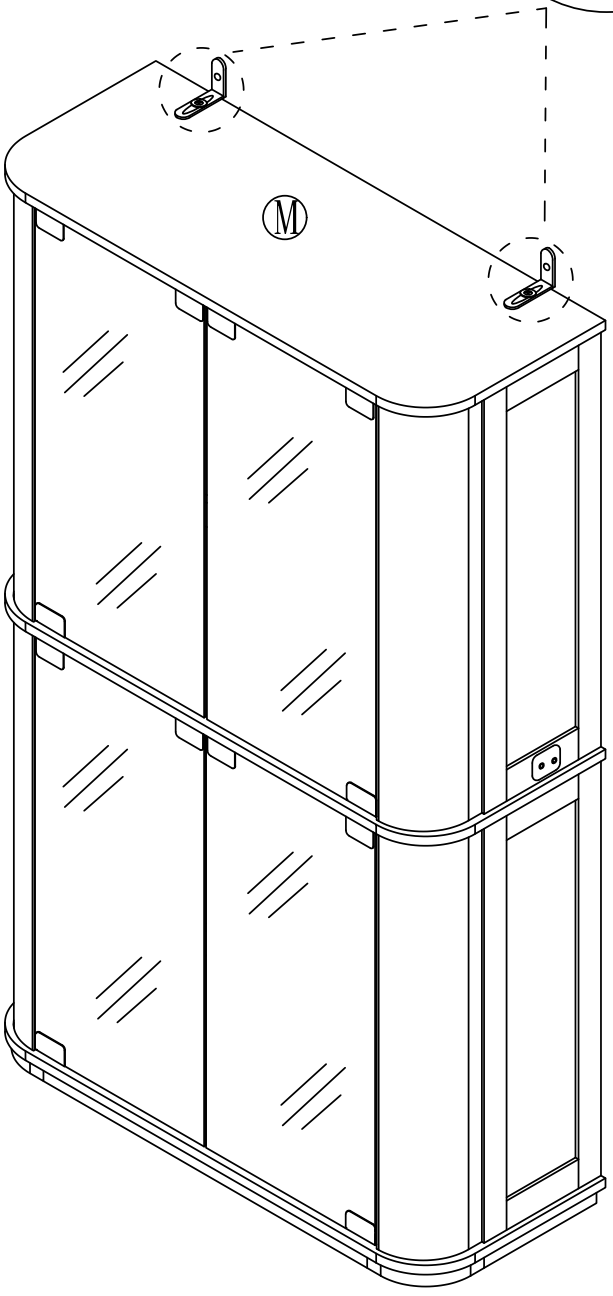

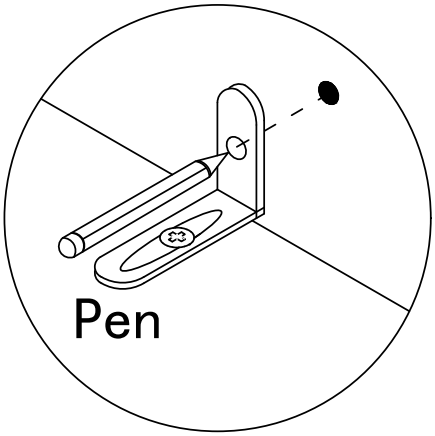

Then mark the wall with a pen through the holes in the anti-fall hardware


Step 40

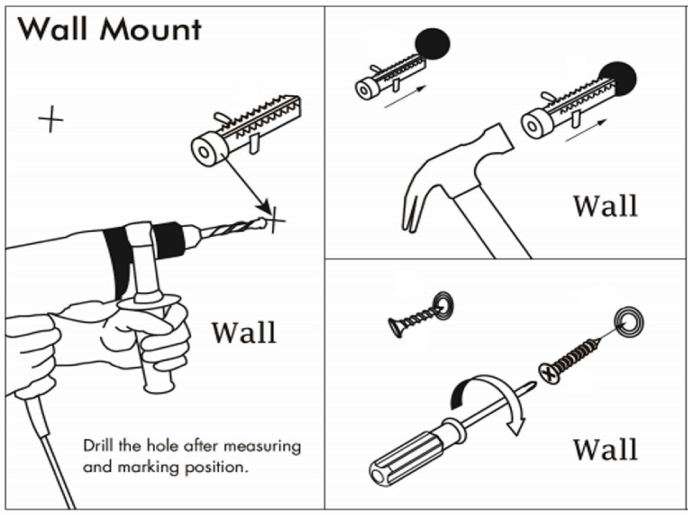


9 x2


x2 x2

Drill the hole with an electric drill and punch in the colloidal particles

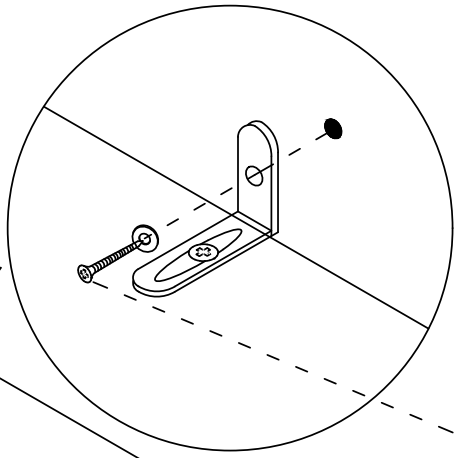

4x45mm



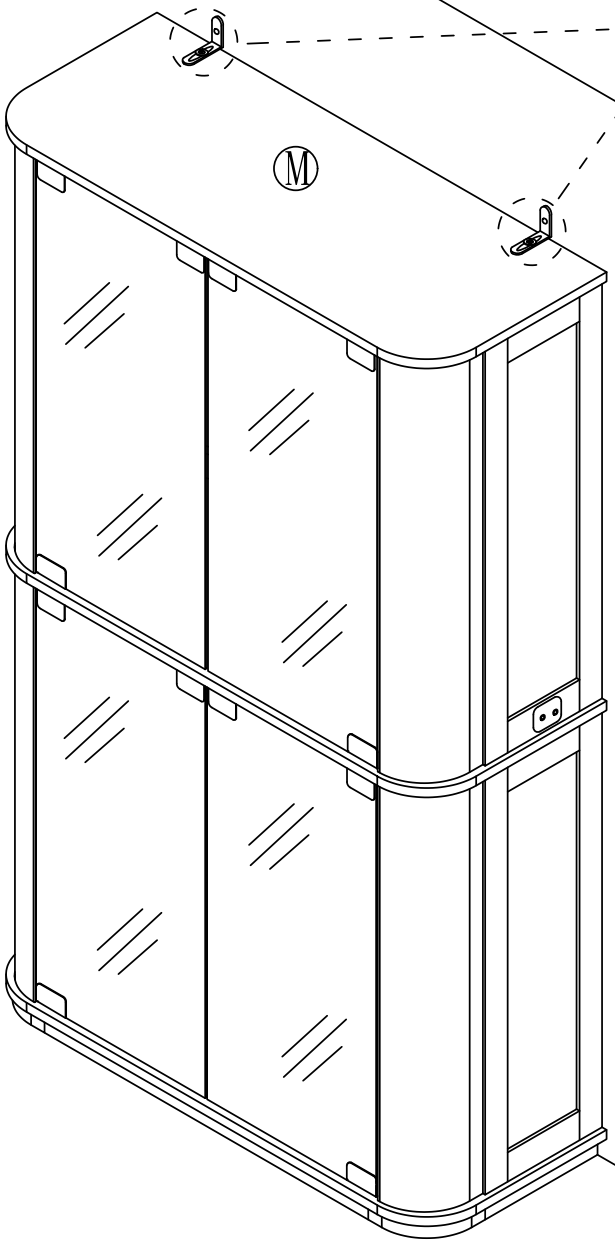

wall

Fasten the cabinet to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

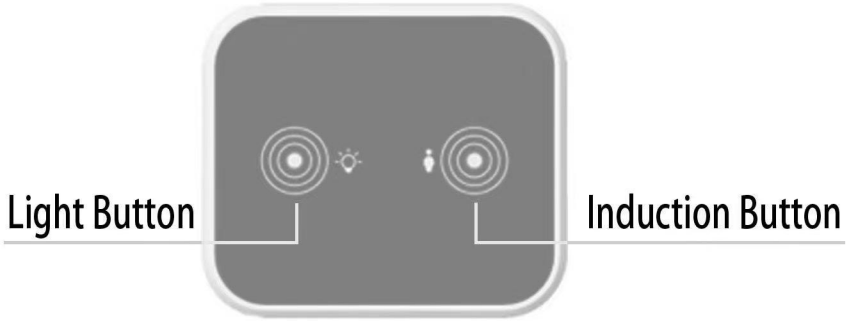

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.