



## Product installation steps

1

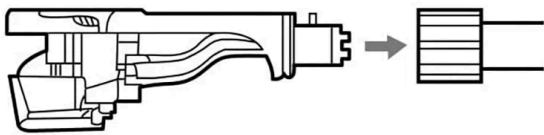


With the turntable turned off and the AC adapter unplugged from the outlet, release the headshell from the tonearm.

2

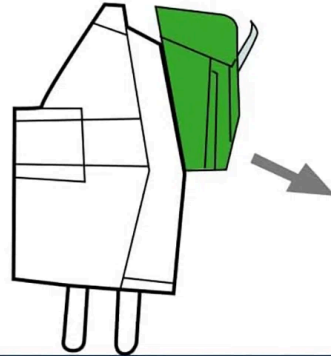


Remove the stylus downwards

3

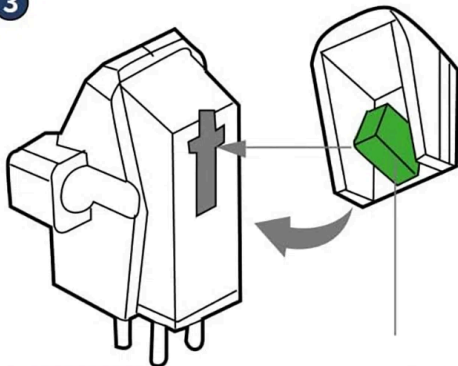

Align the position of the inner protrusion

4

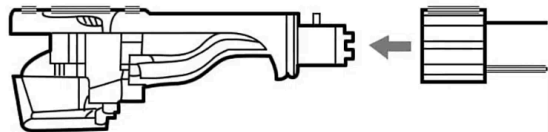

Mount the headshell onto the tonearm.