
ASSEMBLY GUIDE



THIS INSTRUCTION BOOKLET CONTAINS IMPORTANT SAFTY INFORMATION, PLEASE READ AND KEEP FOR FUTURE REFERENCE.

PARTS IDENTIFICATION

- -Ensure that all parts and components are located before beginning assembly. Parts are labeled to help distinguish similar parts from each other. Use this PARTS IDENTIFICATION sheet to help identify similar parts.
- -Assemble on a soft surface to prevent damage to the product finish.
- -Two people are needed for assembly.
- -Estimated assembly time is approximately 2.5 hours.

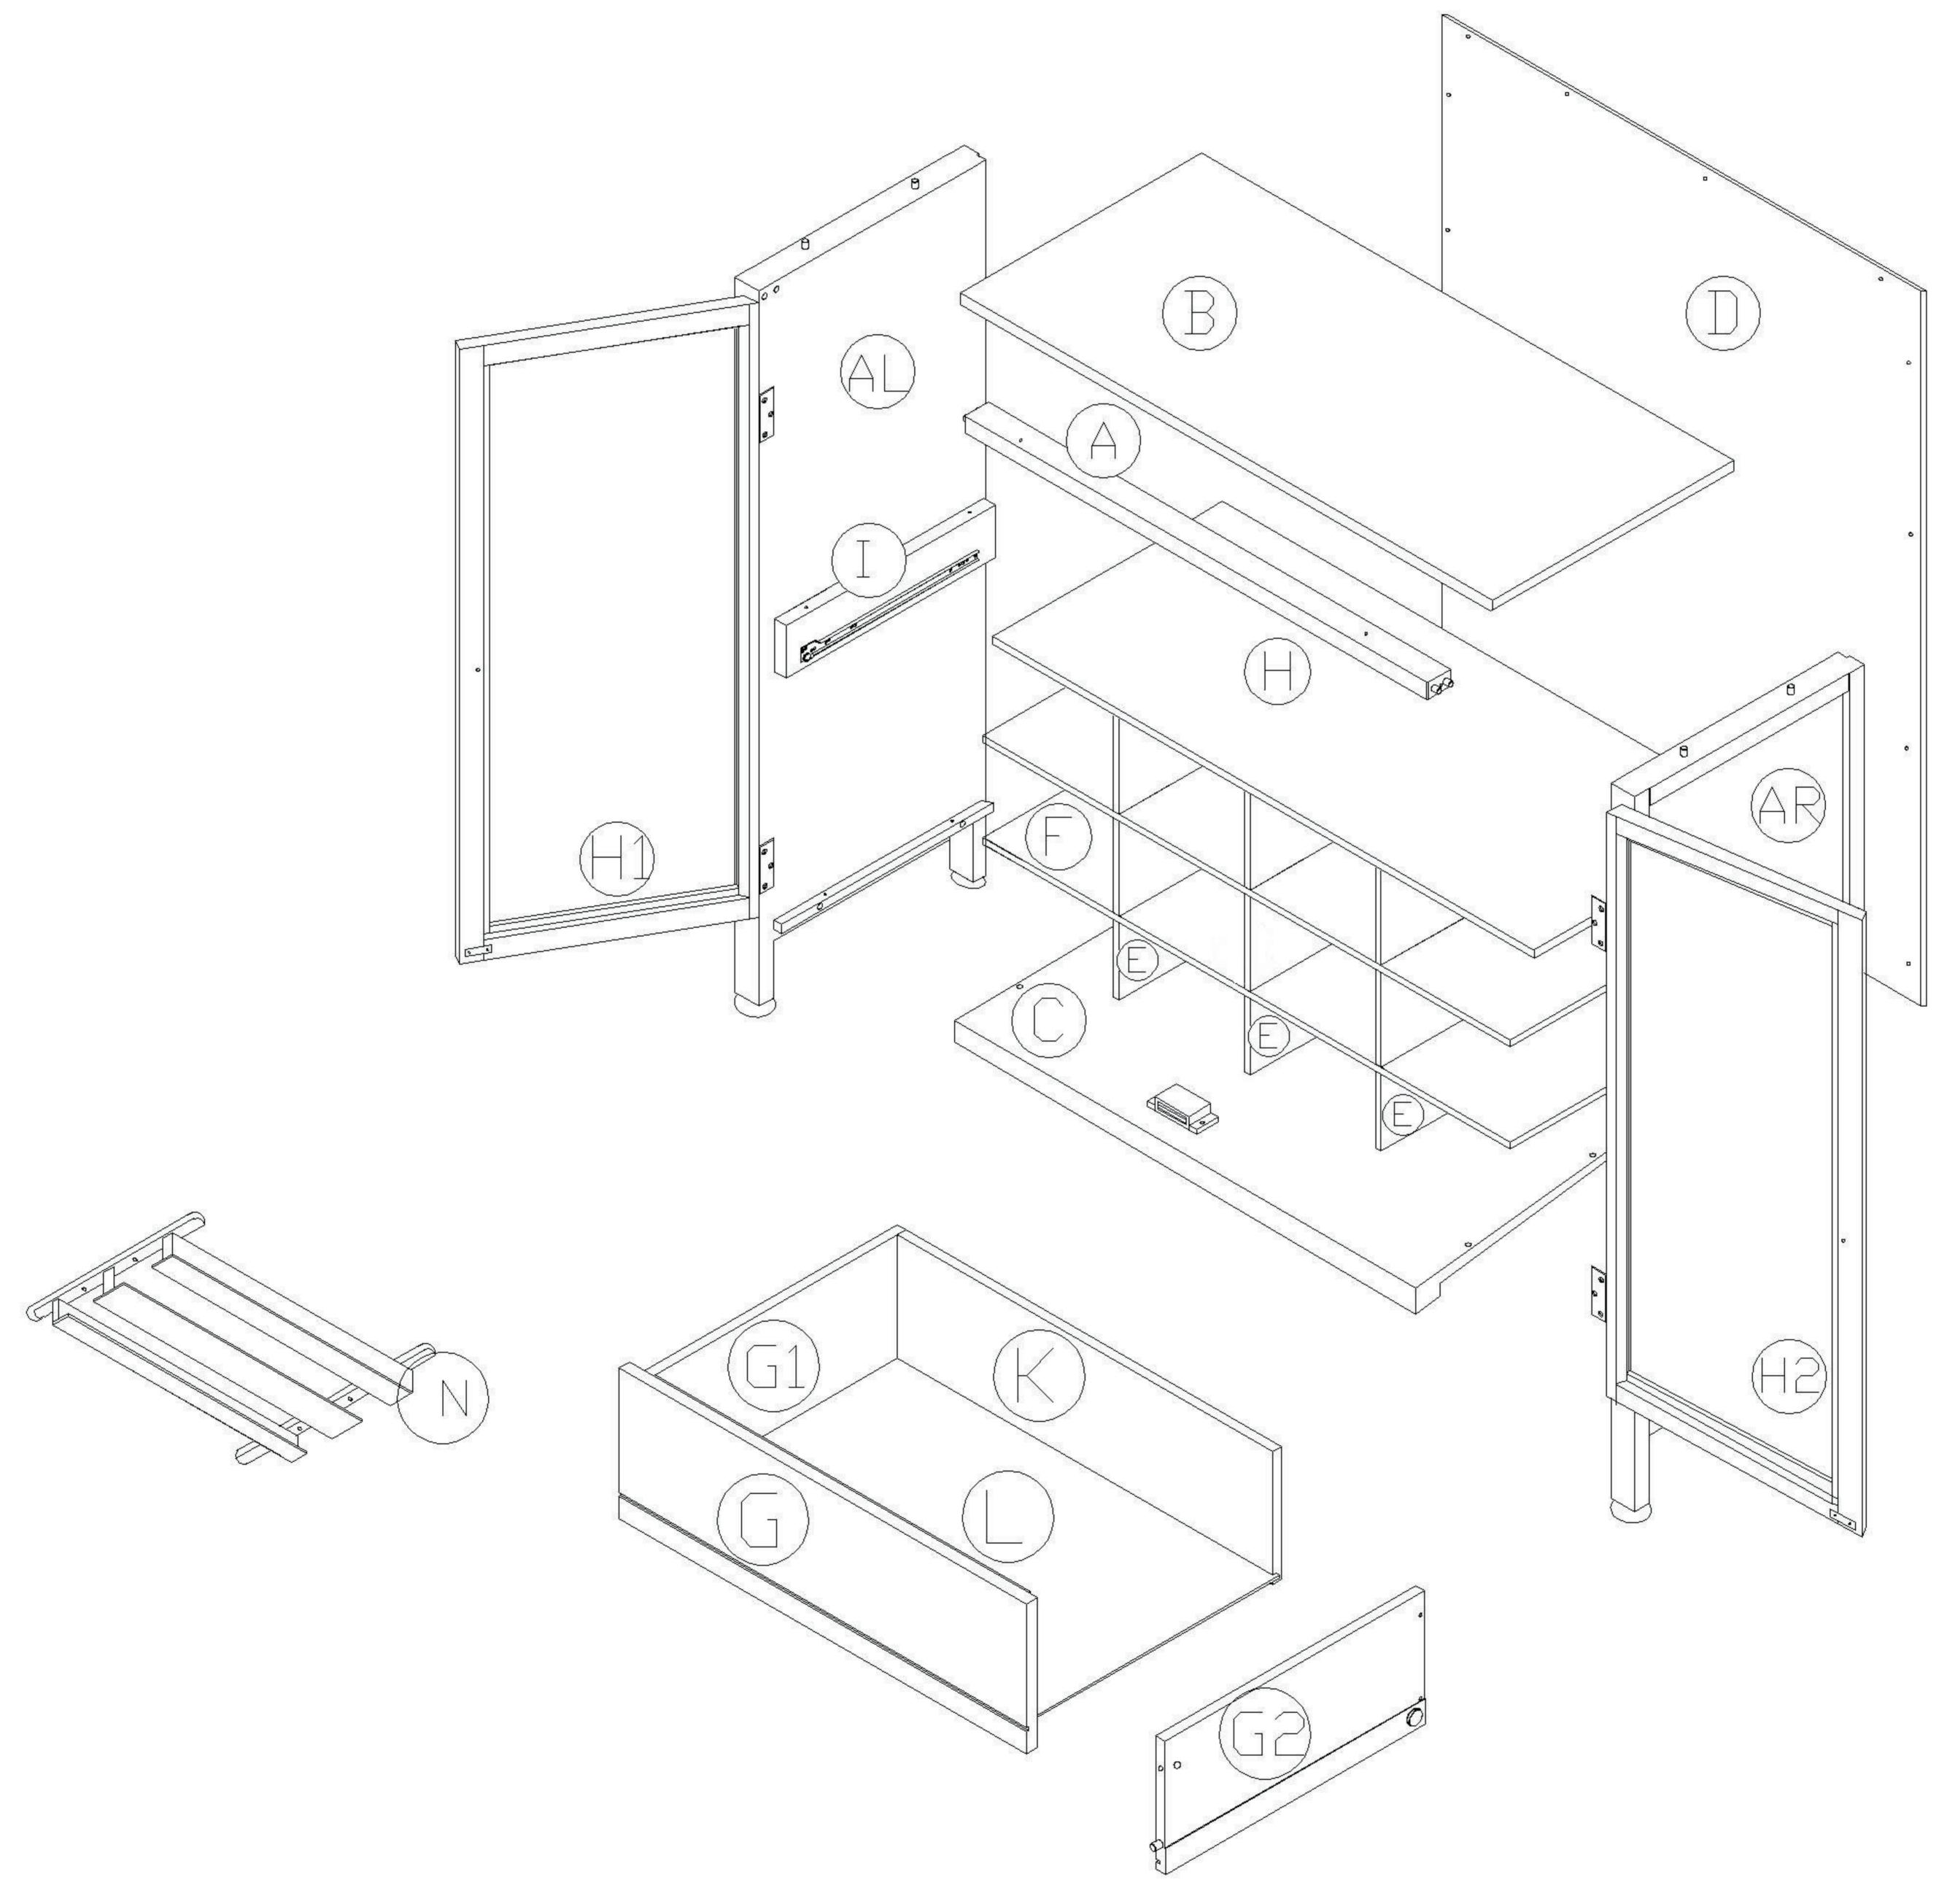


(AL)SIDE PANEL:1pc (AR)SIDE PANEL:1pc (A)BAR:1pc (B)COVER BOARD:1pc (C)BOTTOM BOARD:1pc (D)BACK PANEL:1pc (E)BOARD:2pcs


(F) BOARD: 2pcs (G) DRAWER FRONT PANEL: 1pc (G1) DRAWER SIDE PANEL: 1pc (G2) DRAWER SIDE PANEL: 1pc (II) SHELF: 1pc (N) RAIL: 1pc


(K) DRAWER BACK PANEL:1pc (L) DRAWER BOTTOM PANEL:1pc (M) BOARD:1pc (II1) DOOR:1pc(II2) DOOR:1pc (I) BOARD:1PC (J) BOARD:1PC

HARDWARE IDENTIFICATION

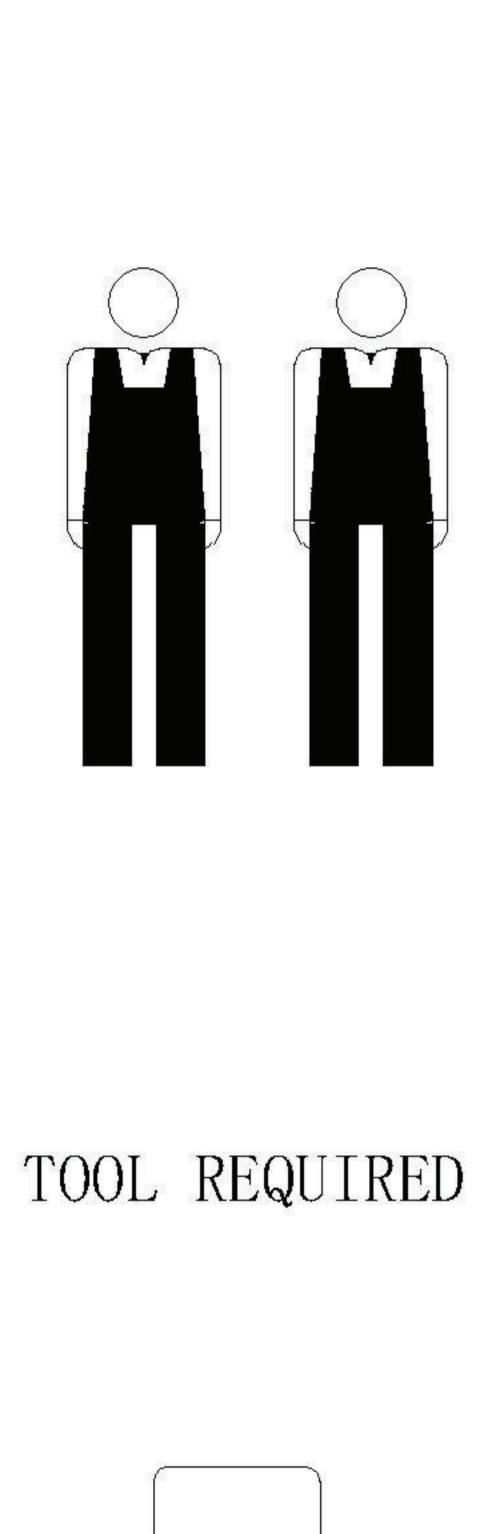



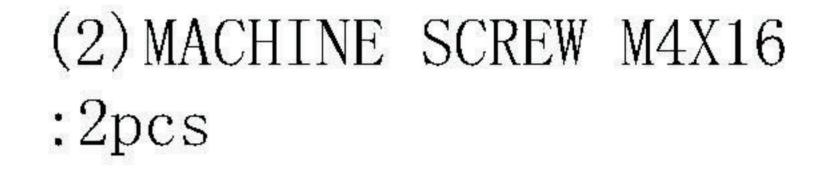


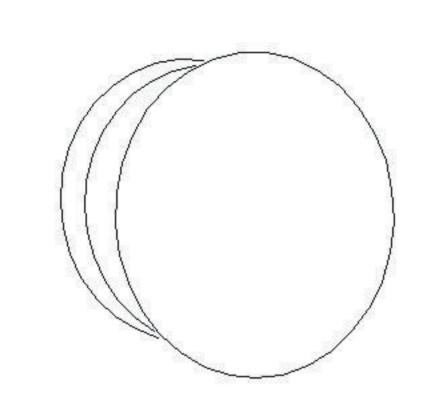

(3) FLAT HEAD SCREW ST2. 5X12:30pcs




(4) FLAT HEAD SCREW ST4X25:22pcs

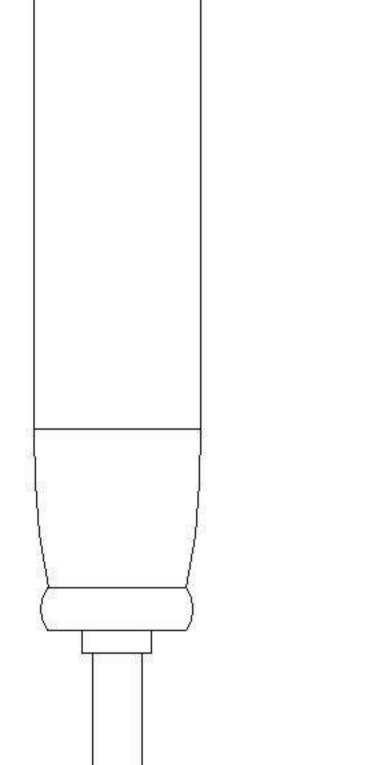



(5) CAM BOLT: 2pcs




(6) CAM LOCK: 2pcs

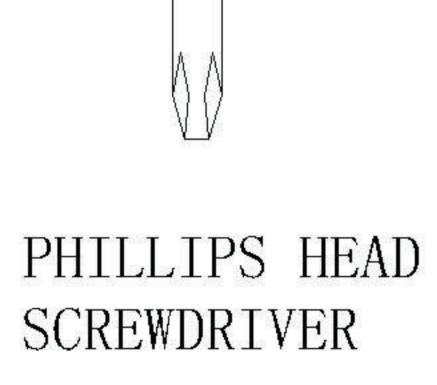

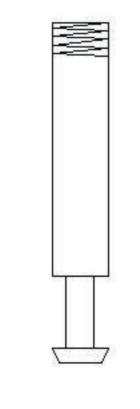





CAM LOCK SYSTEM

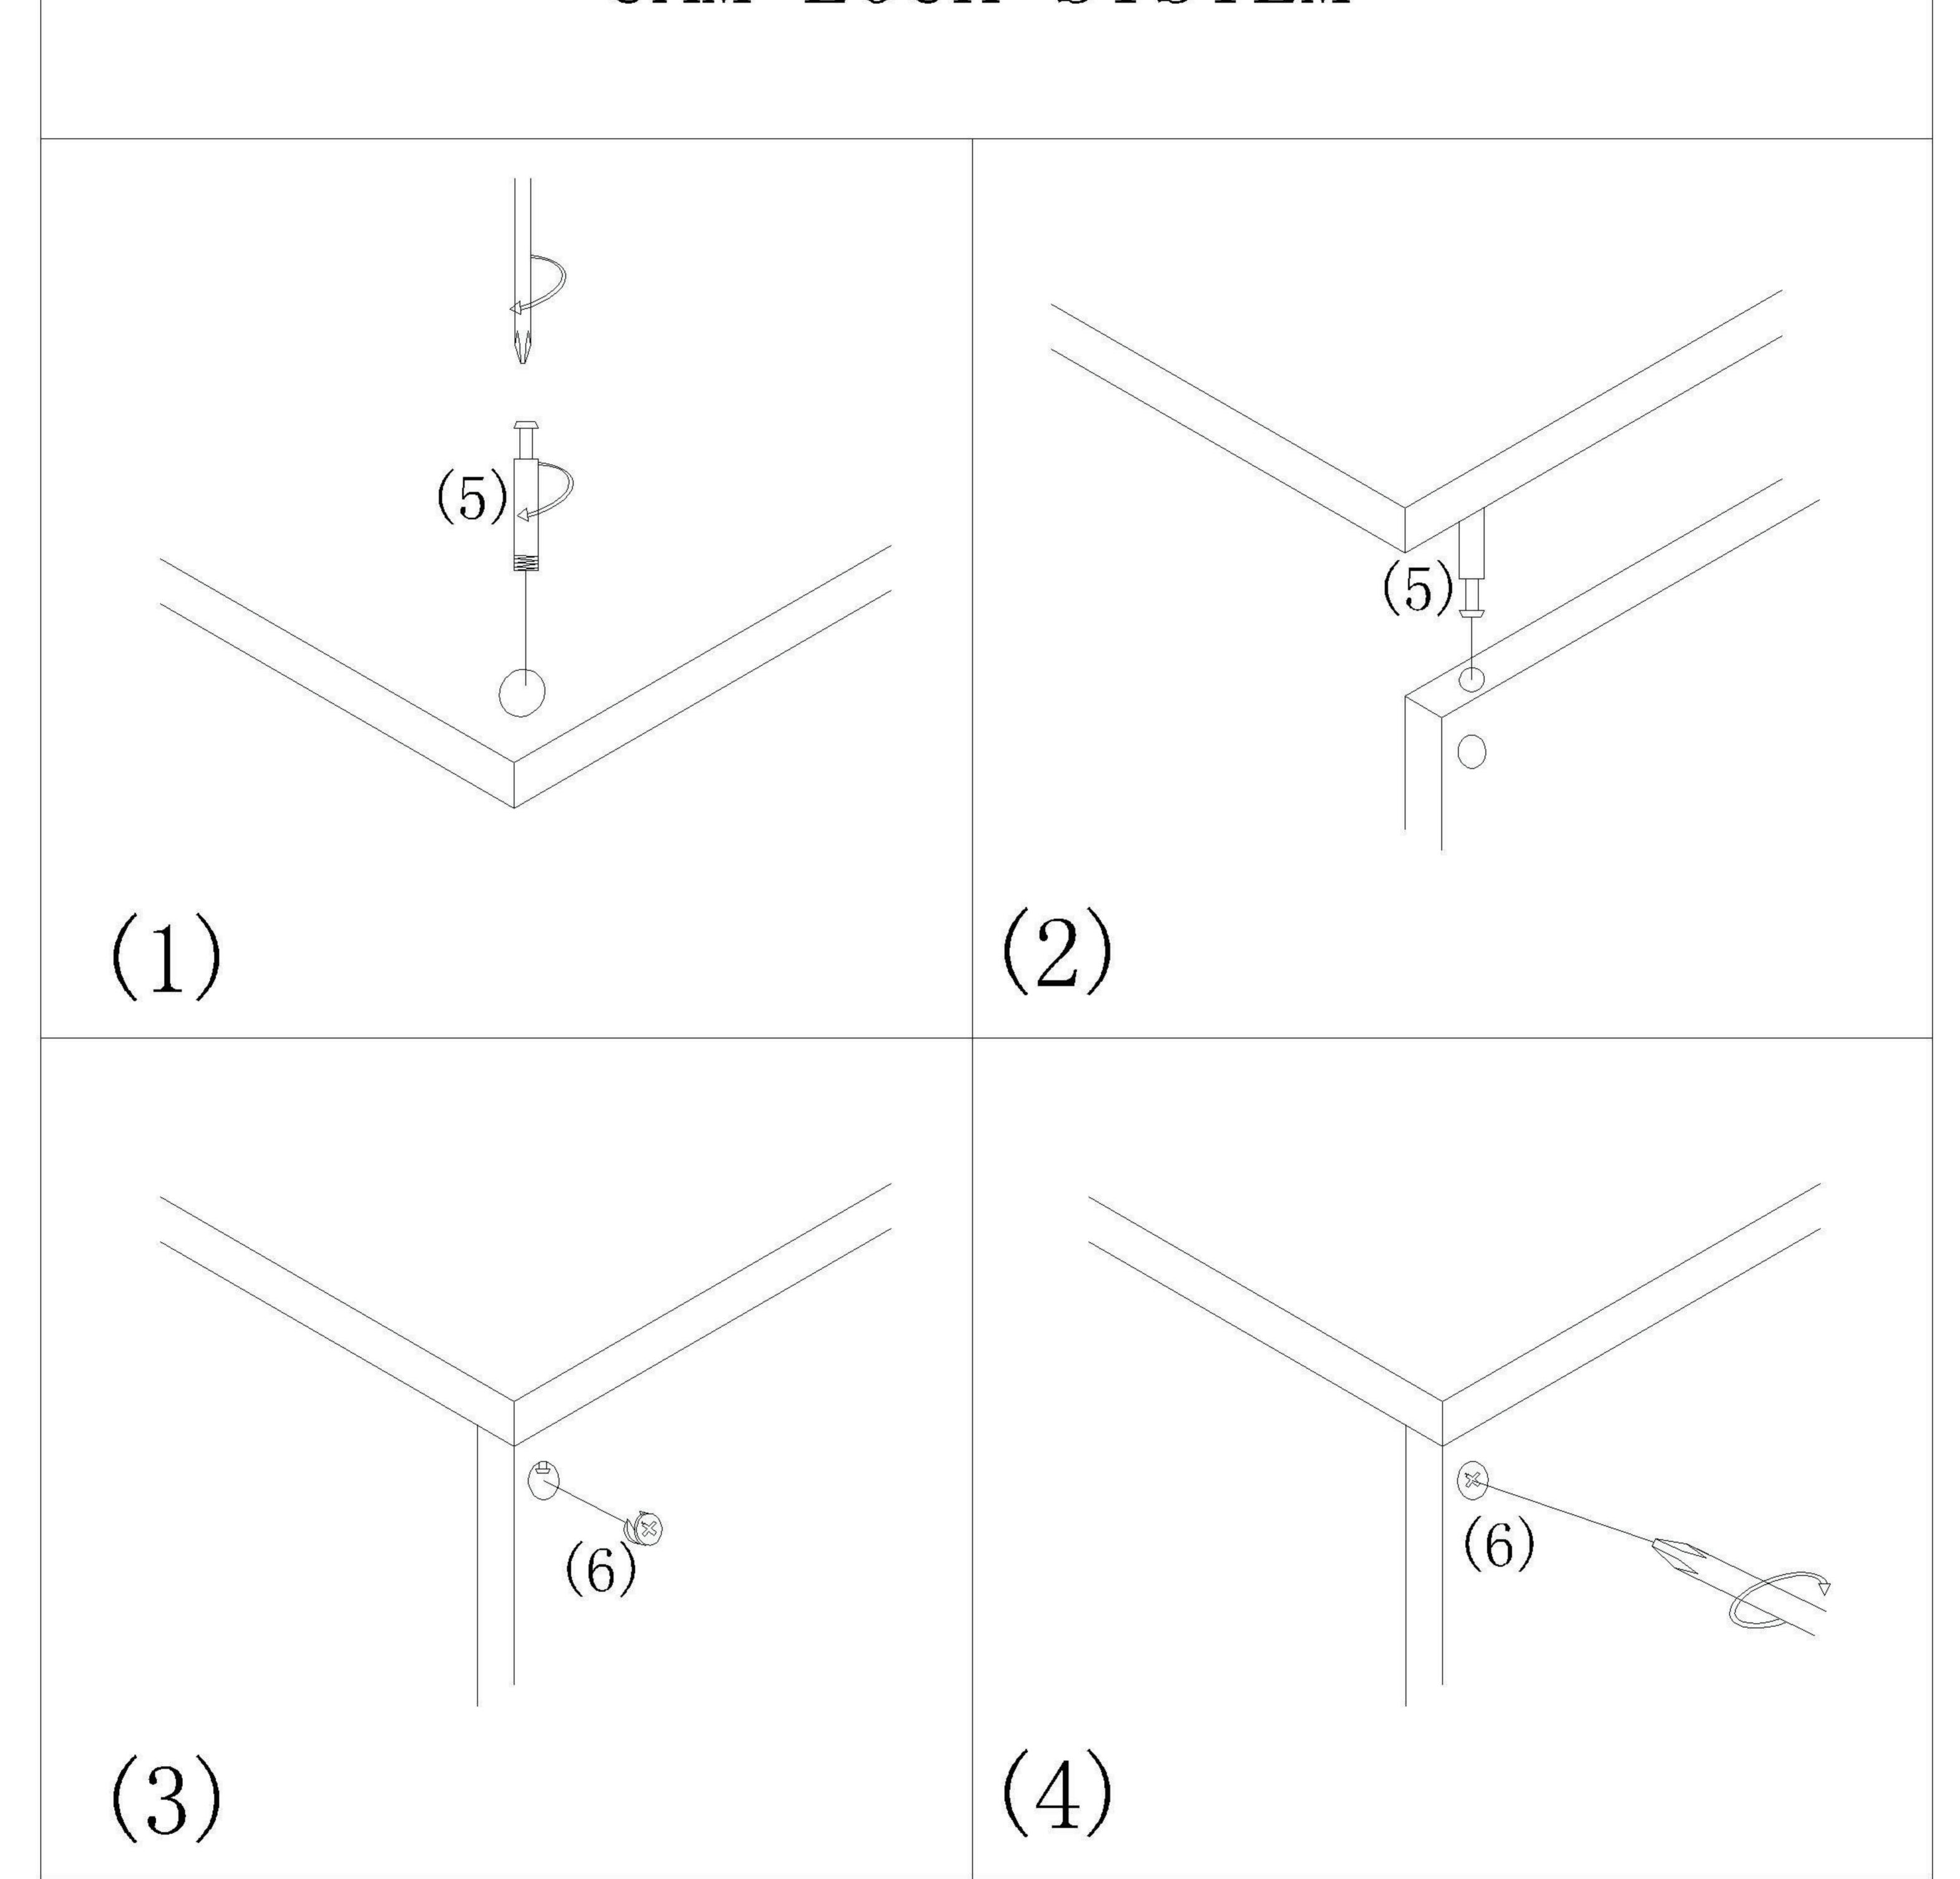

Ensure parts of cabinet connect securely, adjust cam bolt by pushing or pulling during assembly.

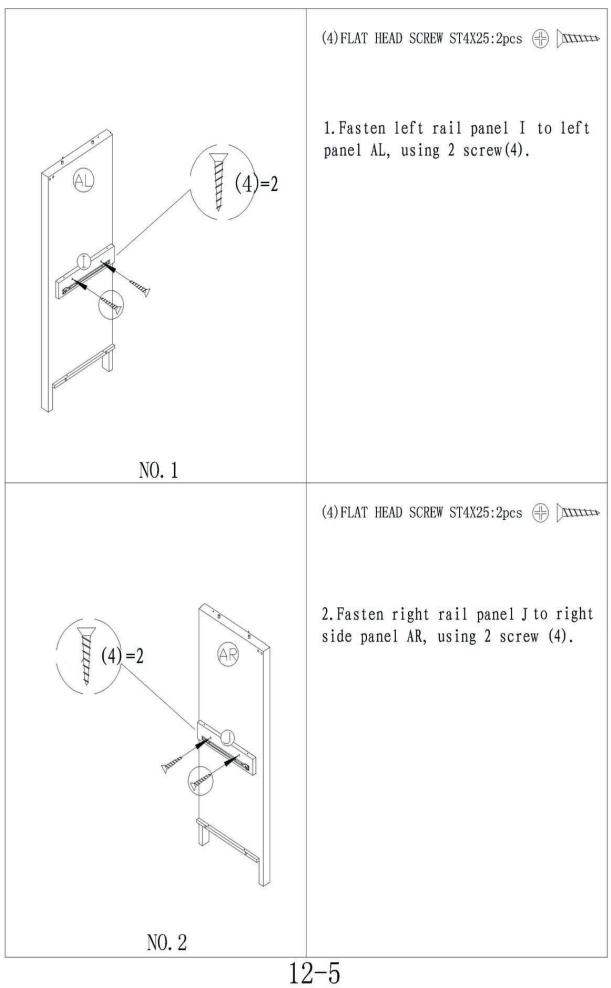

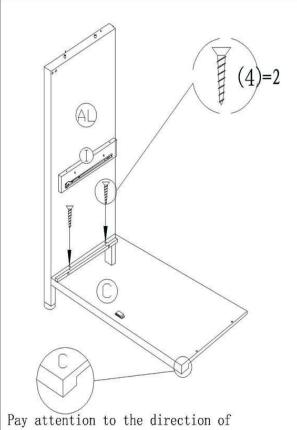


(4) FLAT HEAD SCREW ST4X25:2pcs 🛞 🕮

3. Fasten bottom board C to left side panel AL, using 2 screw (4).


Pay attention to the direction of board C.

NO. 3

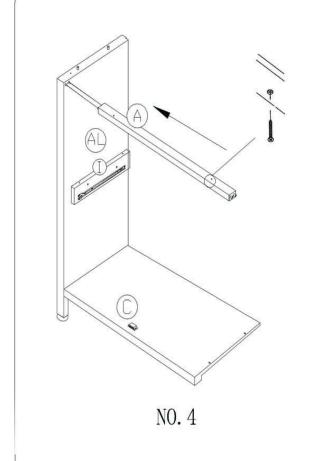


4. Insert bar A to side panel AL.

Note: The bigger screw holes on the bar shoud face down.

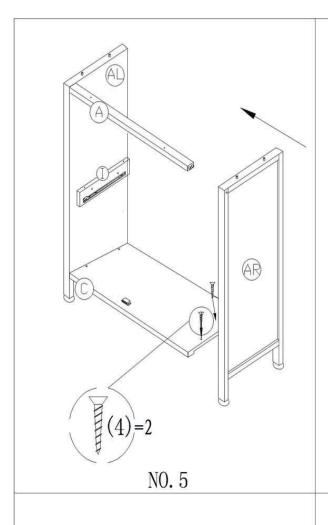


(4) FLAT HEAD SCREW ST4X25:2pcs 🕀 🛝


5. Insert bar A to the right side panel AR, fasten bottom board C to side panel AR, using 2 screw (4).

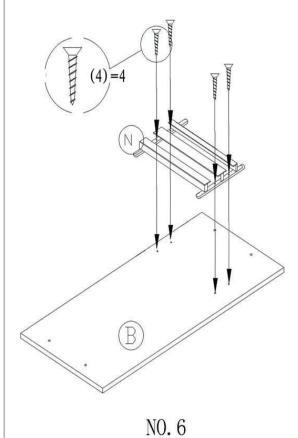


(4) FLAT HEAD SCREW ST4X25:4pcs 🕀 🖾 🖽

6. Fasten rail N to cover board B, using 4 screw (4).

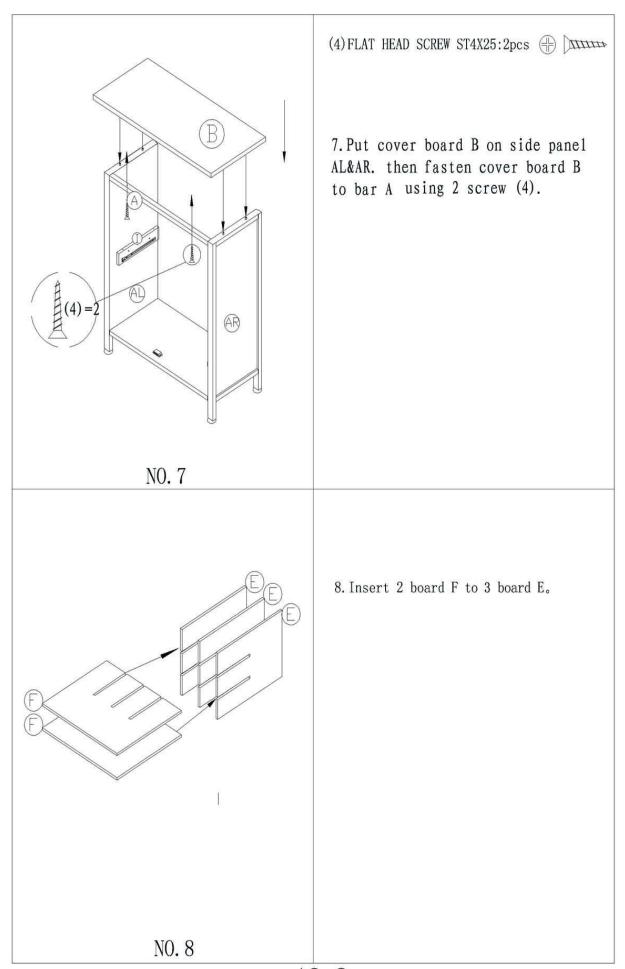

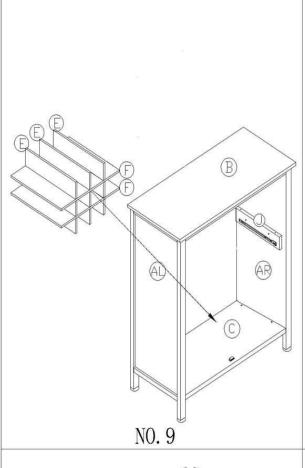

9. Put E, F on bottom board C from the back of the cabinet.

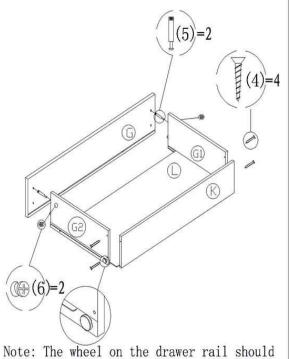

(4) FLAT HEAD SCREW ST4X25:4pcs (5) CAM BOLT:2pcs (6) CAM BOLT:2pcs

(6) CAM LOCK: 2pcs

10.a) Screw 2 cam bolt (5) to drawer front panel G.


b) Insert cam bolt (5) to the drawer side panel G1 & G2, then insert 2 cam lock (6) in the holes on side panel G1 & G2, turn them clockwise until locked tightly.

c) Slide drawer bottom panel L into place.


d) Fastendrawer back panel K to side panel G1 & G2, using 4 screw(4).

NO. 10

be near to back panel K.

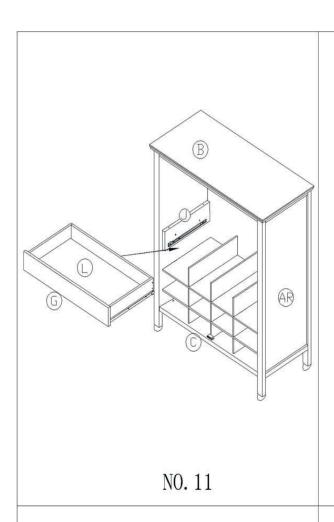


11. Slide drawer into place.

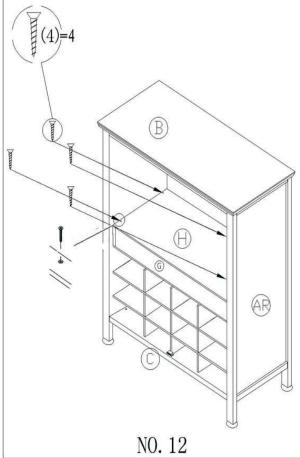

(4) FLAT HEAD SCREW ST4X25:4pcs (4) Dittime

12. Put shelf H on board I & J, fasten shelf H to board I & J using 4 screw (4).

Note: The bigger screw holes on the shelf should face up.

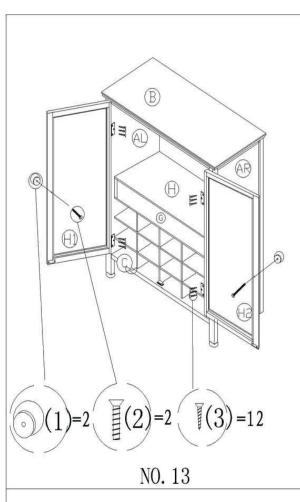


- (3) FLAT HEAD SCREW ST2. 5X12:12pcs 🕀 Datum
- (2) MACHINE SCREW M4X16:2pcs (+)
- (1) DOOR KNOB :2pcs



13. Fasten door H1&H2 to side panel AL & AR, using 12 screw (3). Fasten 2 door knob (1) to door H1 & H2, using 2 screw (2).

Note:Do not fully tighten the screws until all the screws have been attached.

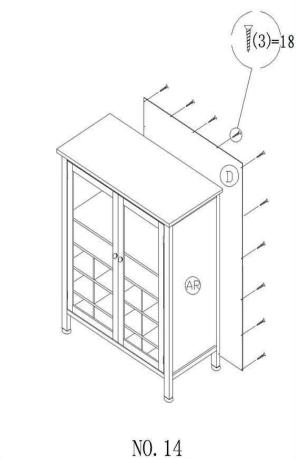

(3) FLAT HEAD SCREW ST2. 5X12:18pcs

14 Fasten back panel D to cover board B, side panel AL & AR, bottom board C, using 18 screw (3).

Note:Do not fully tighten the screws until all the screws have been attached.

CUSTOMER CARE INFORMATION

To maintain the appearance of the cabinet, we recommend the following:

- a) In order to ensure that your cabinet is stable adjust the levelers under your cabinet.
- b)Clean with a soft cloth or duster.
- c)Do not use abrasive cleaners as this may damage the finish.
- d)Do not use wax furniture polish.
- e)Clean glass or mirror using a damp cloth with soft soap.

Do not use washing powders or any substance containing abrasives since these substances will scratch the glass.

