

NOTICE

*Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.

*This item should be assembled on a soft surface to prevent scratching the finish during assembly.

*This item may require periodic tightening.

*If you are having difficulty, our friendly Customer Care team is always here to help.

PREPARATION

*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 60 minutes.

*Tools Required for Assembly (included): Allen Key


CARE AND MAINTENANCE

Always use felt pads under all articles to prevent discoloration or softening of the lacquer. Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from scratches and spills. How often you apply the wax depends on how much wear the furniture receives.

Part List

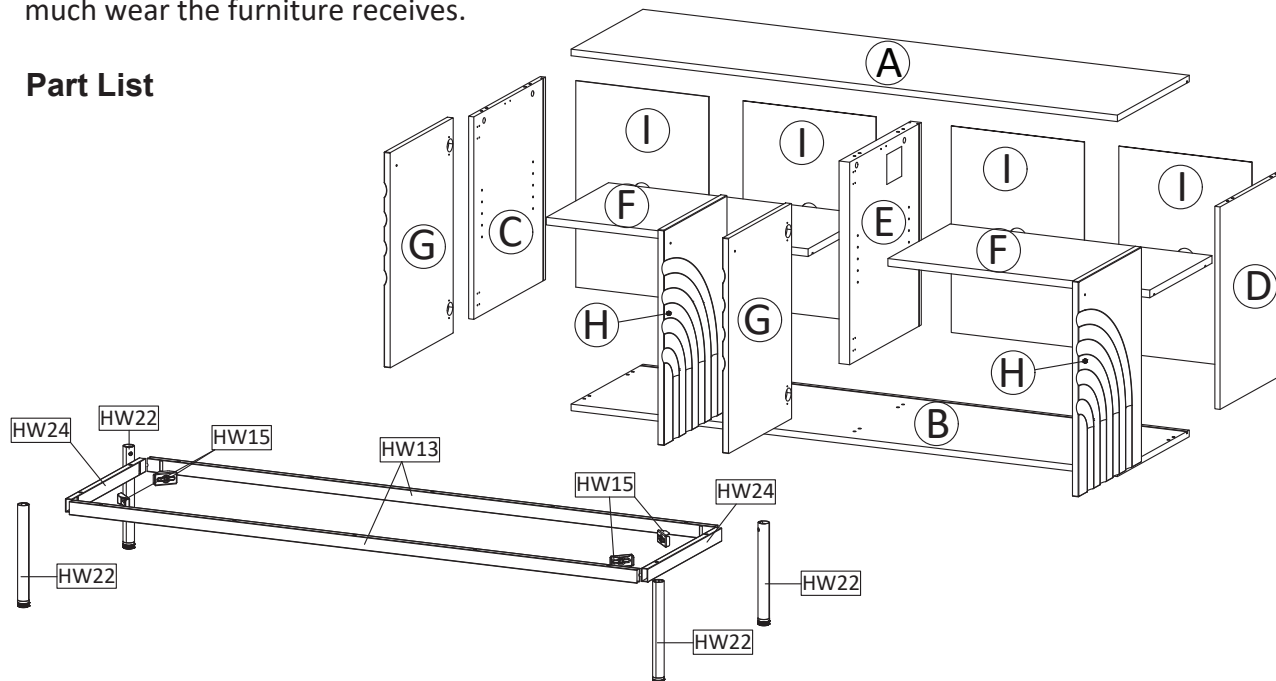

Product Dimensions: 63"Wx18"Dx32"H

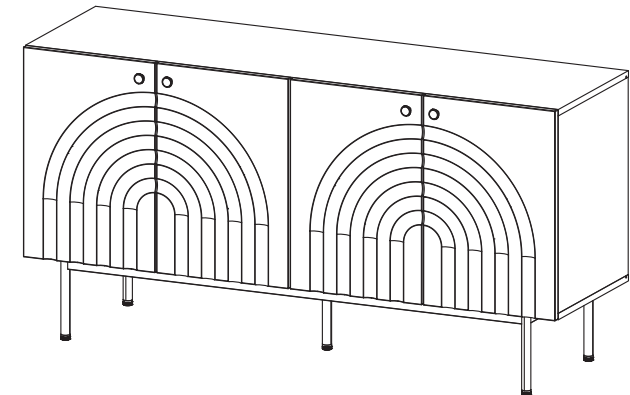




























WARNING :

WEIGHT CAPACITY: 104 LBS.

Warning : Do not stand on media stand.

Warning : Do not over torque bolts.

Hardware List

<p>HW1x6</p>  <p>∅ 6 x 35 mm</p>	<p>HW2x6</p>  <p>∅ 15 mm</p>	<p>HW3x12</p>  <p>∅ 8 x 30 mm</p>	<p>HW4x6</p>  <p>M 7 x 50 mm</p>	<p>HW5x52</p>  <p>M 4.5 x 12.5 mm</p>
<p>HW6x14</p>  <p>M 6.4 x 45 mm</p>	<p>HW7x4</p>  <p>M 6 x 40 mm</p>	<p>HW8x4</p>  <p>M 4 x 25 mm</p>	<p>HW9x8</p>  <p>M 6 x 10.5 mm</p>	<p>HW10x20</p> 
<p>HW11x8</p> 	<p>HW12x20</p>  <p>M 3.5 x 15.5 mm</p>	<p>HW13x2</p> 	<p>HW14x4</p> 	<p>HW15x4</p> 
<p>HW16x2</p> 	<p>HW17x4</p>  <p>∅ 15 mm</p>	<p>HW18x2</p>  <p>∅ 15 mm</p>	<p>HW19x2</p> 	<p>HW20x4</p> 
<p>HW21x4</p> 	<p>HW22x4</p> 	<p>HW23x4</p> 	<p>HW24x2</p> 	<p>HW ST765x2</p> 
<p>HW HS26Ax8</p> 	<p>HW LM23A1x1</p> 			

Part List & HW For Multi-Box Items

Piece	Description	Qty	Carton Call
A	Top Board	1	1 of 2
B	Bottom Board	1	1 of 2
C	Side Board Left	1	1 of 2
D	Side Board Right	1	1 of 2
E	Center Board	1	2 of 2
F	Adjustable Shelf	2	1 of 2
G	Wooden Door Left	2	2 of 2
H	Wooden Door Right	2	2 of 2
I	Back Board	4	2 of 2

Piece	Description	Qty	Carton Call
HW1	Cambolt	6	1 of 2
HW2	CamLock	6	1 of 2
HW3	Dowel	12	1 of 2
HW4	Screw M 7 x 50 mm	6	1 of 2
HW5	Screw M 4.5 x 12.5 mm	52	1 of 2
HW6	Screw M 6.4 x 45 mm	14	1 of 2
HW7	Screw M 6 x 40 mm	4	1 of 2
HW8	Screw M 4 x 25 mm	4	1 of 2
HW9	Screw M 6 x 10.5 mm	8	1 of 2
HW10	Wedge	20	1 of 2
HW11	Shelf Pin	8	1 of 2
HW12	Screw M 3.5 x 15.5 mm	20	1 of 2
HW13	Support Metal Leg 1	2	1 of 2
HW14	Support Corner Brace	4	1 of 2
HW15	Corner Brace	4	1 of 2
HW16	Allen Key	2	1 of 2
HW17	Screw Cap	4	1 of 2
HW18	Screw Cap	2	1 of 2
HW19	List Joint	2	1 of 2
HW20	Handle	4	1 of 2
HW21	Cable Hole Rubber	4	1 of 2
HW22	Leg	4	1 of 2
HW23	Bracket	4	1 of 2
HW24	Support Metal Leg 2	2	1 of 2
HW ST765	Anti Deflection Bar	2	1 of 2
HW HS26A	Hinge	8	2 of 2
HW LM23A1	Center Leg	1	2 of 2

PREPARATION


*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 60 minutes.

*Tools Required for Assembly (included): Allen Key


*If you are having difficulty, our friendly Customer Care team is always here to help.

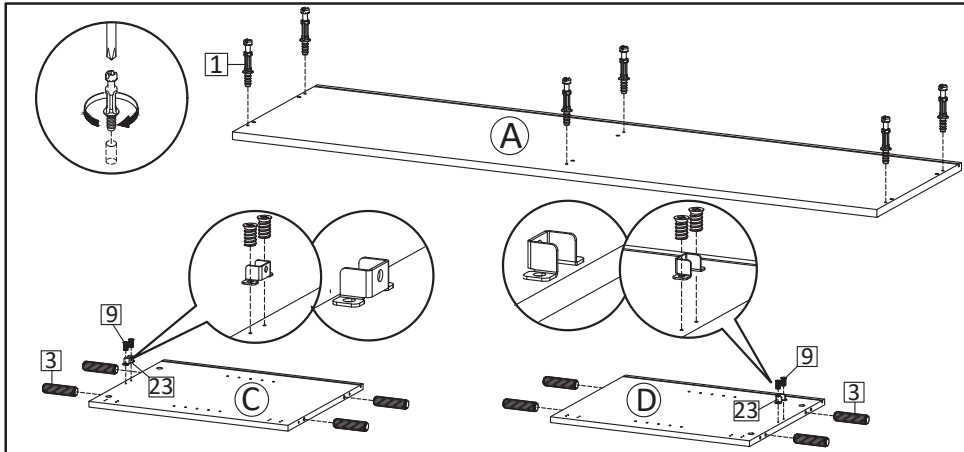


STEP1: Insert Cambolt (HW1) into Top Board (A) . Insert Dowel (HW3) into Side Board Left (C) and Side Board Right (D). Continue with securing part of the Bracket (HW23) into position as the above image, using screw M6x10.5mm (HW9).

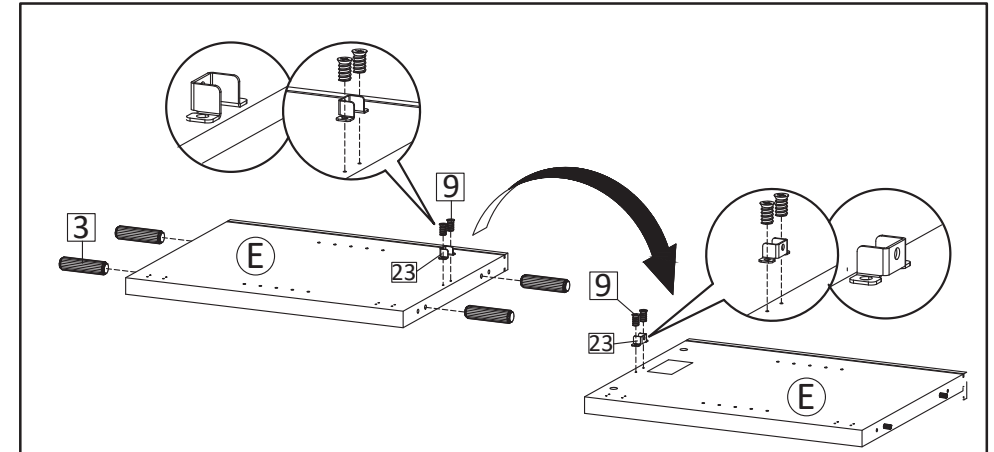

STEP2: Insert Dowel (HW3) into Center Board (E) Insert Bracket (HW23) into position as the above image, using screw M6x10.5mm (HW9). Then flip the board to access the opposite surface, continue Insert Bracket (HW23) secure with screw M6x10.5mm (HW9).

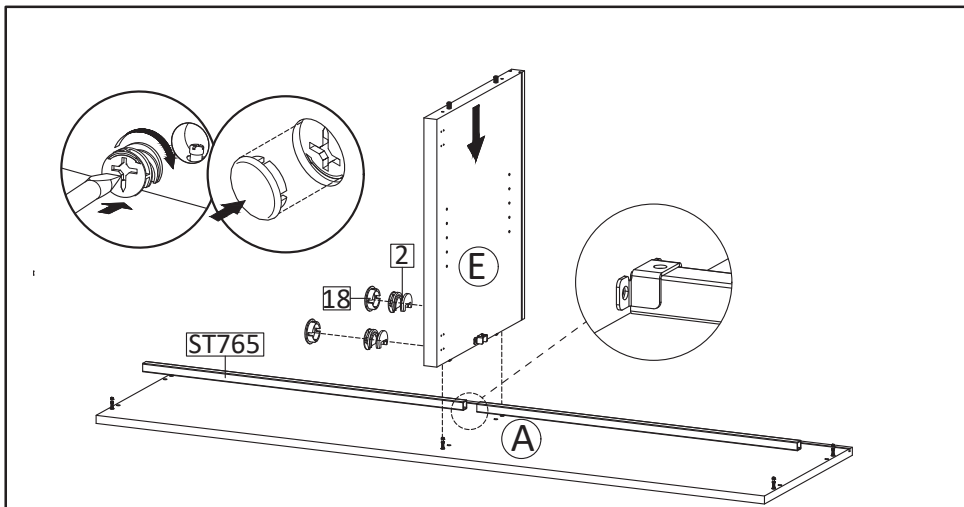

STEP3: Place Anti Deflection Bar (HW ST765) on Top Board (A) as figure. Attach Center Board (E), while ensuring position of both Anti Deflection Bars have been inserted to the Bracket (see figure). Insert Camlock and tighten using screwdriver. Put Screw Cap (HW17) over the camlock.

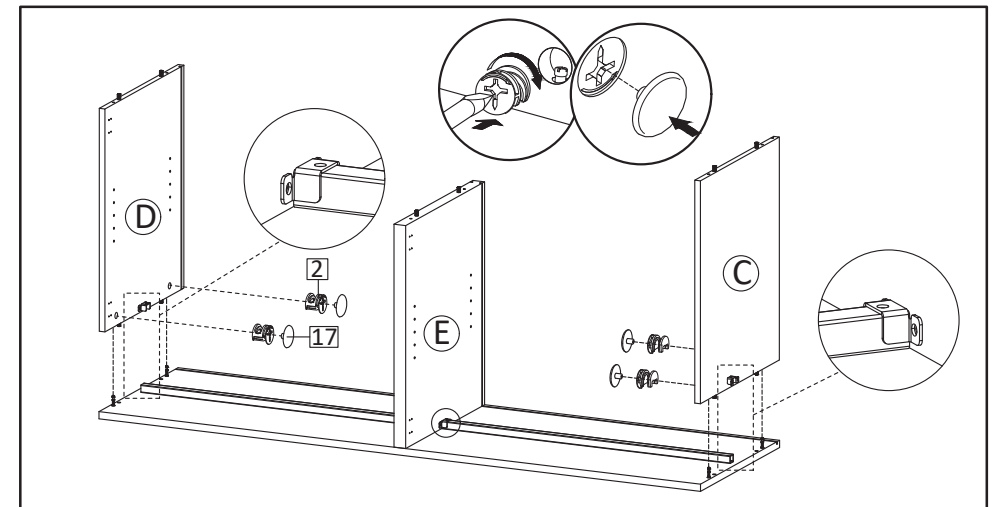

STEP4: Attach Side Boards (C&D) into Top Board (A) while ensuring end of the Anti Deflection Bars are being inserted properly into the bracket. Insert Camlock (HW2) then tighten using screwdriver. Put Screw Cap (HW17) over the camlock as picture.

PREPARATION


*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.


*Estimated Assembly Time: 60 minutes.

*Tools Required for Assembly (included): Allen Key


*If you are having difficulty, our friendly Customer Care team is always here to help.

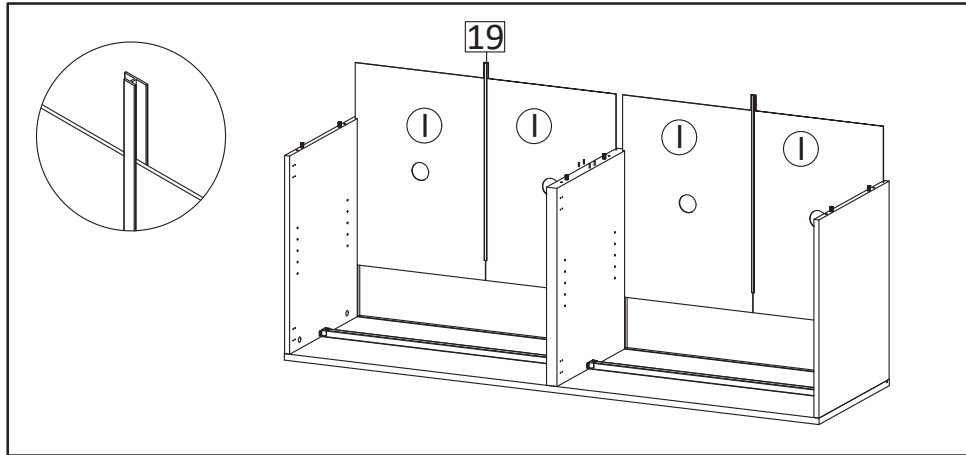


STEP5: Insert Back Boards (l) into Top Board. Insert List Joint (HW19) in between the back boards.

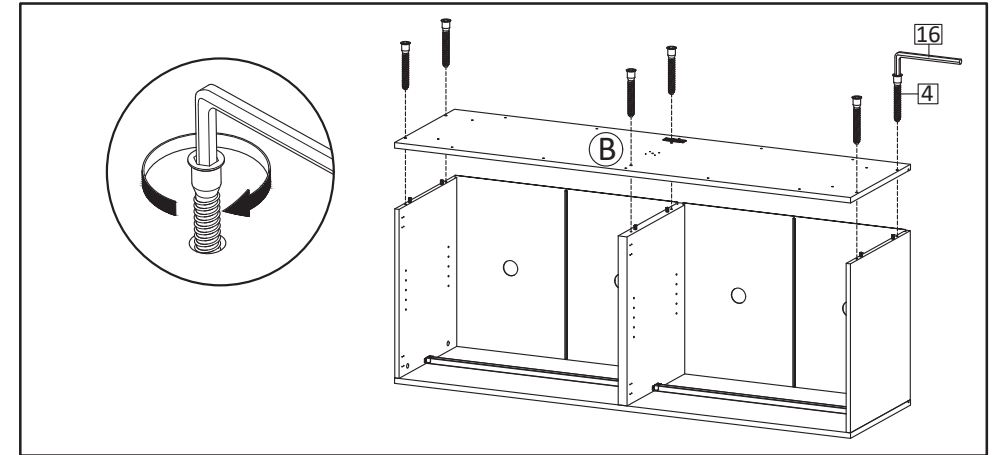

Step6: Insert Bottom Board (B) and secure with Screw M7x50 mm (HW4), tighten screws using Allen Key (HW16).

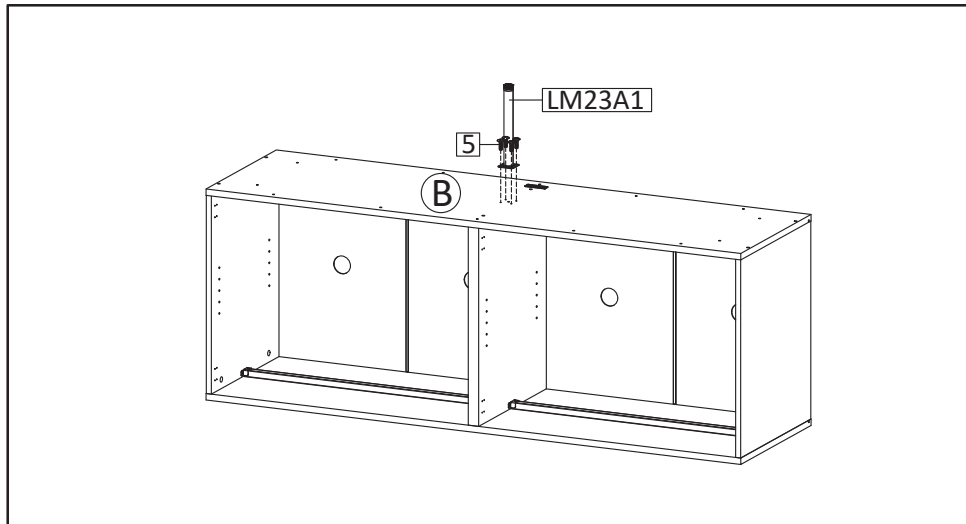


STEP7: Install Center Leg (HW LM23A1) into Bottom Board (B) then tighten secure with Screw M4.5x12.5mm (HW5) using screwdriver.

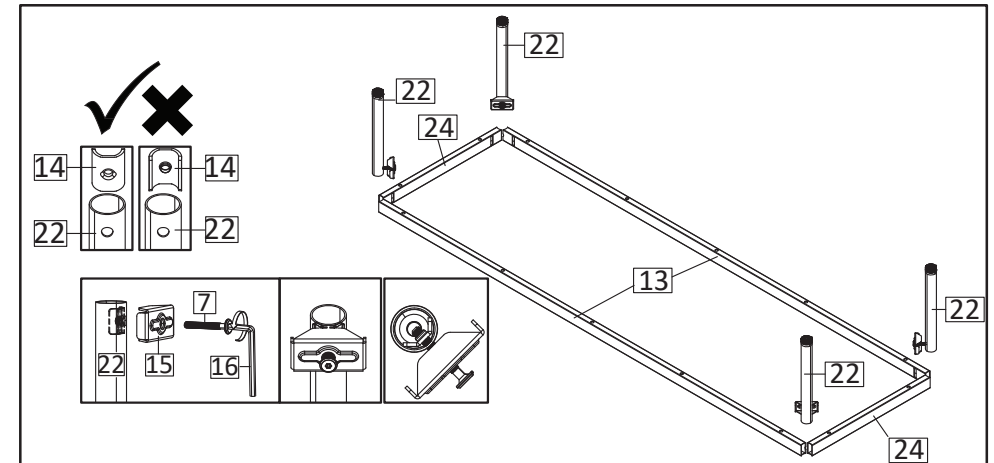


STEP8: Insert Support Corner Brace (HW14) and place it inside Leg (HW22) tube. Insert Screw (HW7) into the hole of Corner Brace (HW15). Screw in slightly just enough to grip Leg (HW22) with Support Corner Brace (HW14) inside. Do not tighten. Arrange Support Metal Leg 1 (HW13) & Support Metal Leg 2 (HW24) on the floor as per image.

PREPARATION


- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 60 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer Care team is always here to help.

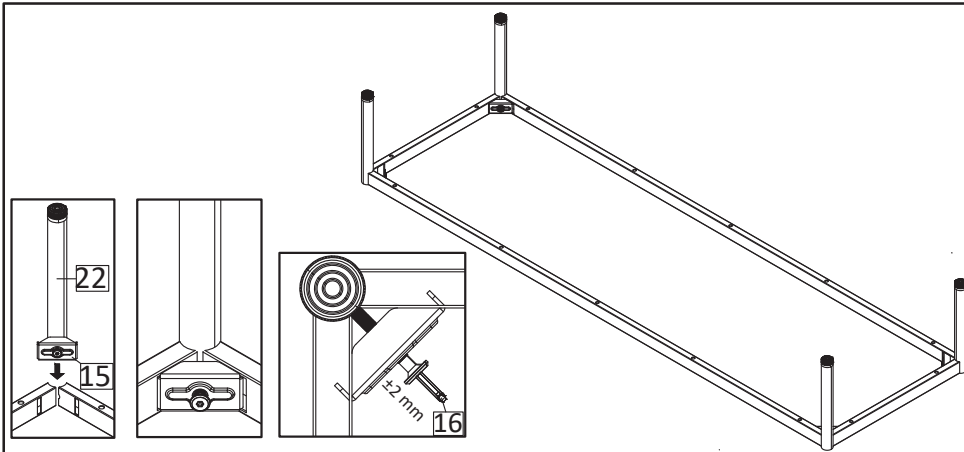


STEP9: Install the prepared Leg (HW22). Ensure the Corner Brace (HW15) hooks onto the hole of Support Metal Leg 1 (HW13) and (HW24). Screw in just enough to grip the support metal leg altogether using Allen Key (HW16). Do not fully tighten. Repeat for the other legs

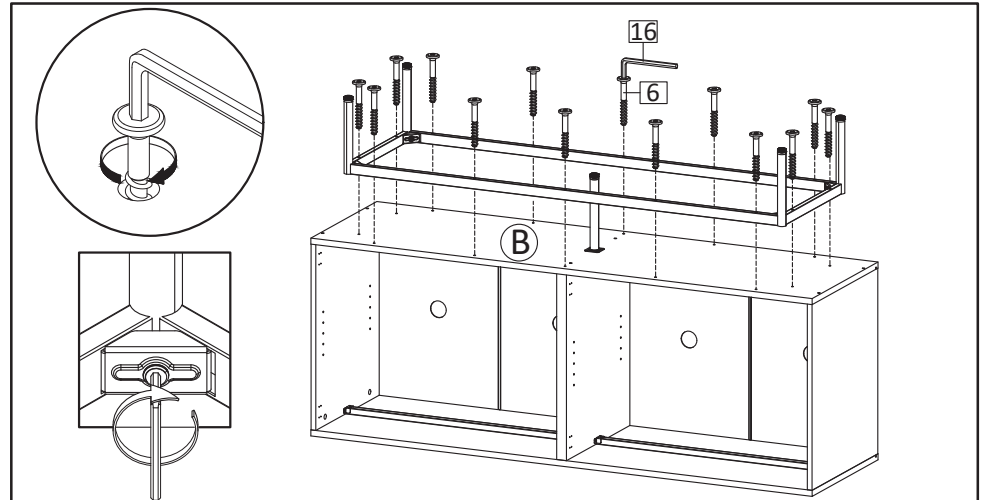

STEP10: Install assembled leg unit from Step 9 onto main assembled unit and secure with Screw (HW6), tighten with Allen Key (HW16). Then continue to tighten all the Screw on corners of assembled leg unit.

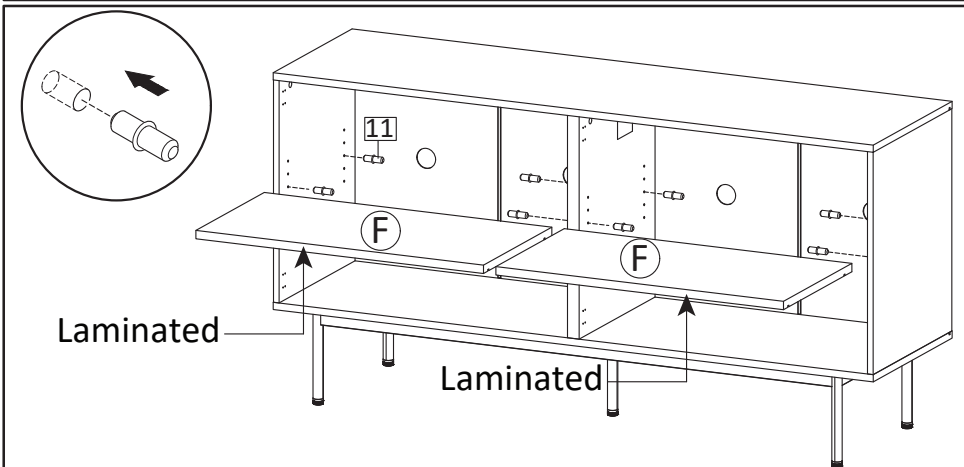


STEP11: Insert Shelf Pin (HW11) into the holes on Center Boards, on the desired level. Then place the Adjustable Shelf (F) by inserting the grooved line on the shelf into the shelf support.

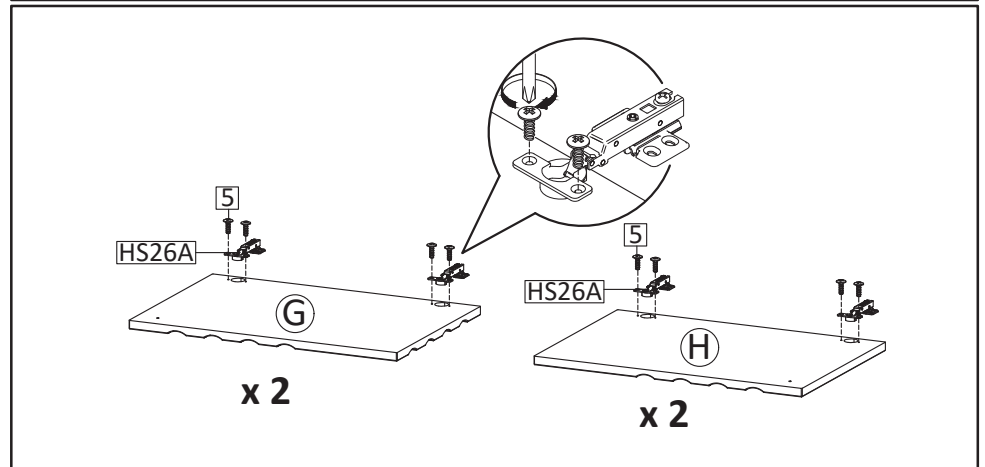


STEP12: Insert Hinge (HW HS26A) into Wooden Door Left (G) and Wooden Door Right (H). Secure with Screw M4.5x12.5mm (HW5).

PREPARATION


- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 60 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer Care team is always here to help.

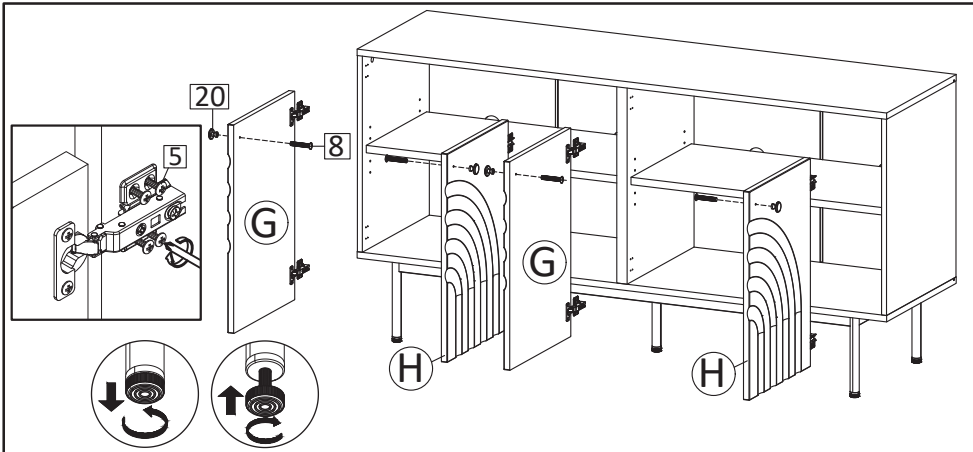

STEP13: Install Wooden Door Left (G) and Wooden Door Right(H) into Side Boards and Center Board, please review above images carefully. Secure with Screw M4.5x12.5mm (HW5). Insert Handle (HW20) Secure with Screw M4x25mm (HW8) into Doors. Refer to separate page to adjust hinges. Place your furniture on level floor. The legs come with adjustable leveller, adjust it as needed until your furniture sit steady on the floor.

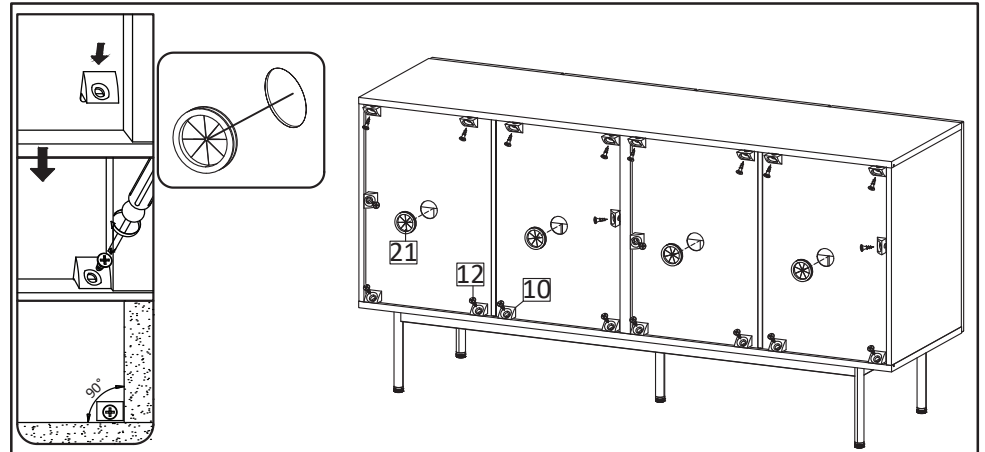

STEP14: Use Wedge (HW10), Screw M3.5x15.5mm (HW12) to tighten the back of Sideboard by using screwdriver. Please align the top board and bottom board in 90° position against the side board, before securing the wedges (HW10). Insert Cable Hole Rubber (HW21) as figure.

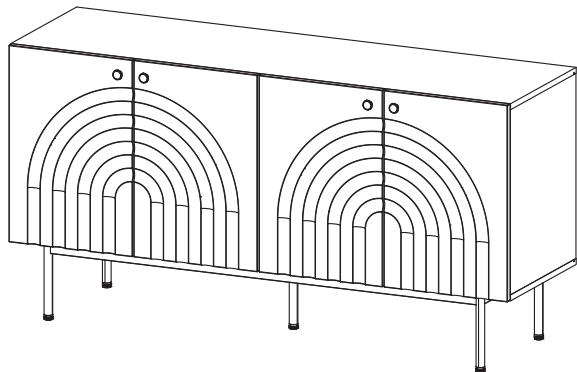






STEP15: Assembly is Complete.

TIPPING RESTRAINTS KIT INSTALLATION GUIDANCE



Different wall materials require unique wall fasteners.

The wall plugs (AA2) and screws (AA3) are designed for fixing to concrete walls only.

Please consult your local hardware store to ensure you are using the correct hardware for your wall type.

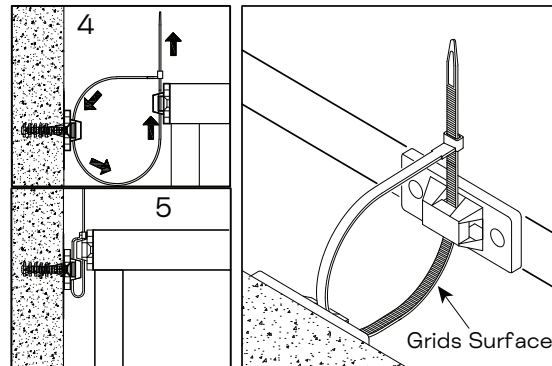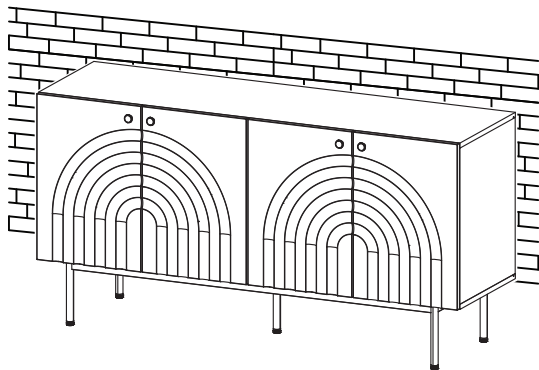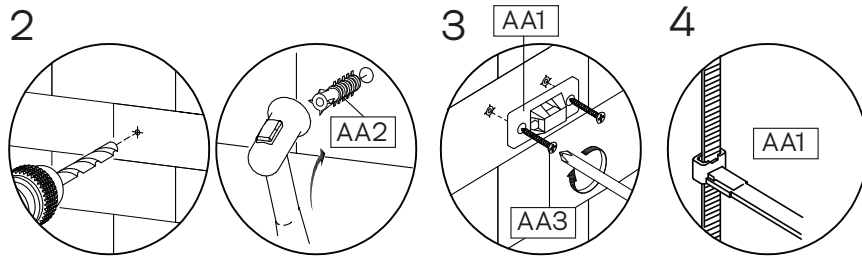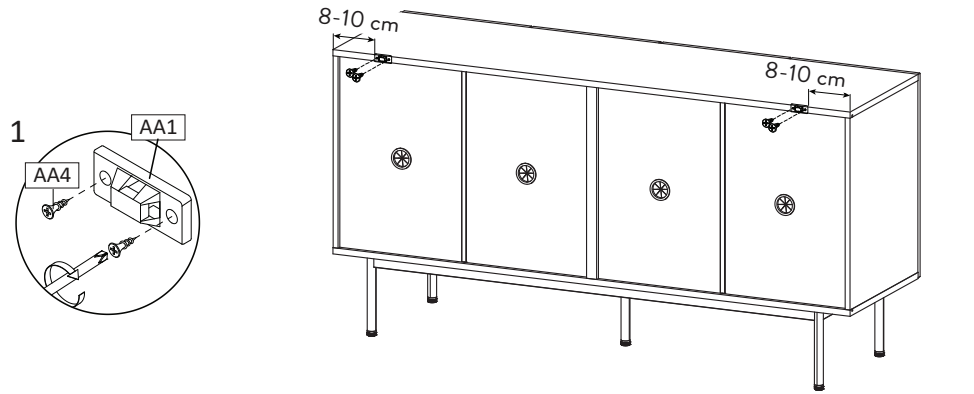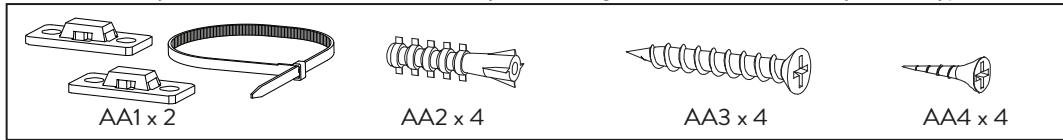


HOW TO ADJUST HINGES

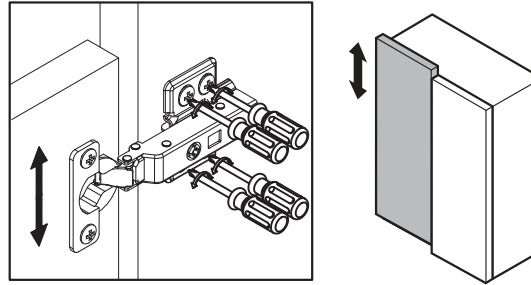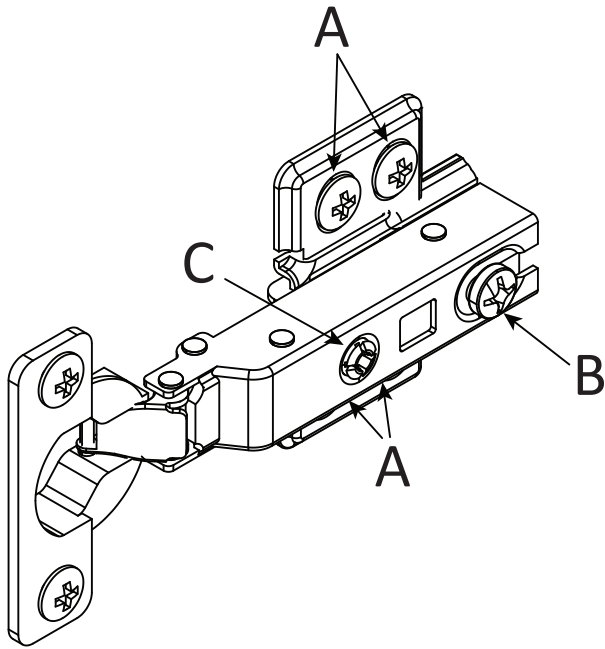


To adjust the vertical height.

Loosen the four screws "A" on both hinges. Two of them are usually in slotted holes which allows you to adjust up or down by few mm. Then tighten back up.

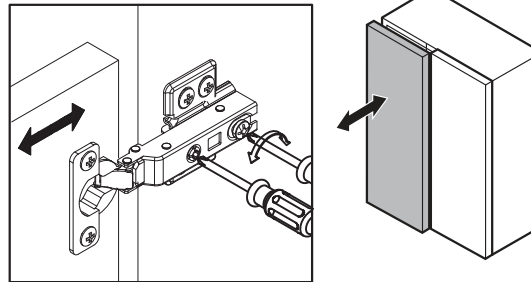

To adjust depth.

Loosen screw "B" and adjust door, if the door can not be adjusted, please loosen screw "C", then try again. Tighten screw "B" and "C".

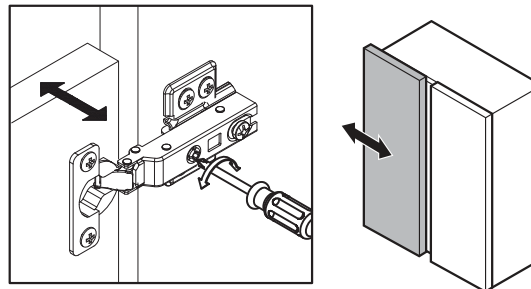

To adjust side ways.

Turning the screw "C" on BOTH hinges on each door.