



USER MANUAL

WFS200 Adjustable Bed



Contents

Safety & Warnings	03
System & Parts Included	04
Bed Assembly	06
Remote Operation	08
Pairing Your Remote	09
Sync 2 TwinXL Beds	10
Bed Accessories	11
Troubleshooting	12
Warranty	14
Additional Information	15

Safety & Warnings

About Us


At Wayfair, we want our reputation to rest comfortably on the dependability and safety of our products. In order to accomplish this, we ask that you, the end user, read this manual and observe the warnings and safety instructions provided throughout. Failing to do so will void the warranty of this product.

- 1.** This bed is for indoor use only.
- 2.** When bed is in motion keep your body within the confines of the bed to ensure no limbs become caught or pinched between moving parts.
- 3.** Keep liquids away from the bed to reduce risk of damage to electronic parts.
- 4.** Do not allow children or those with disabilities that require supervision to operate the bed unsupervised.
- 5.** Do not allow people or pets under the bed.
- 6.** Our bed and motors are designed to withstand up to 1000lbs of evenly distributed weight.
- 7.** The motors in this unit are not designed to operate continuously for more than 2 minutes in an 18 minute time span. Doing so will shorten the life of the motors and void the warranty.
- 8.** While our beds are beneficial to those with disabilities and special needs they do not comply with and are not approved by hospital standards and for residential use only.
- 9.** When using equipment that administers oxygen, route and secure all tubing and wires safely away from all moving parts of the bed to ensure tubing does not become entangled or damaged through normal use of the bed.
- 10.** Consult your physician if you have a pacemaker before using the massage features of bed. It is possible for a pacemaker to interpret the vibration of the massage feature as movement/exercise.

System & Parts Included

Getting to know your WFS200

From this view we can see all the parts that make up the Wayfair WFS200. Let's take a closer look at the parts list.

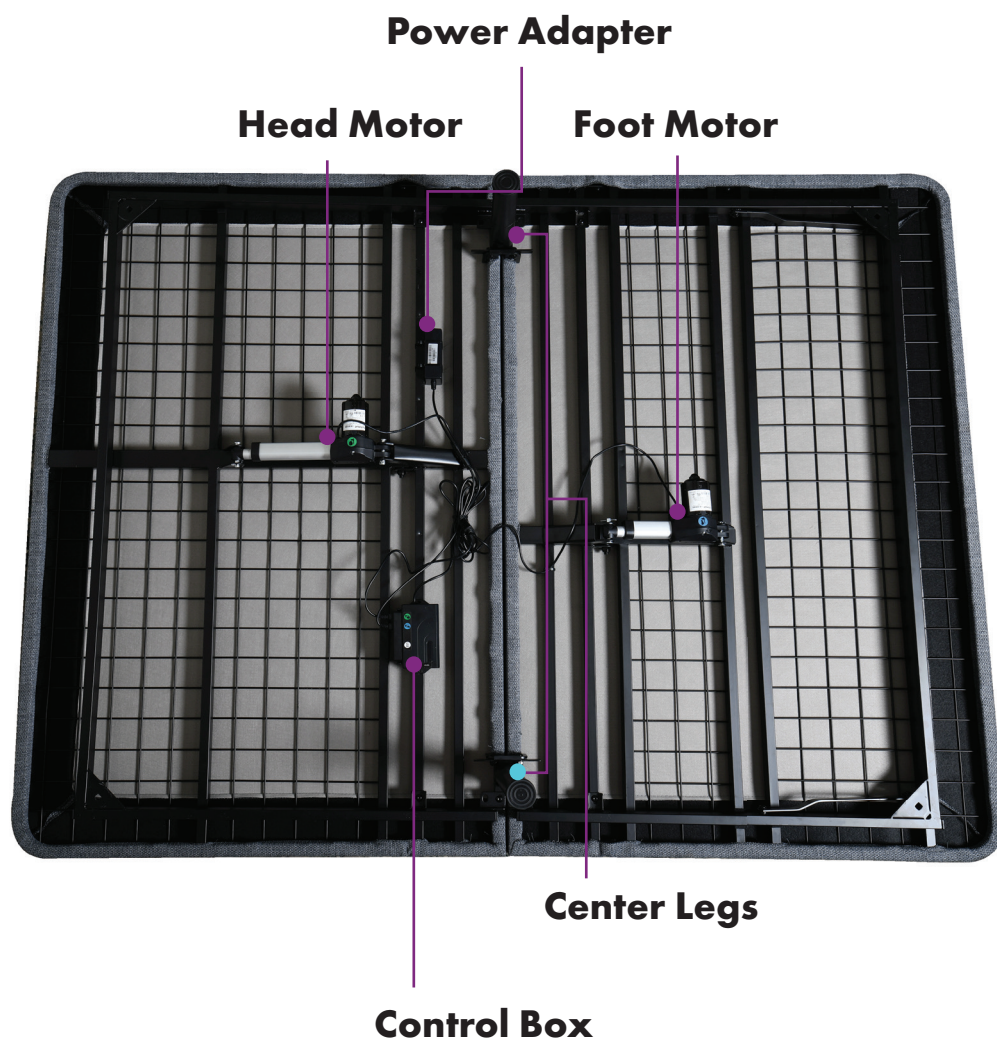

Mattress Guard

The mattress guard locks into the bed preventing the mattress from moving or falling out while the bed is moving or once you have found your preferred setting.



Remote Control

The WFS200 remote has a host of features we will go over later in the manual. It requires 2 AAA batteries.




Adjustable Legs

Our adjustable legs are comprised of one 6.5" section and one 4" section allowing you to find the perfect height for your Wayfair adjustable bed.



Power Adapter

The power adapter plugs into your wall outlet and provides power to the components of the bed. It has a LED indicator which is lit up when it is getting power.

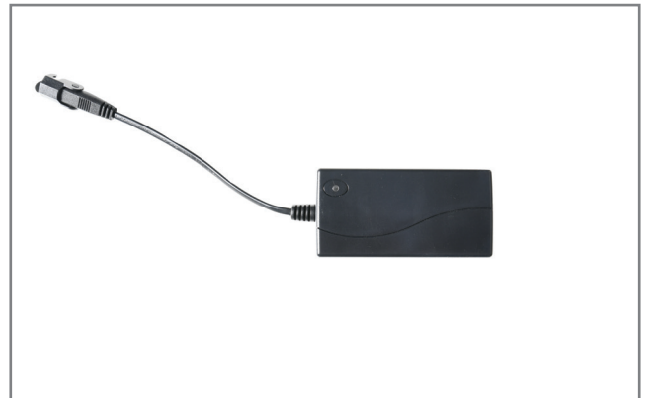

Bed Assembly

1.

Remove the bed from the packaging by cutting the taped edges of the box. After removing the bed from the box and the plastic wrap around it, lay the bed flat.



2.

After laying flat unfold the base. This will expose the remote, packaged leg box and mattress guards. Remove the remote, packaged leg box and foot guards by cutting their zip ties.



3.

After cutting the zip ties, remove the remote, legs and mattress guards from their boxes and packaging.



4.

The center legs are already attached and act as the connecting hinge for the bed. **DO NOT REMOVE** the bolts that connect the center leg. If you would like to change the height of the base simply unscrew the section of leg no longer needed and place the removable plastic foot cap on the exposed center leg

**5.**

To attach the legs, remove the silver bolt from the end of the leg. Then place the bolt inside the square bolt hole in the frame and turn the leg clockwise on the bolt until tight and secure.

**6.**

After the legs have been attached assembly is now complete. Team lift the bed into the correct upright position. Attach the mattress guards into the correct sockets. Your Wayfair adjustable bed is ready to use.



Remote Operation



Reset to Flat Position without Remote

In the case that you lose your remote and need to return the bed to flat, press and hold the learn button on your control box and the bed will lower to the flat position.

Pairing Your Remote

Remote Control Pairing Mode

First on your WFS200 remote, press and hold the Head Down and Foot Up buttons together. Keep both of these buttons held down for the next step.



Control Box Pairing Mode

Next on your WFS200 Control Box, press and hold the Learn button on the side of the control box. If done correctly, you should hear a beeping sound.



Test and Confirm

If done correctly there should be a beeping sound coming from the Control Box. Test the features of the bed by using the remote to confirm the pairing's success. If the remote can operate any function of the bed you will know the remote is paired correctly. If the remote can operate a feature of the bed but not another that is a good indicator that the feature the remote can not operate is not functioning properly and you should contact customer service. If the remote is still not operating the base repeat the above steps.



Sync 2 TwinXL Beds

Pair Remote to First Bed (Bed A)

To sync two Twin XL beds into a Split King you will need to first make sure the remote is already paired to the first bed (Bed A). If the remote is not already synced, refer to page 9 for pairing instructions.




Pair Remote to Second Bed (Bed B)

Then using the remote from (Bed A), pair that same remote to (Bed B) using the instructions on page 9.



Test and Confirm

If done correctly, the remote from (Bed A) should now control both (Bed A) and (Bed B) together. If the remote is still not controlling both beds, repeat the above steps.

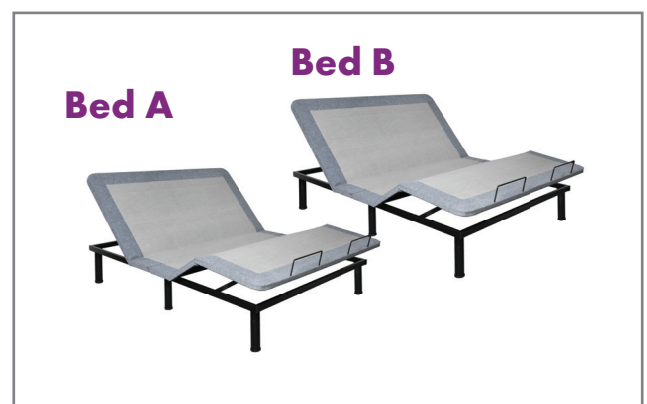

Bed Accessories (sold separately)

Leg Extensions Set

The Leg Extension Set adds a total of 3" of height to your base. Simply attach one segment to each leg of the base.



Headboard Bracket

The Headboard Bracket Adapter allows for your adjustable base to connect to a panel headboard. The brackets connect to the base via the legs under the head of the base and then bolting the face plates to the headboard.



Bed Connector Bracket


When using two Twin XL bases as a Split King you can connect the two beds together with a set of Base Connector Brackets to ensure the beds stay closely connected.



Troubleshooting

No Power

If there is no power, check to make sure all cords are plugged in properly and the power adapter is securely plugged into the power outlet. Test the outlet to ensure it has power. If the LED power indicator will not light up on the power adapter, the power adapter needs to be replaced. Contact customer service.

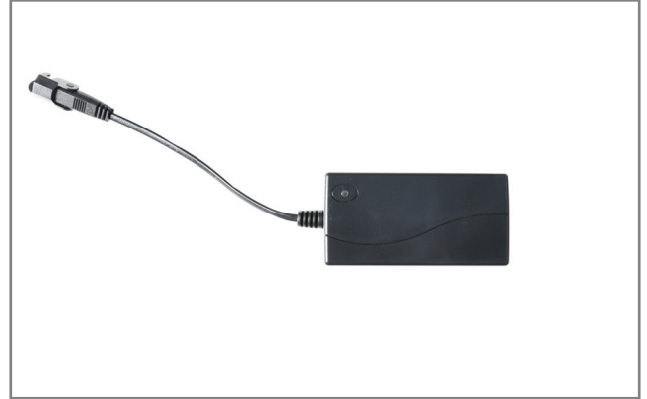

Remote Not Functioning

If remote backlight LED/Flashlight will not light up test the batteries and replace as needed. If new batteries still will not power the remote contact customer service. If remote has power but can not operate the bed then the remote needs to be synced to the bed. (See pairing instructions on page 9)



Lift Motor Not Functioning

If there is no response from the head or foot motor ensure all cords are securely plugged in and the base has power. If motors will still not engage contact customer support.



Customer Support Contact Information

For any additional Customer Service issues, questions, and concerns,
please contact the original manufacturer below

Customer Support
1-888-444-9888
info@smartflexusa.com
customerservice@smartflexusa.com
623 Southwest Street,
High Point, NC 27260

Warranty

If a potential issue with your product arises and you wish to make a claim, you must contact customer service at 1-888-444-9888 within 20 days of discovery of the issue. Please keep the original sales receipt that was received from the retailer at the date of purchase along with the model number for any warranty claim.

1. Warranties are non-transferrable and only given to the original purchaser of the Wayfair Adjustable Base.
2. Your Wayfair, Inc Adjustable Bed is warrantied against any defects of all parts and full labor for a period of five years starting from the date of purchase. The metal frame is covered by a lifetime warranty (20 years) starting from the date of purchase.
3. Warranty shall not apply if (1) the damage is caused by the purchaser, (2) there has been any repair or replacement done by an unauthorized person, (3) the adjustable base has been mishandled through physical or electrical abuse or misuse, or operated in an improper manner that is inconsistent with the instructions outlined in the Wayfair Sleep Instruction Manuals, (4) there is any costs for unnecessary service calls.

Date of purchase:

Place of purchase:

Serial & Model Number:

Additional Information

Bed Height & Dimensions

Twin XL: 79" x 38" x 15"

Full: 74" x 54" x 15"

Queen: 79" x 59" x 15"

King: 79" x 76" x 15"

Wireless Remote Radio Frequency 2.4 Ghz

FCC compliance device complies with part 15 of the FCC Rules under these two conditions:

1. This device does not cause any harmful interference.
2. This device will accept any interference received., including interference causing undesired effect on the operation.



WFS200 Adjustable Bed