


Product&Notes

What's in the Box

Smart Ceiling Fan Light

PACKAGE CONTENTS



M5x35mm Screws and concrete for install the hanging plate to the ceiling



M2x20mm Screws and concrete for remote holder



M4x32mmScrews and caps for install the mounting plate to J-Box(Not included)



Nuts Cap



M3x10mm Screws for secure the mounting plate



Remote and holder

Get Ready

- Know your Wi-Fi network and password.
- Make sure your mobile device is running.
- Make sure you're connecting to a 2.4GHz Wi-Fi network (can't connect to 5GHz networks).

INSTALLATION INSTRUCTIONS

IMPORTANT:


Read all instructions before installing fixtures. Retain for future reference.

SAFETY:


For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

WARNING :


Make certain power is OFF from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.




Please make sure turn off the power of the circuit breaker before installation.




Screw the hanging plate to the J-box. Connect the wires with Terminal Cap. (Black is positive and white is negative)




Screw the hanging plate to the Ceiling.



Rotate the lamp body to the secure the light to the hanging plate.



Tighten the screws of the mounting plate to ensure the lamp is installed firmly.



Turn on the power of the circuit breaker.


4. Troubleshooting

1. Can't connect to your Wi-Fi network.

Make sure you entered the correct Wi-Fi password during the Wi-Fi setup. Check whether there are any Internet connection problems. If the Wi-Fi signal is too weak, reset your Wi-Fi router and try again.

2. If you fail to bind, you will need two phones, one to set the hotspot and the other to connect the hotspot and add the device through the app. If the device is successfully added, the device is normal. The problem may be in the router, you need to check your router Settings to see if there are MAC and DHCP restrictions. **Products do not support 5GHz networks.**

Remote Control

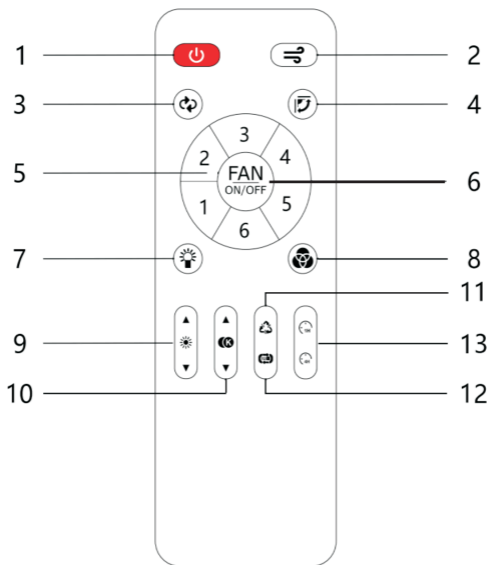

1: Turn on/off	2: Wind mode: nature/soft
3: Fan rotates: forward/ in reverse	4: Shaking head (Not supported yet)
5: Fan speed: 1 is the weakest, 6 is the strongest	6: Fan on/off, Long press 5 seconds to trigger the pairing mode
7: Turn on white color	8: Turn on RGB color
9: Change brightness	10: Change color temperature
11: Change RGB color	12: Change RGB mode
13: Countdown Timing 1 Hour/4 Hours	

The remote control and the fan light are paired by default at the factory, so there is no need to pair them.

If the remote control doesn't work, please re-pair it as below.

1. Connect the fan light to the power supply and make sure the fan light works normally (the light comes on slowly);
2. Turn the fan light off for 5~10 seconds and then turn it back on by wall switch;
3. Press and hold the button "1" until the fan light blinks 3 times rapidly and then release it;
4. Remote control pairing is successful, at this time you can press the button to control the fan light.

Long press the button "6" for 5 seconds to make the fan light enter App pairing mode;

4. How many devices can I control?

- The maximum number of timers that can be added to a single device: 30
- Maximum number of devices that can be added in a single home: 120
- The maximum number of Tap-to-Run that a single home can create: 100
- Maximum number of Automation that can be created in a single home: 100
- The maximum number of tasks that can be added in a Tap-to-Run: 150
- The maximum number of tasks that can be added in an Automation: 150
- The maximum number of conditions that can be added in an Automation: 10
- The maximum number of mobile devices that can simultaneously log in to an account is: 200
- The maximum number of Homes that can be created by a single App account is: 20
- The maximum number of home members that can be added in a single home is: 20
- The maximum number of rooms that a single home can create is: 20
- The maximum number of devices that can be added in a single room is: 50
- The maximum number of devices that can be added in a single device group is: 100
- The maximum number of device groups that a single home can create is: 20
- The maximum number of each device group that can be shared with other users is: 20
- The maximum number of each device that can be shared with other users is: 20
- The maximum number of each App account that can be invited by other homes is: 20

5. What should I do, when I find a problem with the purchased product?

Please email us. We are dedicated to ensuring your 100% satisfaction. Rest assured if the problem is with this product, we'll be more than happy to exchange it for a new one immediately.

Parameter information

Input Voltage	100-130VAC,60Hz
Wattage	Light: Max.35W Fan: 15W
Color Temperature	RGBAI +Tunable White(2700K-6500K)
CRI	80+
Lumens	2800lm
Beam Angle	120°
Rated Life	25000h

CAUTION:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.