


Power Tool Organizer Instruction Manual



Installation guide video

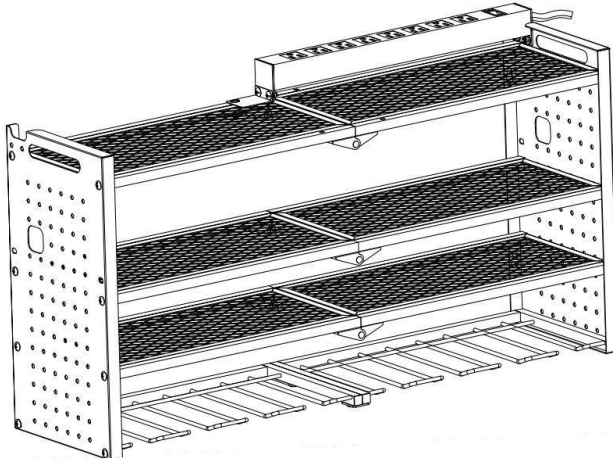

Customer Service Email: help@EverythingSupport.com
Toll-free: (855)208-0668(MON-FRI 9:00 am-6:00 pm Eastern Time)

WARNING



General Safety Warnings



- 1 Please read this manual carefully before installation and check that all components are complete.
- 2 Do not overload. Each layer and slot should not exceed its rated capacity.
- 3 It is recommended that at least two people cooperate during wall mounting to prevent accidents.
- 4 Ensure the wall is solid. Do not install directly on hollow or plasterboard walls.
- 5 Always wear safety goggles when using power drills to protect your eyes from dust.
- 6 Do not hang heavy objects before installation is fully completed.
- 7 do not place it in humid or outdoor environments.
- 8 Stop using the product and contact after-sales service if it becomes loose, deformed, or cracked.

INTENDED USE

Used to store and hang small metal cutting and assembly power tools (e.g. electric drills, impact drills, reciprocating saws, electric screwdrivers, electric wrenches). Tools can be hung upright or inverted in the bottom slots. Shelves can store batteries, small toolboxes, or larger tools such as angle grinders and cutters. Some versions are equipped with a power strip for user convenience.

PART LIST

Part No.	Description (English)	Qty	Picture
1	Left Side Panel	1	
2	Right Side Panel	1	
3	Left Drill Holder Shelf	1	
4	Right Drill Holder Shelf	1	
5	Drill Rack Fixing Plate	1	
6	Drill Rack Connector Plate	1	
7	Shelf Panel	2	
8	Hook	4	
9	S-Hook	4	
10	M6×12 Round Head Bolt	28	
11	M6 Flange Nut	7	
12	Rubber Plug	4	

13	ST6.3×38 Self-tapping Screw	4	
14	Bit Holder	1	
15	M6×25 Round Head Bolt	1	
16	Socket Mounting Bracket	1	
17	Power Strip	1	
18	Top Cover Panel	1	

Tool and safety

Tools Required: Phillips screwdriver(Not included)


Safety Tips: Before assembly, lay a soft cloth or cardboard on the floor to prevent scratches or damage to parts.

Installation Steps

Step 1: Install the Drill Holder Shelves


Assemble Left Shelf (Part 3) and Right Shelf (Part 4) using:

- Fixing Plate (Part 5)
- Connector Plate (Part 6)
- Bolts (Part 10)
- Ensure all connections are firm before proceeding.

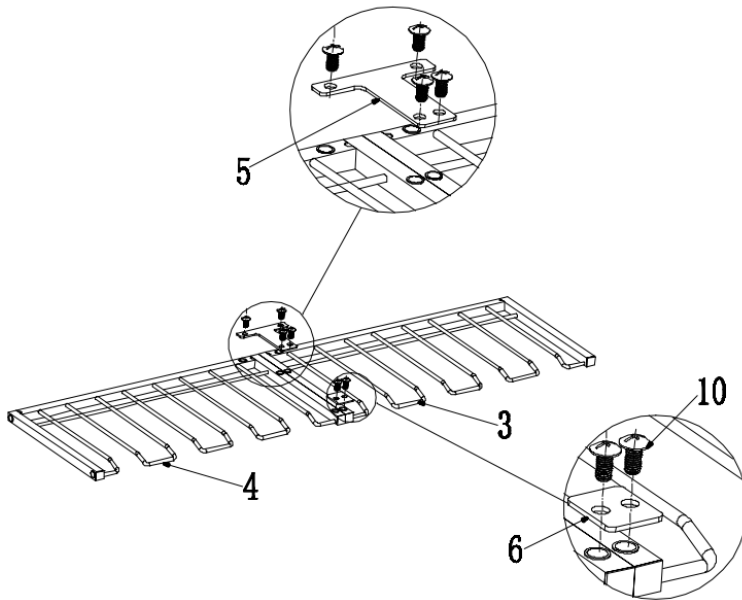


Step 2: Install the Side Panels

- Attach the Left Side Panel (Part 1) and Right Side Panel (Part 2) to the drill holder frame.
- Use M6×12 Bolts (Part 10) to fasten from the outer side.
- Confirm vertical alignment of the side panels.

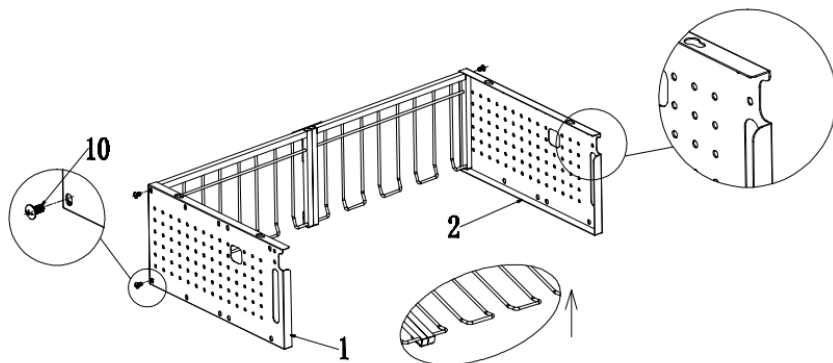


Step 3: Install Shelf Panels

- Insert Shelf Panels (Part 7) into the frame from above.
- Align the slots and fasten each side with M6×12 Bolts (Part 10).
- Make sure the panels are evenly positioned.

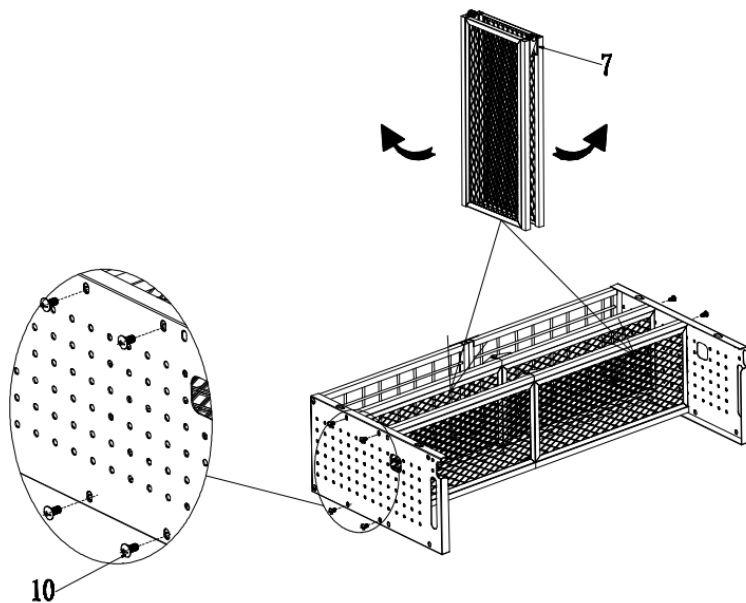


Step 4: Assemble Socket Bracket

- Attach Socket Mounting Bracket (Part 16) to Power Strip (Part 17).
- M6 Flange Nuts (Part 11) and Bolts (Part 10) to secure it firmly.

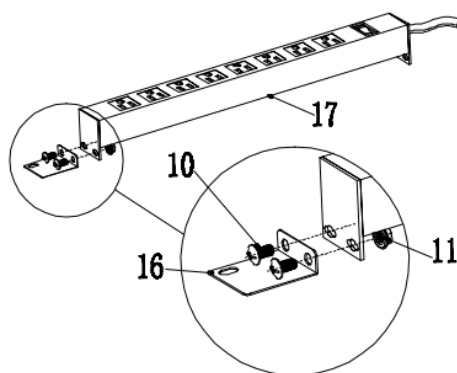


Step 5: Mount the Power Strip

- Fix the assembled power strip bracket onto the frame.
- Align and fasten the bottom ends using M6 Flange Nuts (Part 11) and Bolts (Part 10).

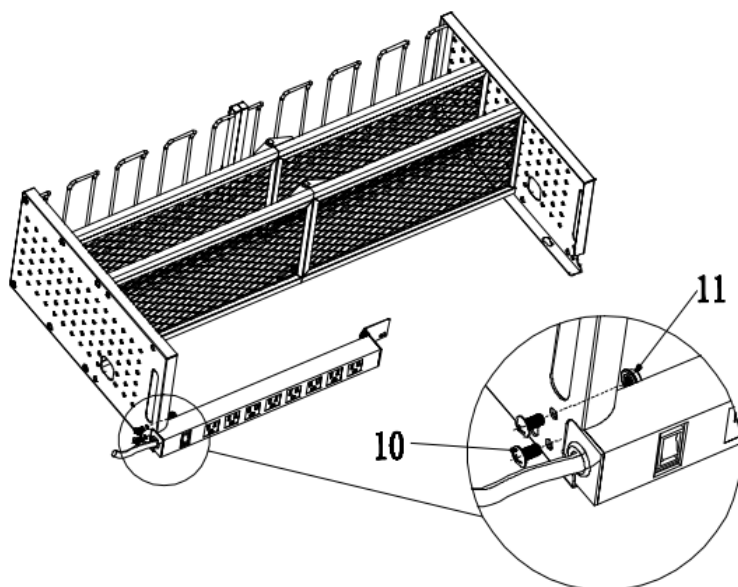

Step 6: Install the Top Cover Panel


- Place the Top Panel (Part 18) over the upper frame.
- Secure it from the underside using:
 - Bolt (Part 15)
 - Flange Nut (Part 11)

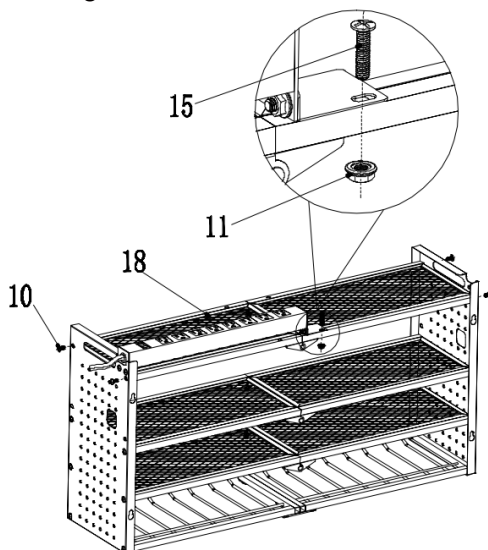

Step 7: Drill Holes in Cement Wall


For concrete wall installation:

- Use Ø8 mm drill to make holes.
- Insert Rubber Plugs (Part 12)
- Secure with ST6.3×38 Screws (Part 13)
- Ensure hole spacing matches the slot spacing on back panel (42 mm slot shown)

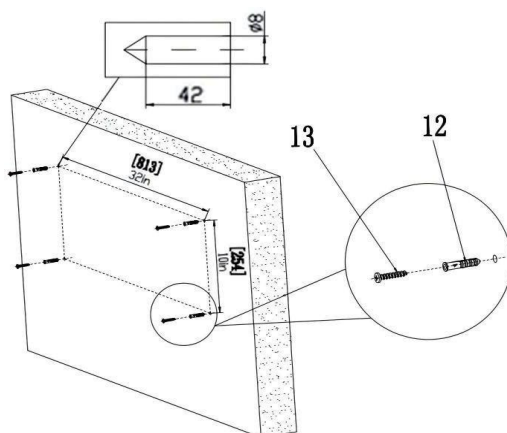



Step 8: Drill Holes in Wooden Wall

- For wooden wall installation:
 - Drill Ø5.5 mm holes at matching positions.
 - Directly secure using ST6.3×38 Screws (Part 13)

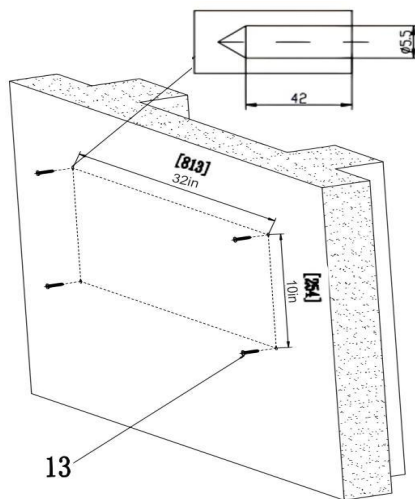


Step 9: Hang the Rack on the Wall

- Lift the assembled rack and align it with wall-mounted screws.
- Let the keyhole hangers (a) drop onto the screws (b) securely.
- Verify full engagement of hanger slots and screw heads for safety.

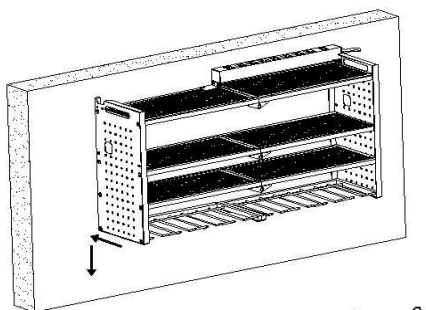


a: key hole hanger
b: screw



Step 10: Install the Bit Holder and Hooks

- Use Bolts (Part 10) and Flange Nuts (Part 11) to install:
 - Bit Holder (Part 14)
 - Hooks (Part 8)
 - S-Hooks (Part 9)
- Tighten from the inner side of the rack to secure all accessories.

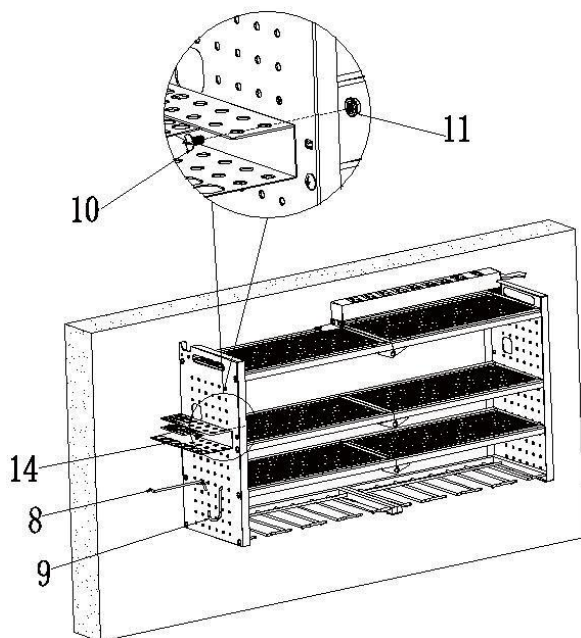

Maintenance and Care

- 1 Regularly check all bolts and hooks for looseness; tighten if necessary.
- 2 Keep the surface clean. Use a dry cloth and avoid corrosive cleaners.
- 3 Avoid direct sunlight and damp environments to prevent rust on metal parts.
- 4 Do not modify the structure or weld/pierce it without authorization.
- 5 It is recommended to regularly clean the surface with a soft cloth or natural detergent.

AFTER-SALES SERVICE CARD

We sincerely thank you for trusting our service and our products, and may this product add enrichment to your home. We guarantee that the product has undergone strict quality inspection and meticulous packaging. If you encounter any issue regarding either shipping or the product, please feel free to contact us at any time. We'd be more than happy to serve you wholeheartedly.

Yours Sincerely

- Please avoid harsh, corrosive and abrasive cleaners.
- Keep dry and avoid damp environments.

Installation guide video



Customer Service Email: help@EverythingSupport.com

Toll-free: (855)208-0668(MON-FRI 9:00 am-6:00 pm Eastern Time)

If you have any questions or concerns please feel free to contact us.
We're committed to providing our customers with the quality service.