


edishine[®]

Wall Light

[Instruction Manual]

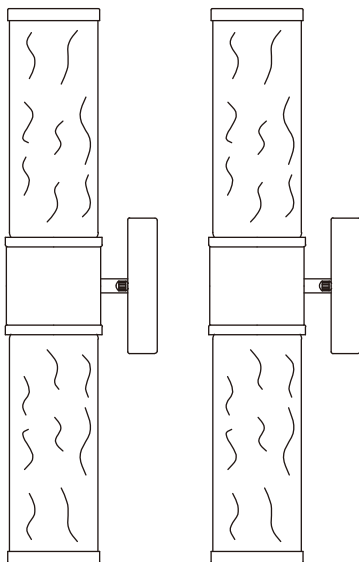

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

WARNING:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Packing List

Part	Description	Quantity
A	Lamp Body	2
B	Glass shade	4
AA	Plastic terminal	6
BB	Screw	4
CC	Nut	4
DD	Wall plate	2

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position.

Depending on which type of fuse box in your home.

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL




FIG.3 FUSE BOX

ASSEMBLING THE FIXTURE

Step 1: Remove Existing Components (for replacement installation)

Unscrew the 2 nuts securing the base to the wall plate, separate the lamp base, wall plate, and related accessories, and clean the mounting surface of dust or old adhesive.

Step 2: Install the Wall Plate

- 1.Position the wall plate against the pre-marked mounting location on the wall and mark the screw holes with a pencil.
- 2.For concrete/tile walls: Drill holes at the marked positions and insert wall anchors. For wooden walls: Secure the wall plate directly with screws.
- 3.Fasten the wall plate firmly to the wall with screws, ensuring it is level and stable to provide a secure foundation for the lamp body.

Step 3: Electrical Wiring

- 1.Strip approximately 8mm of insulation from the ends of the wires to expose the copper conductors.
- 2.Match the circuit labels: Connect the live wire, neutral wire, and ground wire from the wall to the corresponding plastic terminals on the lamp body.
- 3.Tighten the terminal screws to ensure secure, non-loose connections.
- 4.Wrap the wired connections with electrical tape to insulate exposed conductors and prevent short circuits.
- 5.Gently tug the wires to confirm they are secure, then tuck any excess wire back into the wall junction box.

Step 4: Secure the Lamp Base



- 1.Align the lamp base with the wall plate and lock them together using the 2 nuts. Ensure the lamp base fits tightly against the wall, is level, and bears weight evenly.

Step 5: Install the Bulb


- 1.Select an E26/E27 base bulb that matches the product's rated wattage (bulb not included with the product; must be purchased separately).
- 2.Align the bulb with the socket and rotate it clockwise until tight, ensuring good electrical contact and stable illumination.
- 3.Restore power temporarily to test if the bulb lights up correctly, confirming the wiring is correct.

Step 6: Install the Glass Shade









Align the 2 glass shades with the lamp body slots, gently push them into place and rotate to secure. Ensure the shades are installed evenly and tightly to prevent accidental falling.



(not included)



(included)

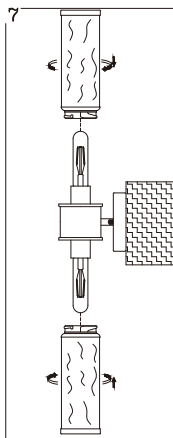

IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not alter the plug.

Specifications:

- Input Voltage: 120VAC 60Hz
- Socket Type: Standard Medium E26
- Max.Load Power: Incandescent Bulb 60W、LED Bulb 12W

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.

