


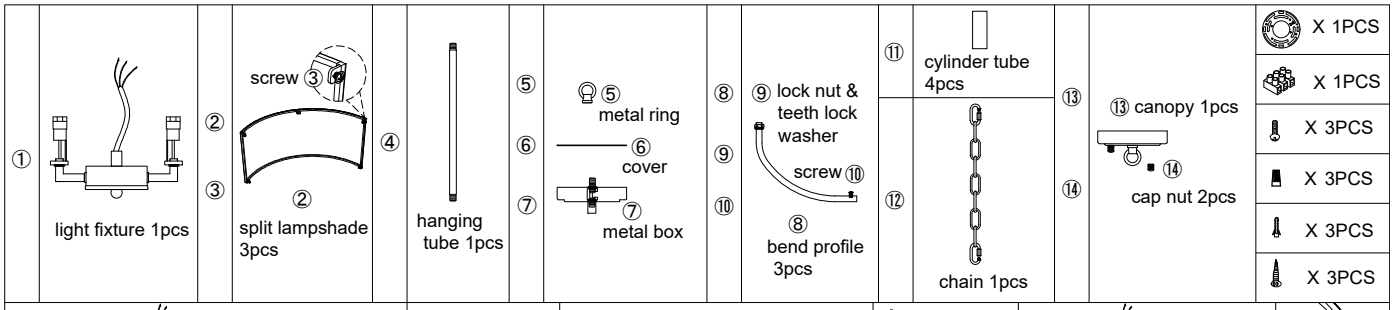





1.Let the wire of the fixture ① go through the hanging tube ④ and metal box ⑦, rotate to fasten all parts together.




how to assemble the lampshade together




2.Assemble the split lampshade ② to be a complete lampshade with screw ③.(please don't tighten the screw ③ until all of the lampshades are put in the open end holes and adjust all parts in level, rotate to fasten the screw ③ at last)



how to install profile ⑧ to the metal box ⑦.







how to install the lampshade ② to the profile ⑧.

3.Install the profile ⑧ to the box ⑦ with lock nut & teeth lock washer ⑨, after that install the lampshade ② to the profile ⑧ with screw ⑩.

Virson A (Pendant light)




4.Close the cover ⑥ to the box ⑦ with metal ring ⑤.

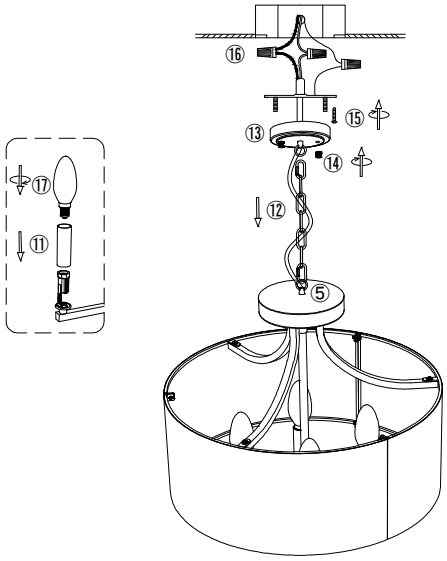


5.Hang the canopy ⑬ to the fixture with chain ⑫, let the wire go through the chain ⑫ and canopy ⑬.
6.Install the bracket to the ceiling junction box with screw ⑮.
7.Connect the wires to your home line with cap connector ⑯.
8.Install the fixture to the bracket with cap nut ⑭.
9.Put the cylinder tube ⑪ on the bulb holder and install the bulb ⑰.

Virson B (Ceiling light)

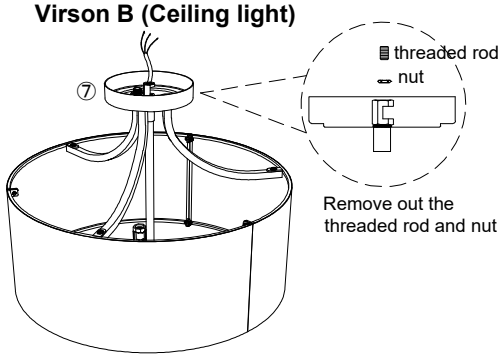

4.Loosen to remove out the threaded rod and nut from box ⑦.

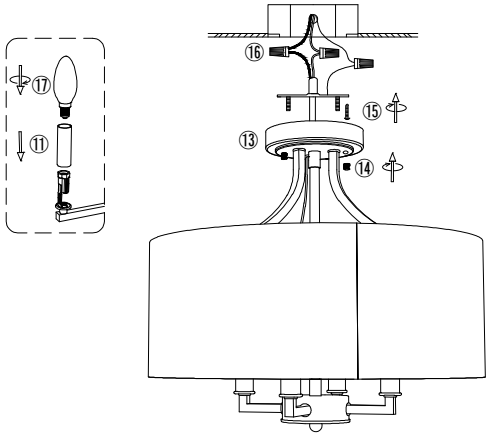

5.Install the bracket to the ceiling junction box with screw ⑮.
6.Connect the wires to your home line with cap connector ⑯.
7.Install the fixture to the bracket with cap nut ⑭.
8.Put the cylinder tube ⑪ on the bulb holder and install the bulb ⑰.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !