




Installation Specification



MDW-V2421
MDB-V2421



MDW-V3021
MDB-V3021




MDW-V3621
MDB-V3621


Notice

- Please read this assembly guide thoroughly and carefully before assembly
- Please ensure your assembly area is clear of any debris or sharp objects which could scratch or damage the cabinet.
- Our cabinets are treated with paint, which can be fire hazardous, please avoid storing in areas with high temperature or near the fire.
- Please take caution with small parts inside the package, losing or misplacing them could affect your overall assembly
- We recommend using power tools (ie: drill, pneumatic nail gun, etc) for your assembly. This will facilitate your assembly experience.
- In event of missing or damaged/defective parts not caused by wear-and-tear, please contact our authorized dealer for assistance and we apologize for any inconvenience.
- If you are not a professional or have no prior experience in cabinet assembly. We advise excessive caution and follow closely to this assembly guide.


Material List




Front Panel with
Doors




Side Panel




Back Panel




Bottom Panel




Decorative Bottom Panel




Drawer Face



Drawer Side Panel




Drawer Back Panel



Drawer Bottom Panel



Material List

NO	ITEM	Quantity		
		24"	30"	36"
1	Support Brackets	4	4	4
2	L-Shape Connector Clip	8	8	8
3	Door Hinge	4	4	4
4	1/2" Philips Screw	88	88	88
5	Leg Stand	4	4	4
6	Stand Clip	2	2	2
7	Cover Cap	1	1	1
8	Handle	2	2	2

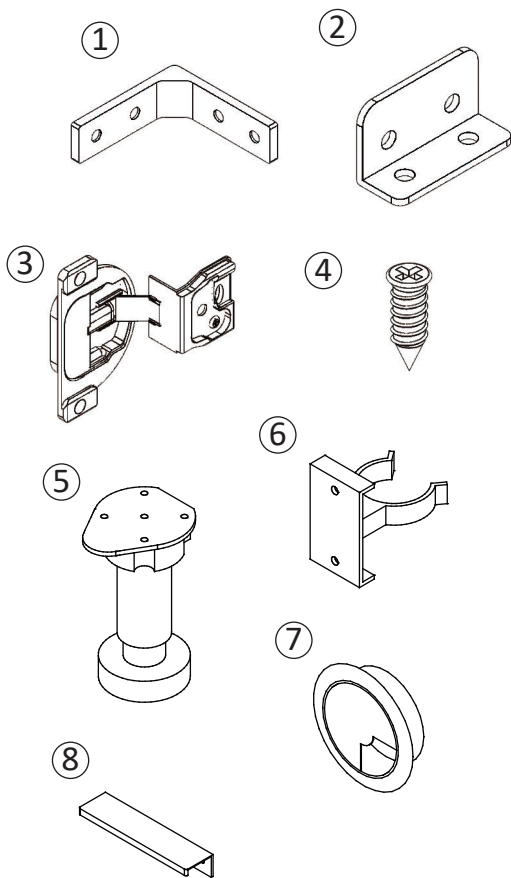



INSTRUCTION

STEP 1

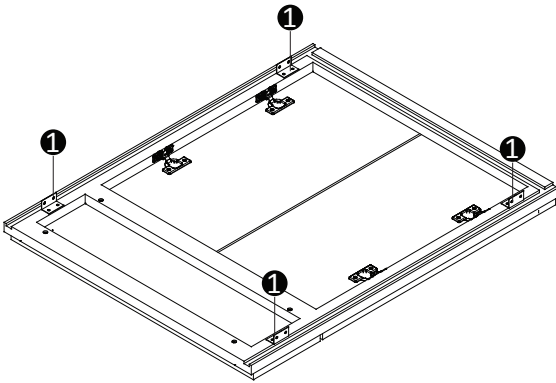

- Place the face frame in a face down position to a flat surface. Secure the L-Shape connector clip with 1/2" Philips screws to the pre-drilled holes # 1



STEP 2

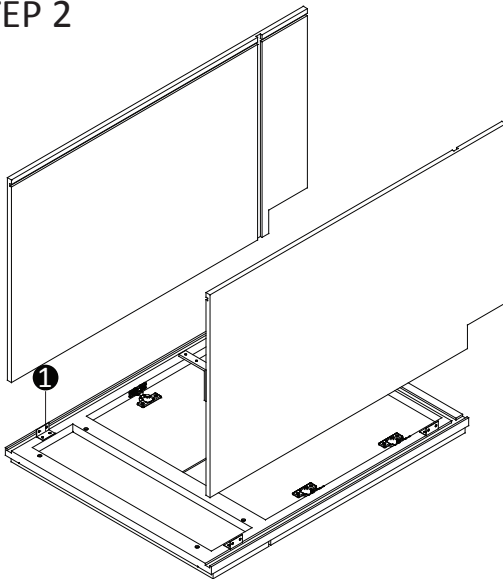

- As show in this picture, slide the side panel into the face frame's groove located on the left or right. Then, secure the side panel to the L-shape connector clip # 1 using 1/2" Philips screws. Repeat this step for the other side panel



INSTRUCTION

STEP 3

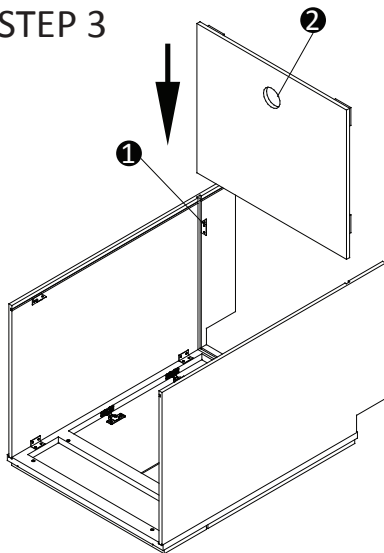


- After securing both side panels, slide the bottom panel to both side panels grooves and make sure its fully inserted. Then secure the bottom panel with the side panels using a L-shape connector clip using 1/2" Philips screws. Please repeat this step for the opposite side.

STEP 4

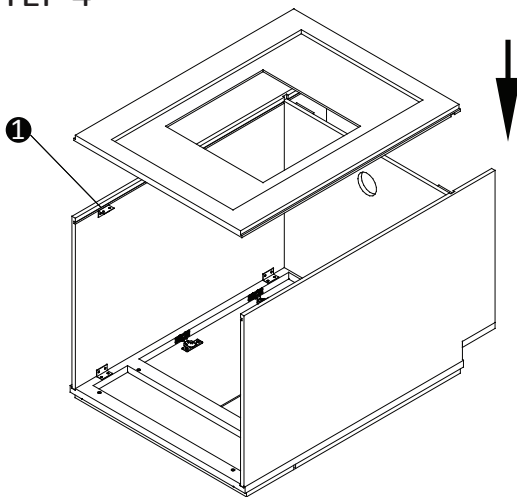



- Attach the cap cover to the hole in bottom panel.



- Now slide the back panel to the back grooves of the side panel. Make sure is fully inserted. Then secure the bottom panel with the side panels using a L-shape connector clip using 1/2" Philips screws. Please repeat this step for the opposite side



INSTRUCTION

STEP 5

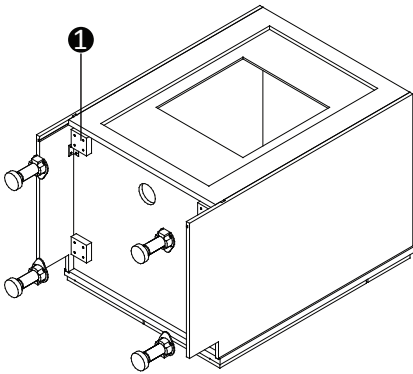


- Secure the Leg stand to the bottom panel previously installed. Secure them using 1/2" Philips screws to the pre-drilled holes on the bottom panel. Same action for another side.

STEP 6

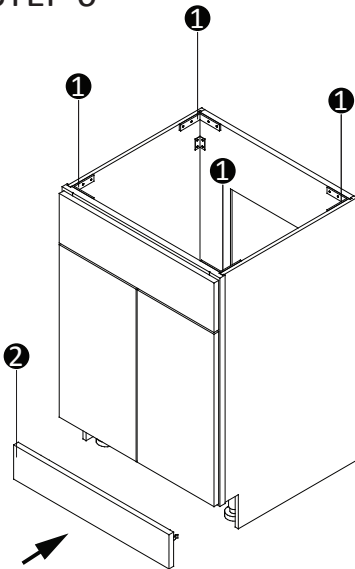



- Turn the cabinet box to the standing position. Secure the top four corners using the "Support Brackets" Use 1/2" Philips screws. Two screws per bracket will be enough.



- Secure the stand clip to the decorative bottom panel. Secure them using 1/2" Philips screws to the pre-drilled holes on the bottom panel. Same action for another side.
- Attach the decorative bottom panel to the front leg stand.


INSTRUCTION

Step 7

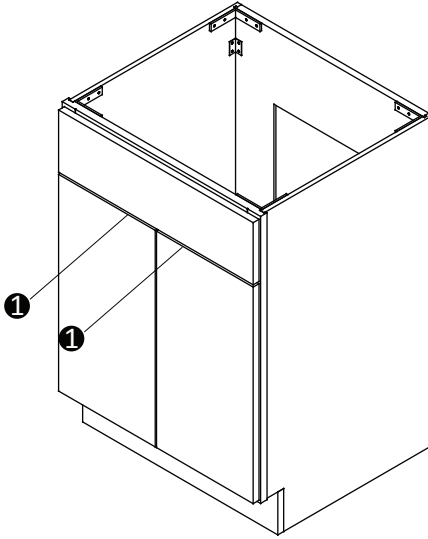

► As show in this picture, install handle into the door frame with hole located using 1/2" Philips screws.

Completed

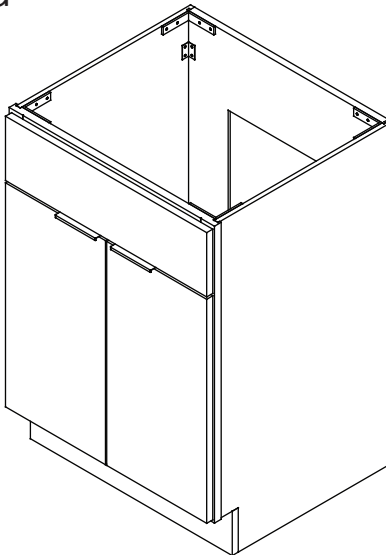

Your Dream We Built



More Information www.niturra.com