





Installation & Assembly

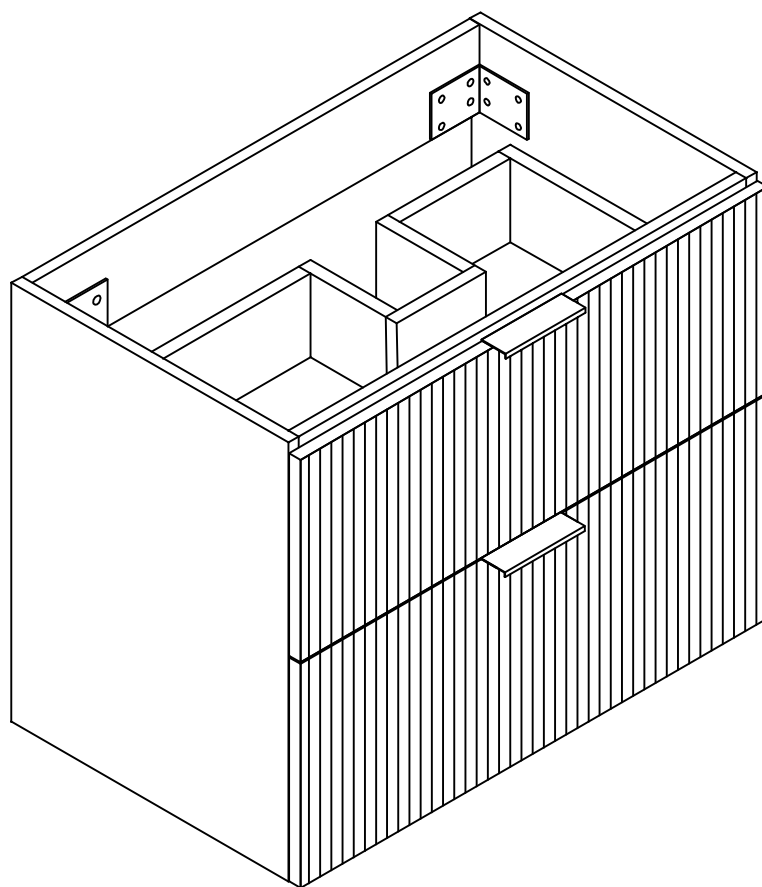




For the convenience and neatness of reading the manual, the door panel here is displayed using a simple drawing method.

YOU MAY NEED (NOT SUPPLY)

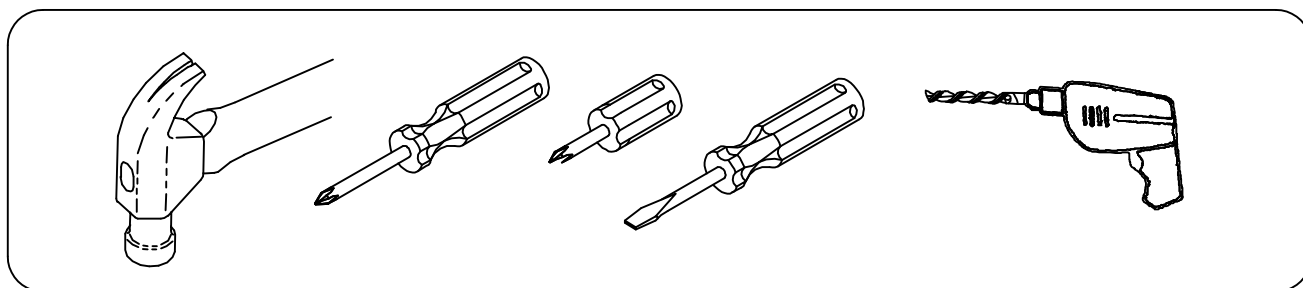


ASSEMBLY DIAGRAM

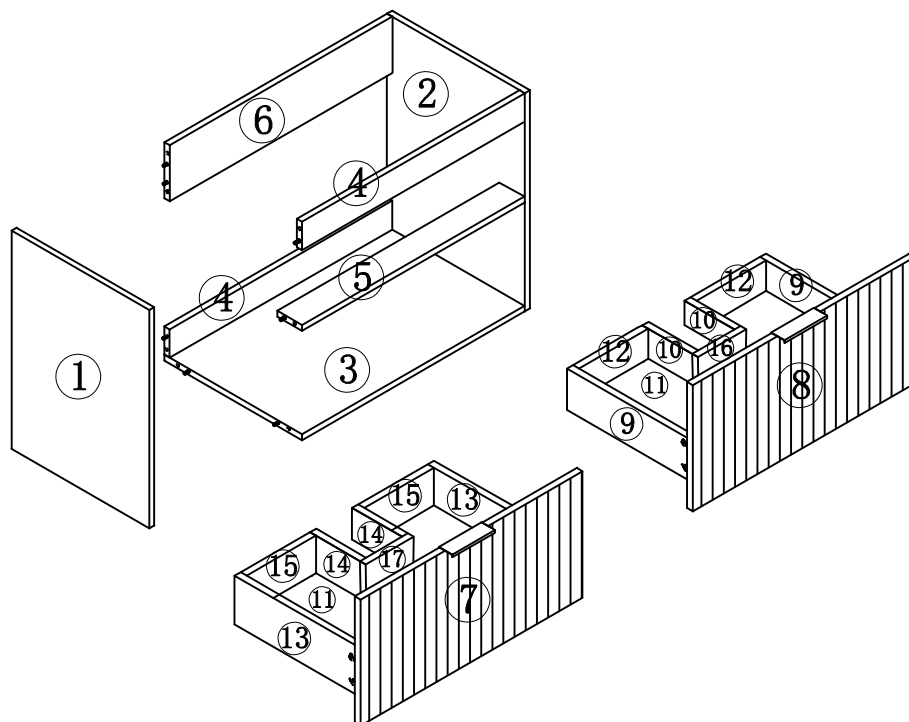


PARTS LIST					
PARTS LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
①	Left side panel 	1	⑨	Upper drawer side panel 	2
②	Right side panel 	1	⑩	Upper drawer rear panel 	2
③	Bottom panel 	1	⑪	Drawers bottom panel 	2
④	Long front and rear panel 	2	⑫	Upper drawer rear panel 	2
⑤	Front fixed panel 	1	⑬	Lower drawer side panel 	2
⑥	Back fixed panel 	1	⑭	Lower drawer side panel 	2
⑦	Lower drawer front panel 	1	⑮	Lower drawer rear panel 	2
⑧	Upper drawer front panel 	1	⑯	Upper drawer rear panel 	1
			⑰	Lower drawer rear panel 	1

PARTS LIST					
HARDWARE LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
A	Three-in-one eccentric wheel 	66	G	4*12mm screw 	4
B	Three-in-one connecting rod 	66	H	Drawer handle 	2
C	Three-in-one sticker 	66	I	White angle bracket 	2
D	8*40mm wood dowel pins 	22			
E	Drawer slides 	4			
F	4*16mm screw 	40			
CAUTION: Please confirm the parts list before installation					


STEP 1

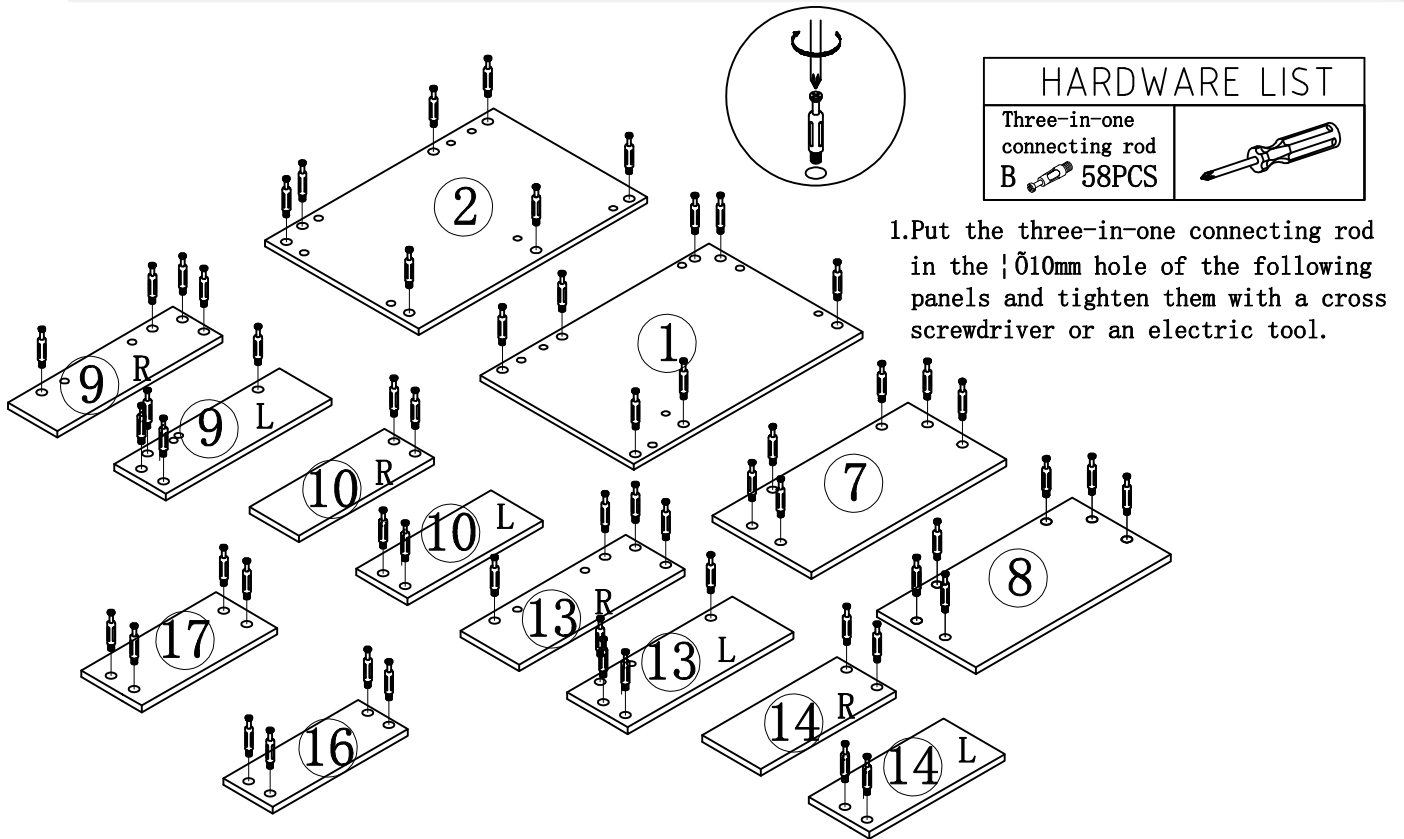

STEP 2

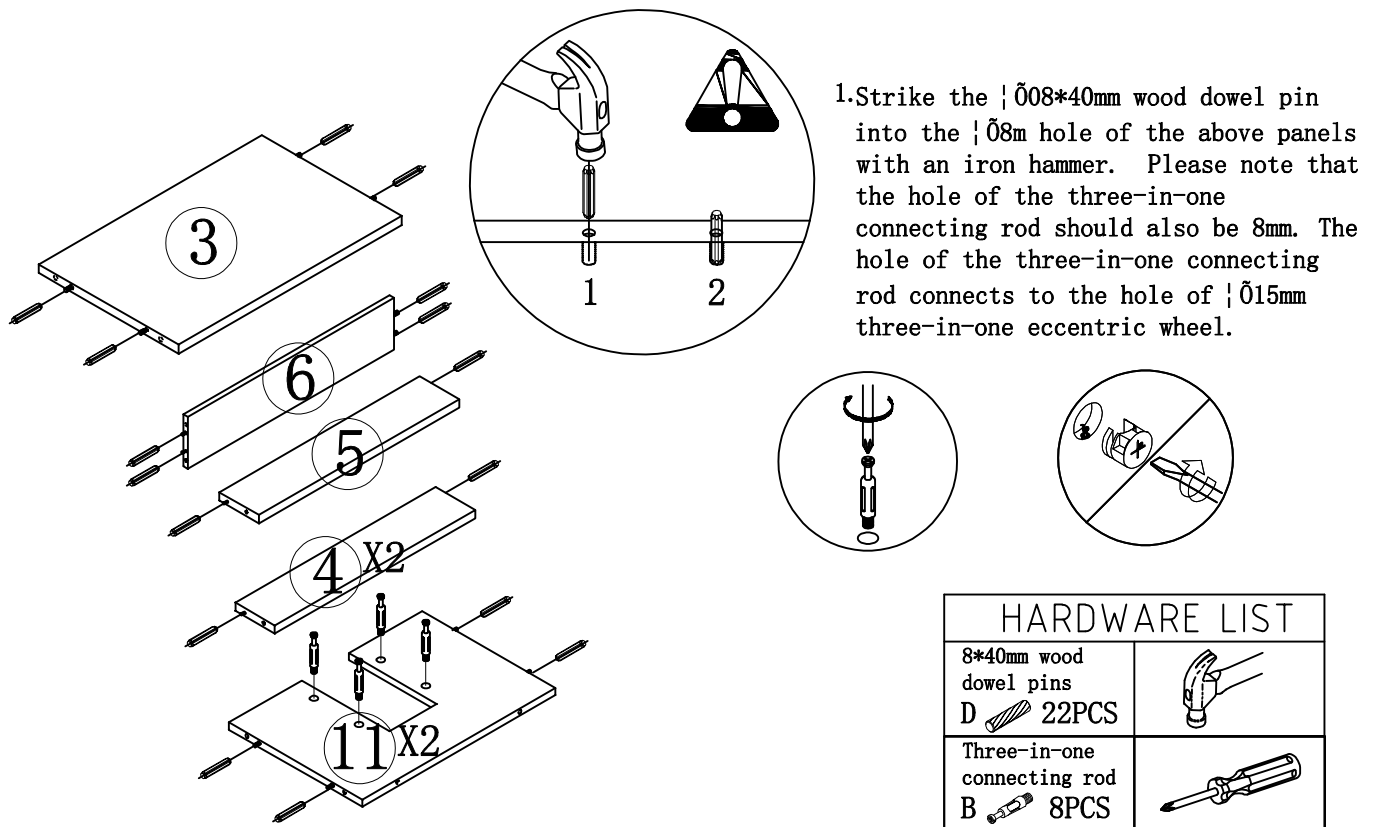

STEP 3

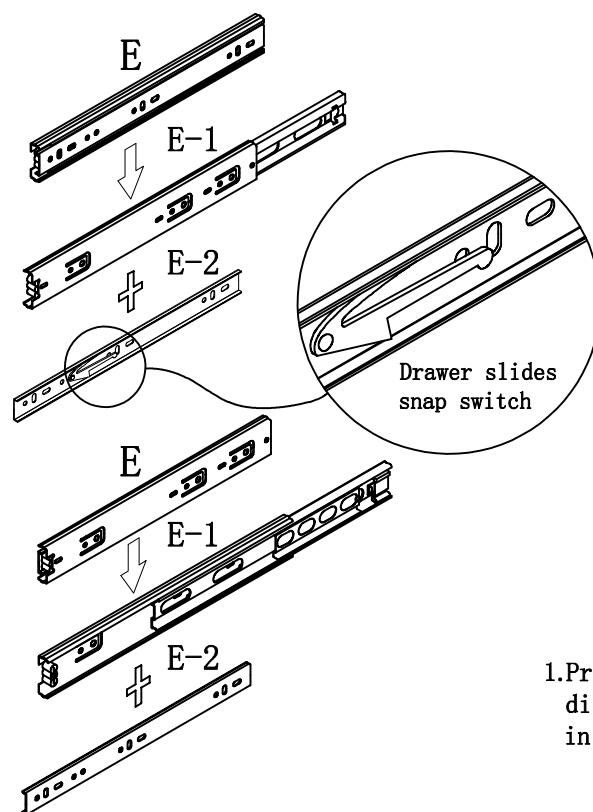


HARDWARE LIST	
Drawer slides	
E 4PCS	

1. Press the slide snap switch, disassemble slide blocks and put them in a place properly for further use.



STEP 4

1. Fix the drawer slide to the side panel with 4*16mm screws.

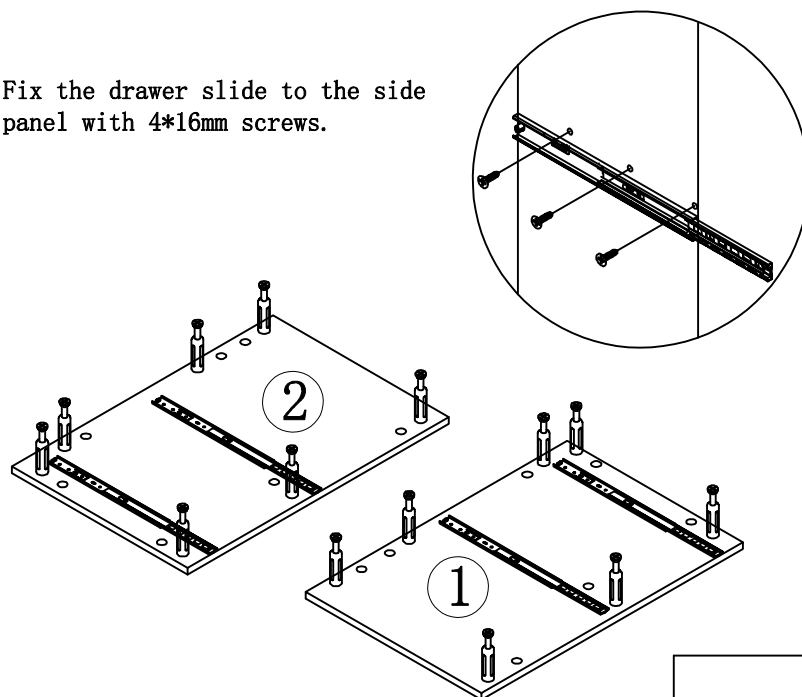


HARDWARE LIST		
4*16mm screw	Drawer slides	
F 12PCS	E-1 4PCS	

STEP 5

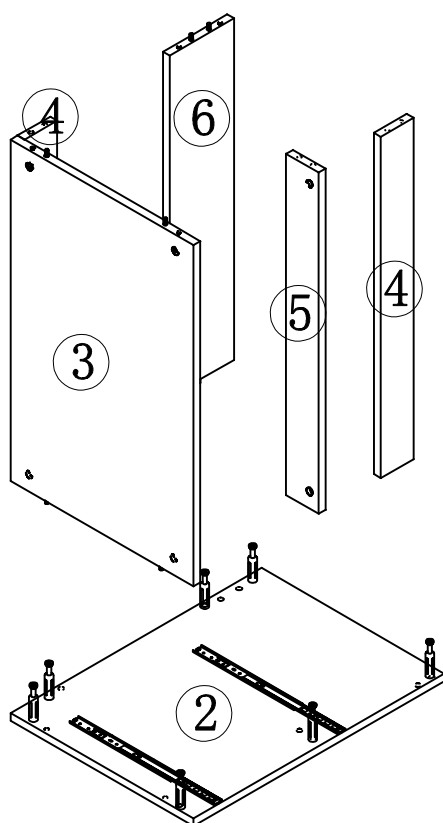

1. Connect No. 3-4-5-6 panel to No. 2 panel tightly with the three-in-one eccentric wheel.





2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.


HARDWARE LIST

Three-in-one eccentric wheel A  7PCS	Three-in-one sticker C  7PCS	
---	---	--

STEP 6

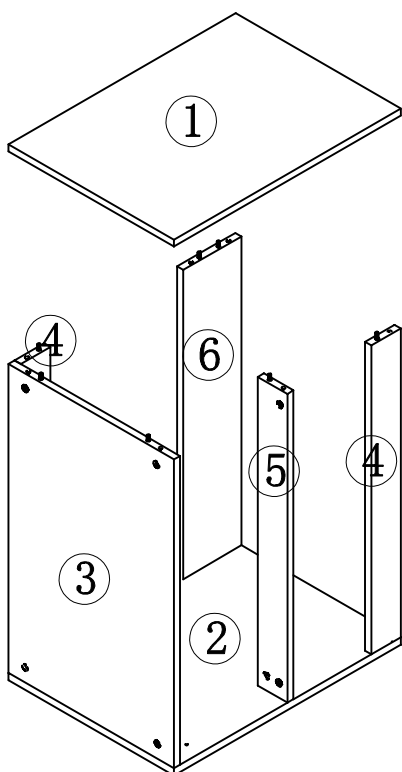

1. Connect No. 1 panel to No. 3-4-5-6 panel tightly with the three-in-one eccentric wheel.





2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.


HARDWARE LIST

Three-in-one eccentric wheel A  7PCS	Three-in-one sticker C  7PCS	
--	--	---

STEP 7

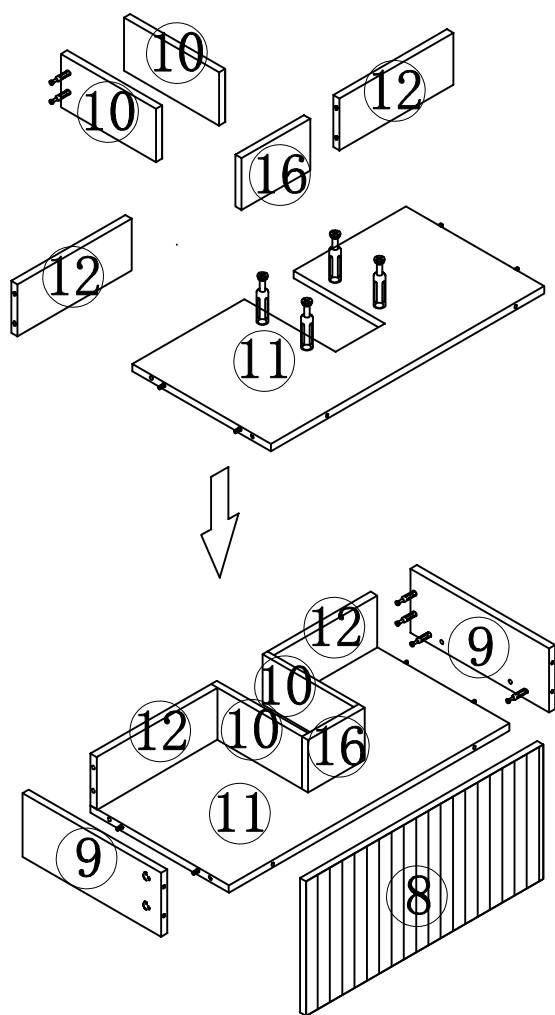


1. Install No. 8-9-10-11-12-16 panels with the three-in-one eccentric wheel tightly.




2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.

HARDWARE LIST


Three-in-one eccentric wheel A  26PCS	Three-in-one sticker C  26PCS	
---	---	---

STEP 8



1. Install the drawer handle with 4*12 mm screws.

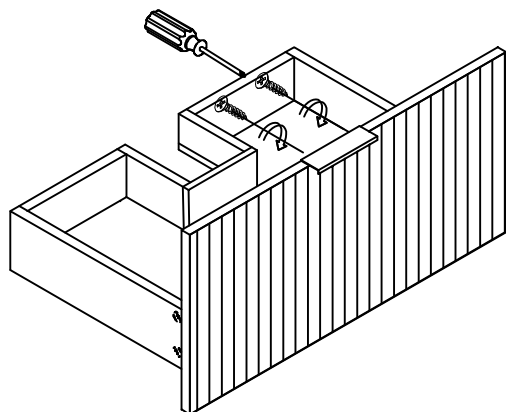


HARDWARE LIST

4*12mm screw G  2PCS	Drawer handle H  1PCS	
--	---	---


STEP 9

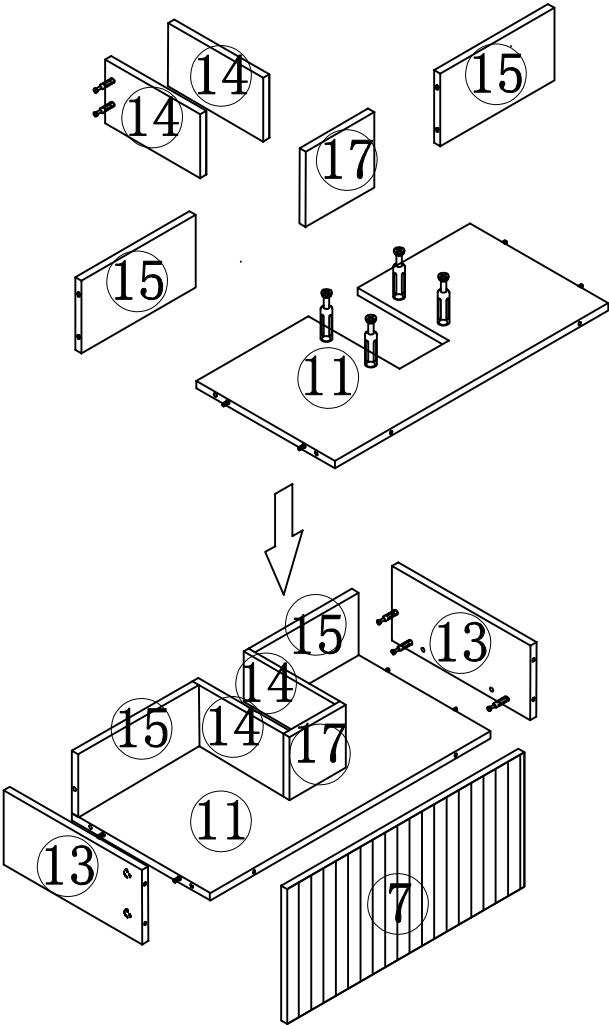

1.Install No.7-11-13-14-15-17 panels with the three-in-one eccentric wheel tightly.





2.Cover the mounting hole of the eccentric wheel with a three-in-one sticker.

HARDWARE LIST		
Three-in-one eccentric wheel A  22PCS	Three-in-one sticker C  22PCS	


STEP 10

1.Install the drawer handle with 4*12 mm screws.

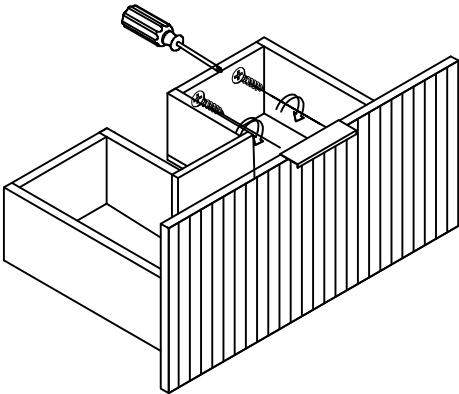


HARDWARE LIST		
4*12mm screw G  2PCS	Drawer handle H  1PCS	


STEP 11

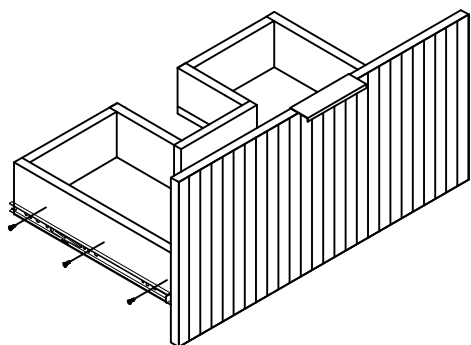

8



1.Lock the spare drawer slide block to the drawer.

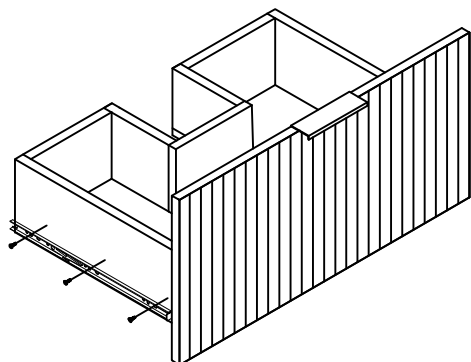

7

HARDWARE LIST

4*16mm screw


Drawer slides

F  12PCS

E-2  4PCS



STEP 12

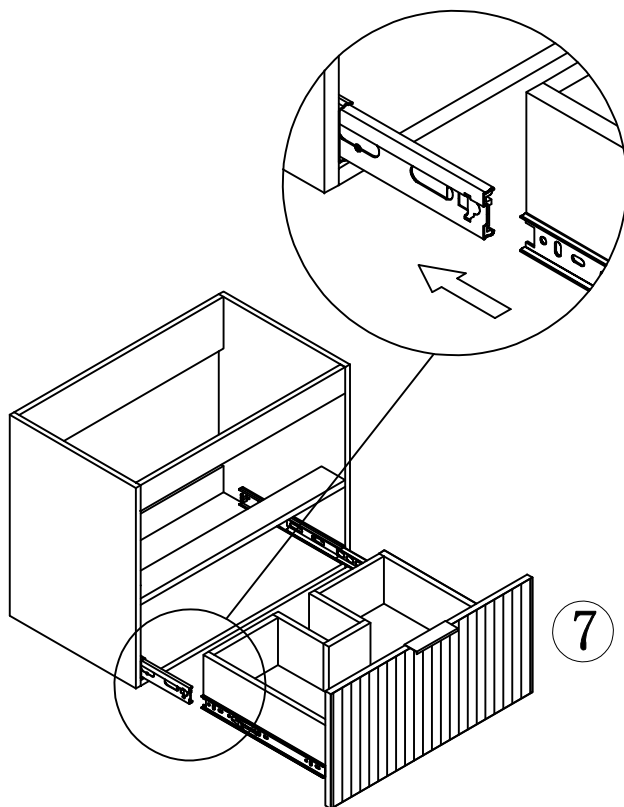


7

1.Align slide block with the trough on the guide rail, press the snap switch and press it forward to install the drawer.


2.If the drawer is uneven or catches the door, loosen the screws, slightly reposition the slides, then retighten to adjust drawer height.

STEP 13

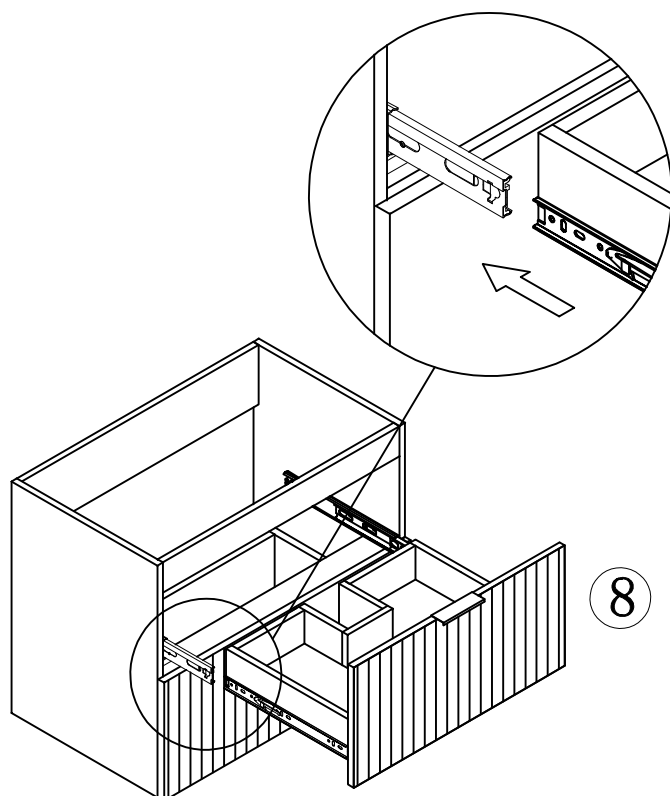

1.Align slide block with the trough on the guide rail, press the snap switch and press it forward to install the drawer.

STEP 14

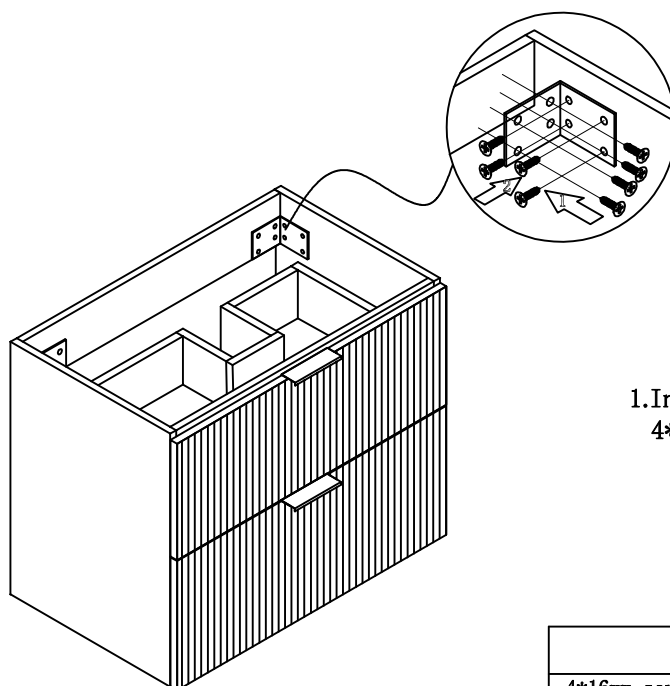

1.Install white angle bracket with 4*16mm screws.


HARDWARE LIST

4*16mm screw

Drawer slides

F  16PCS

I  2PCS





Choking hazard-Small Parts : This unit contains small parts, not for children under 3 years.

Tip-over hazard : Secure finished unit to wall stud using L-Bracket and wall screw (#10*1.5"W/out provided). If a wall stud is not neccessible , Consault your local hardware store for appropriate mounting hardware . Failure to properly install will result in product collapse or tip-over. Serious injury can occur .