


Side Table

Assembly Instruction – Please keep properly for future reference.

If you find any missing boxes, damaged parts, or accessory shortages, please contact the customer service team of your purchasing channel immediately. We will resolve the issue as quickly as possible.

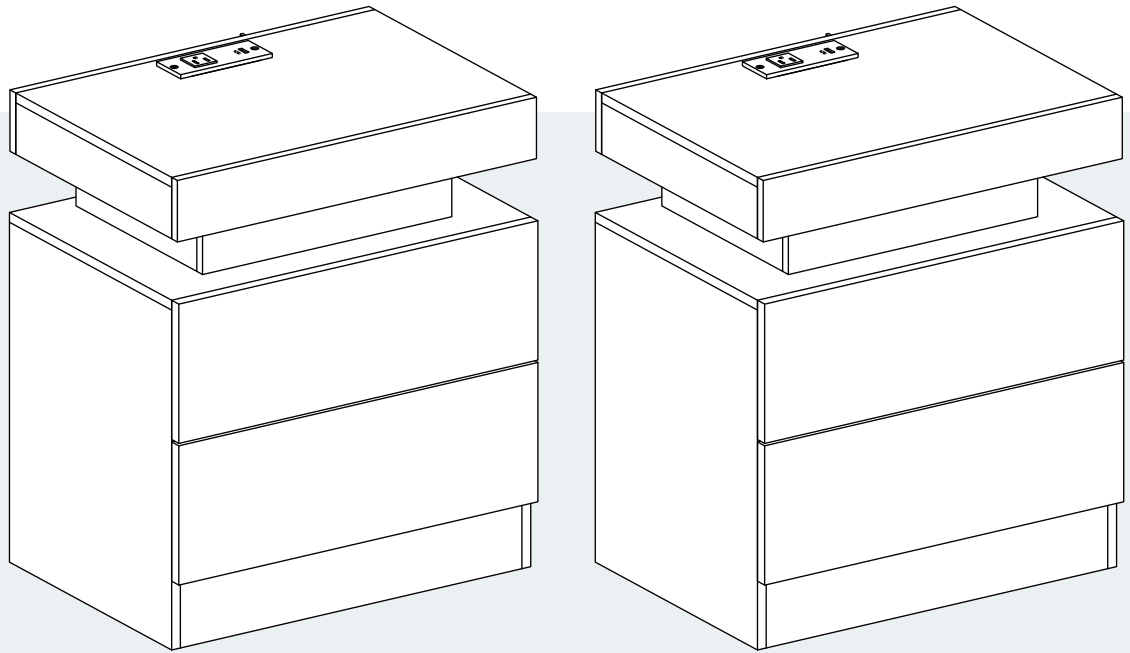

CONTACT US

- **Email: service@grandtunnel.com**

In order to receive assistance more quickly, please provide

THE FOLLOWING INFORMATION:

- Order number
- Purchase platform
- Purchase date
- Detailed description of the issue along with photos (if applicable)

EN

Important – Please read these instructions carefully before starting the installation.

Before Assembly



Thank you for choosing our product!

To ensure a smooth installation process, please read this guide carefully to familiarize yourself with the required tools, materials, and installation steps.

Follow the relevant sections to avoid any damage caused by improper installation, and make sure to review all operation and safety guidelines for correct installation procedures.

Packaging Notice:

If you find any missing boxes, damaged parts, or accessory shortages, please contact the customer service team of your purchasing channel immediately. We will resolve the issue as quickly as possible.

Safety and Care Advice



Important :

Please read these instructions fully before starting assembly.

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and Maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal center.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.
- Regularly check and ensure that all bolts and fittings are tightened properly.

Warning

In order to help prevent overturning, please follow these instructions.

- Use the anti tip strap or wall fixing method provided (if applicable).
- Do not allow children to climb or hang on the furniture.
- Do not open more than one drawer at a time.
- Do not place heavy items in the top drawers.
- Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose.
- Please note that only the anti tip strap is provided. You will need to provide wall plugs and screws applicable for your wall type.

Customer Service Guide



Thank you for choosing our product! We are committed to providing you with excellent service. If you find any missing parts, damaged packaging, or product damage after receiving all packages, please follow the steps below to quickly contact our customer service team. We will do our best to resolve your issue.

1. Missing Parts

Verify Parts:

1. Refer to the “Parts List” in the manual to verify the name, specifications, and quantity of the missing parts.
2. Take a clear photo of the parts list and mark the missing parts with detailed information, e.g., “Missing 5 pieces of M6×30mm screws.”

Contact Us:

By Email:

Send an email to **service@grandtunnel.com**, with the subject line “Missing Parts Issue.” Include the following in the email:

- A description of the missing parts and a photo of the parts list.
- Order details (order number, purchase platform, purchase date).

2. Product or Packaging Damage

If it affects normal use:

Steps:

1. Take clear photos or videos showing the damaged parts and the extent of the damage (multi-angle shots are recommended).
2. Email the photos/videos along with order details to **service@grandtunnel.com**, with the subject line “Product Damage Issue.”

Resolution:

After verification, we will arrange for a replacement part, product exchange, or refund as quickly as possible.

If it does not affect normal use:

Steps:

1. Contact our customer service team (by email: service@grandtunnel.com).
2. Provide a description of the damage and include relevant photos or videos.

Resolution:

We will provide repair guidance or an appropriate compensation plan based on the specific situation.

Contact Us:

Customer Service Email: service@grandtunnel.com

Helpful Tips

To process your issue efficiently, please prepare the following information:

- Order details (order number, purchase platform, purchase date).
- Clear photos or videos.
- We are committed to providing quick and professional solutions, no matter the size of the issue, to ensure your satisfaction.

Thank you for your trust and support!
We hope you enjoy using our product!



Safety Instructions / Warnings

Please read and follow all instructions carefully before installation and use.

- **WARNING: Risk of electric shock – Do not open or disassemble electrical parts.**
- Use only the power cord specifically provided for this product.
Plug rating: 12A, 125V, 60Hz, 1500W. USB output: DC5V, Max 2.1A.
- Do not use with damaged power cords or plugs.
- Keep power cables away from moving or sharp parts of the furniture.
- Do not use extension cords or power strips unless specifically approved for the load.
- This product is **not a toy**. Do not allow children to play with electrical components or moving parts.
- Children under 8 years old must be kept away from the furniture unless continuously supervised.
- Keep remote controls, control switches, and ports **out of children's reach**.
- Always **disconnect the product from power** before cleaning, maintenance, or relocation.
- Do not attempt to open, modify, or repair electrical components.
- **Repairs must be performed by qualified professionals only.**
- Do not insert any foreign objects into openings or mechanisms.
- Clean with a dry cloth or a slightly damp soft cloth. Do not use solvents.
- This product is intended for **indoor use only** in dry environments.
- Do not expose the furniture to moisture, liquids, or direct sunlight.
- Ensure stability and clearance around any moving parts (e.g., lift mechanisms, recliners).
- Do not overload power outlets or USB ports beyond the specified ratings.

FCC Information

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment!

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This product may cause harmful interference.
2. This product must accept any interference received, including interference that may cause undesired operation.

WARNING: Changes or modifications to this product not expressly approved by the party responsible for compliance could void the user's authority to operate the product.


Note: This product has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This product generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the product off and on, the user is encouraged to try to correct the interference by one or more of the following measures.


- Reorient or relocate the receiving antenna.
- Increase the distance between the product and receiver.
- Connect the product to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for assistance.

Components - Panels


Please check you have all the panels listed below




1 (49X32.5X1.2) cm X2




2 (49X7.5X1.2) cm X4




3 (32.5X6.3X1.2) cm X4




4 (34X13.8X1.2) cm X2



5 (25.2X13.8X1.2) cm X2



6 (25.2X13.8X1.2) cm X2




7 (49X33.8X1.2) cm X2



8 (33.8X41.5X1.2) cm X2



9 (33.8X41.5X1.2) cm X2




10 (47.2X34.5X0.3) cm X2




11 (46.4X8X1.2) X4




12 (46.4X8X1.2) cm X2



13 (49X17.4X1.2) cm X2



14 (29.6X12.5X1.2) cm X2



15 (29.6X12.5X1.2) cm X2



16 (41.6X12.5X1.2) cm X2







17 (42.4X29.3X0.3) cm X2

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  7*35mm Cam Bolt x 88	B  Camlock x 88	C  6*30mm Wooden Dowel x 64
D  3.5*12mm Screw x 4	E  5*35mm Screw x 24	F  Strip light x 2
G  Electrical plug board x 2	H  3.5*12mm Screw x 38	I  Plastic buckle x 6
J  Back Panel Stiffener x 8	CL  Slide rail x 4 L300mm	CR  Slide rail x 4 L300mm
DL  Slide rail x 4 L300mm	DR  Slide rail x 4 L300mm	

Tools required



Phillips screwdriver
(medium & large)

Ruler - Use this ruler to help correctly identify the screws

mm

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170



The screws length is measured from the head to the point (30mm screw shown).

0 1 2 3

inch


Using Camlocks

Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.

1


DO NOT OVER TIGHTEN.



Step 2

Push the male camlock into the entry hole.

2

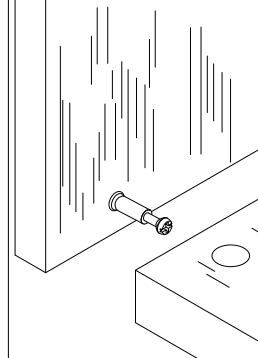


Step 3

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.

3

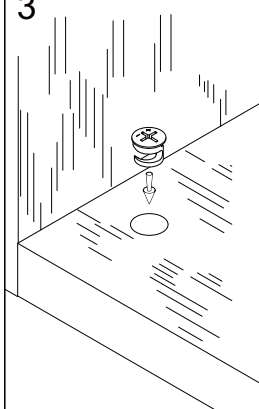


Step 4

Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.


The joint is now secure.

4

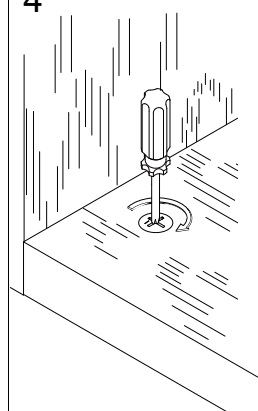

Assembly Instructions

x2





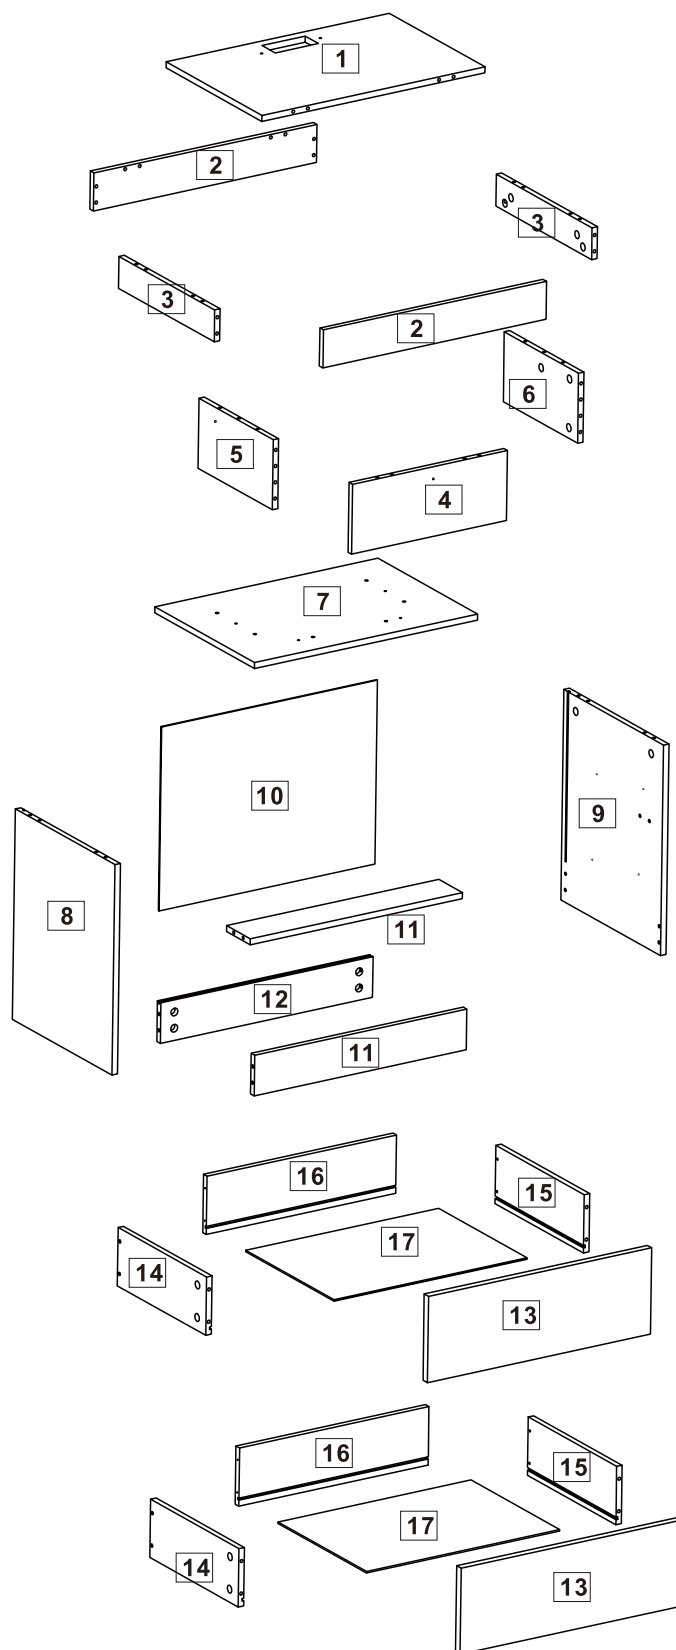


Assembly Instructions

Step 1

CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

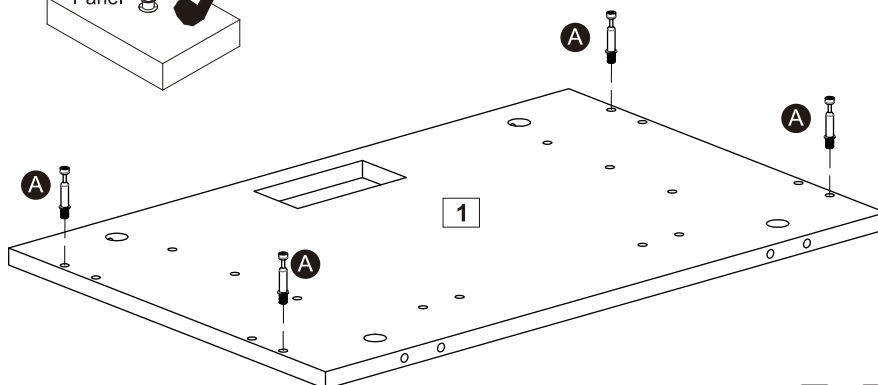






x2

Secure the cam pin (A) to the part (1) with a screwdriver.

Step 2

CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

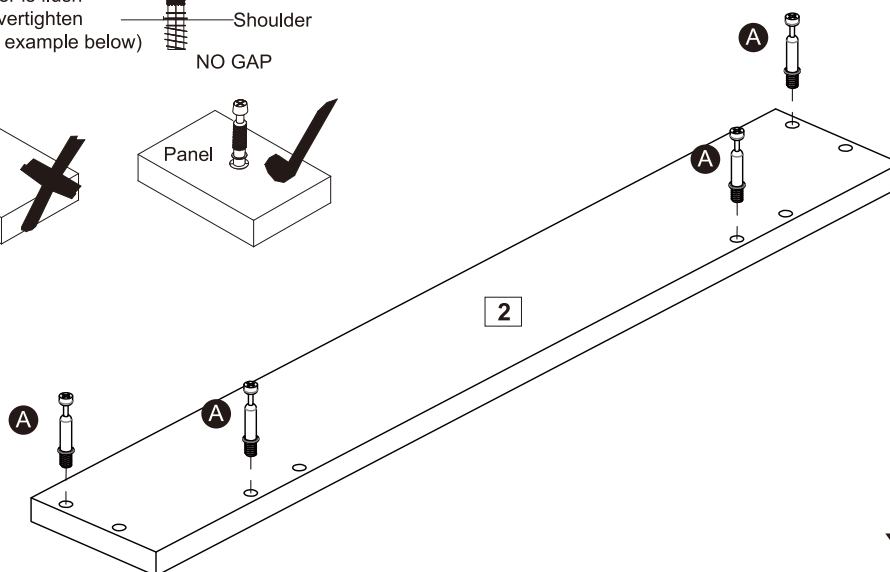


x4

Secure the cam pin (A) to the part (2) with a screwdriver.

Assembly Instructions

Step 3


C 6*30mm
C x 8

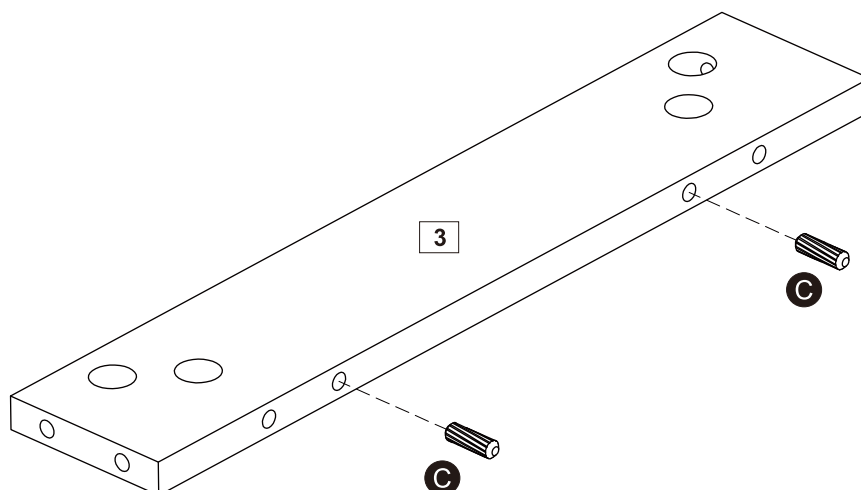


x4

Insert wooden dowel (C) into part (3)

Step 4

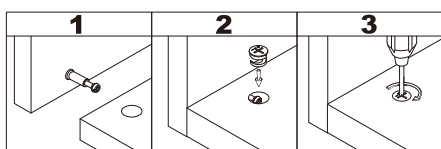

B
B x 8


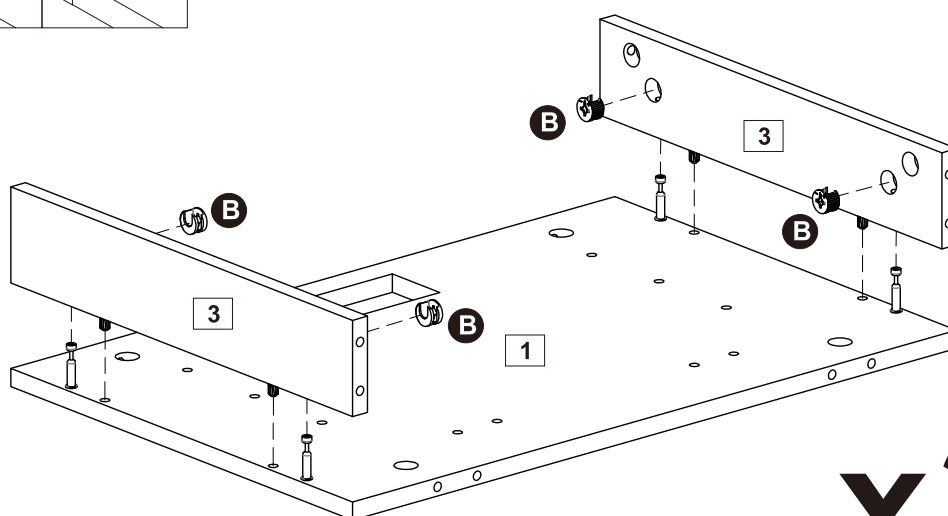


x2

Connect the top plate (1) to the cowl panel (3), insert and lock the cam lock (B).

Assembly Instructions



Step 5

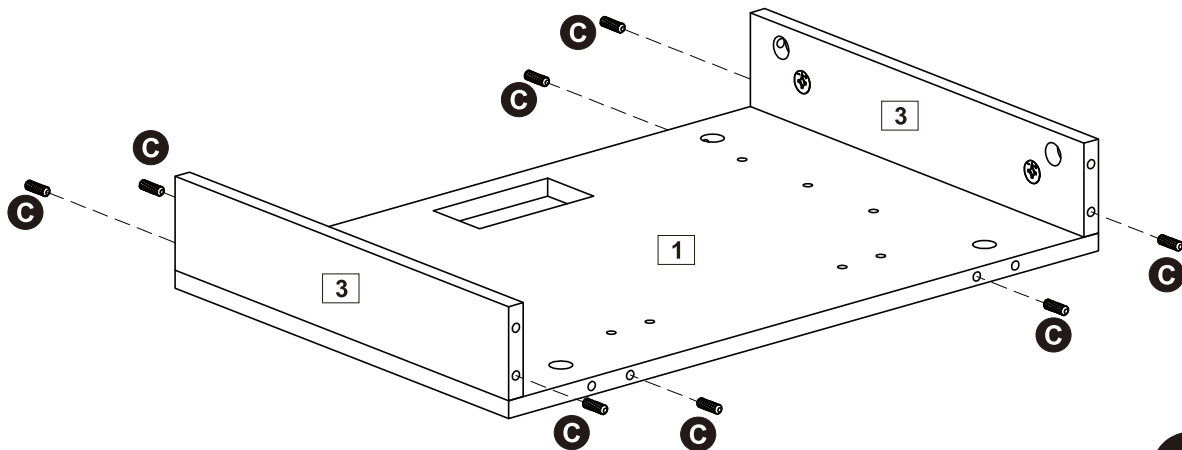

x2

Insert wooden dowel (C) into part (1,3)

Step 6

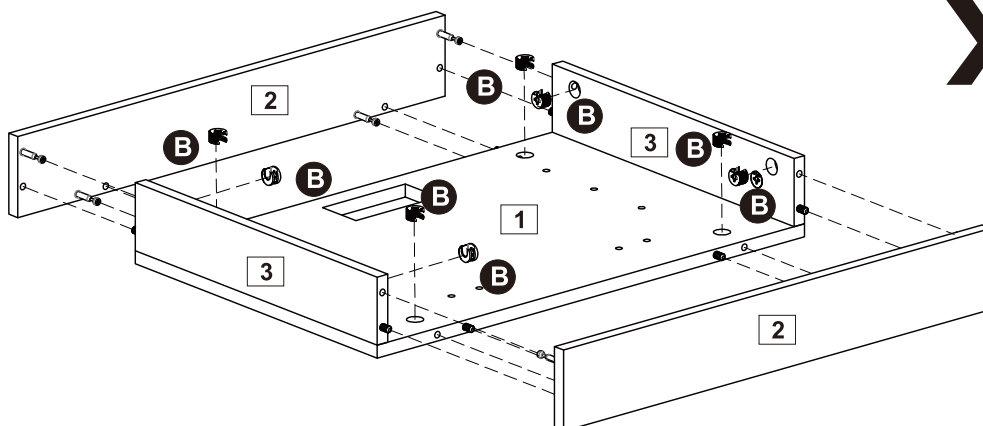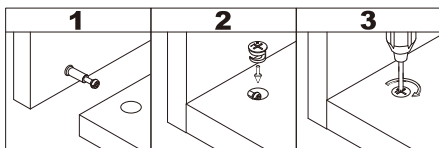

x2





Connect components (2) to components (1, 3), insert and lock cam lock (B).

Assembly Instructions

Step 7

CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

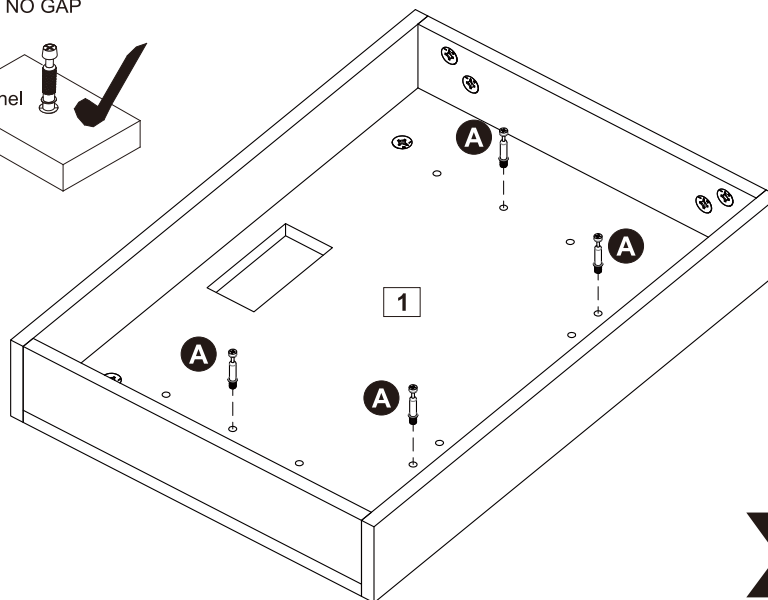


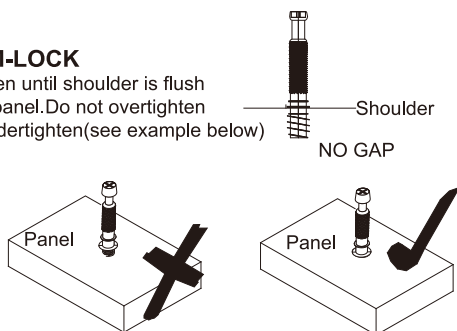


Secure the cam pin (A) to the part (1) with a screwdriver.

Step 8

CAM-LOCK



Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

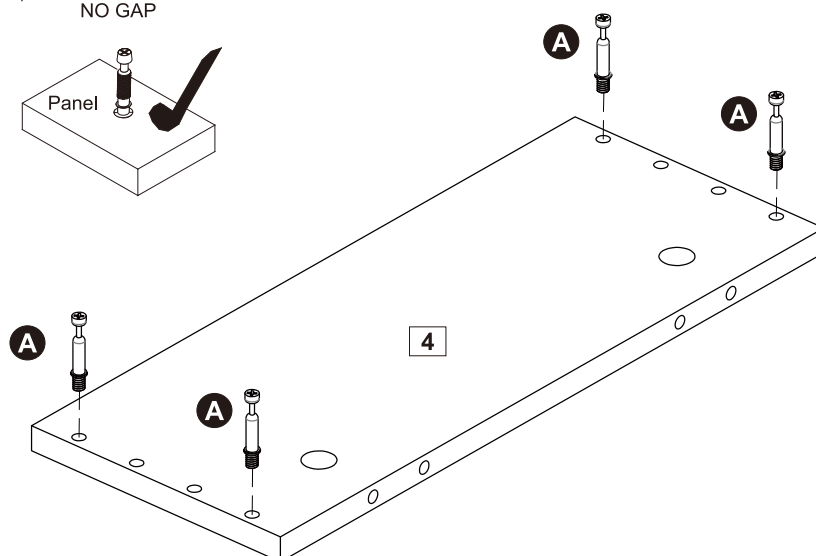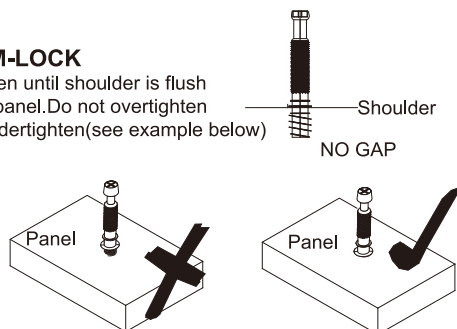

Secure the cam pin (A) to the part (4) with a screwdriver.

Assembly Instructions



Step 9

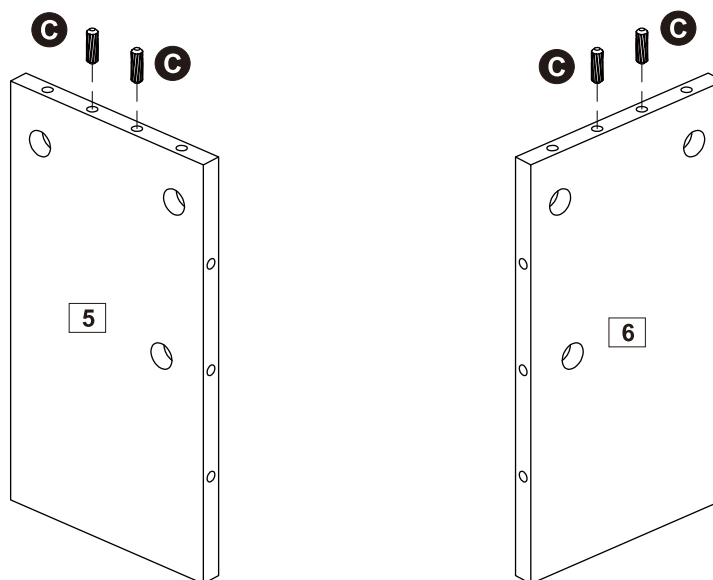

x2

Insert wooden dowel (C) into part (5,6)

Step 10



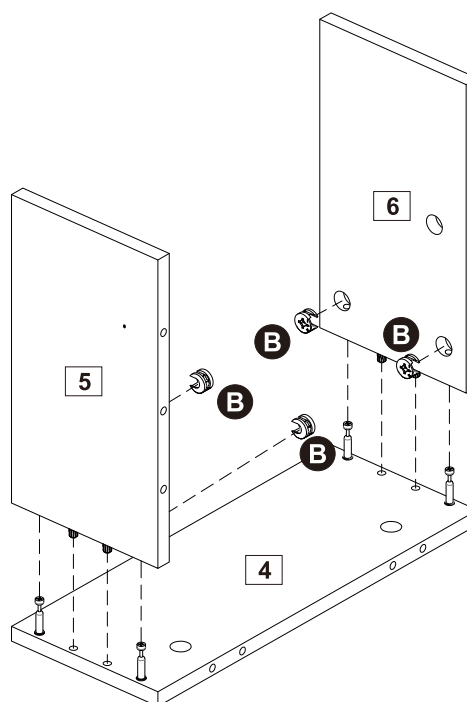
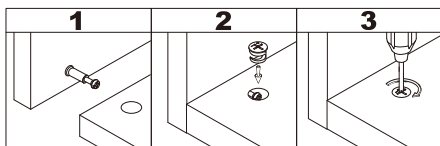


x2

Connect components (4) to components (5, 6), insert and lock cam lock (B).

Assembly Instructions



Step 11

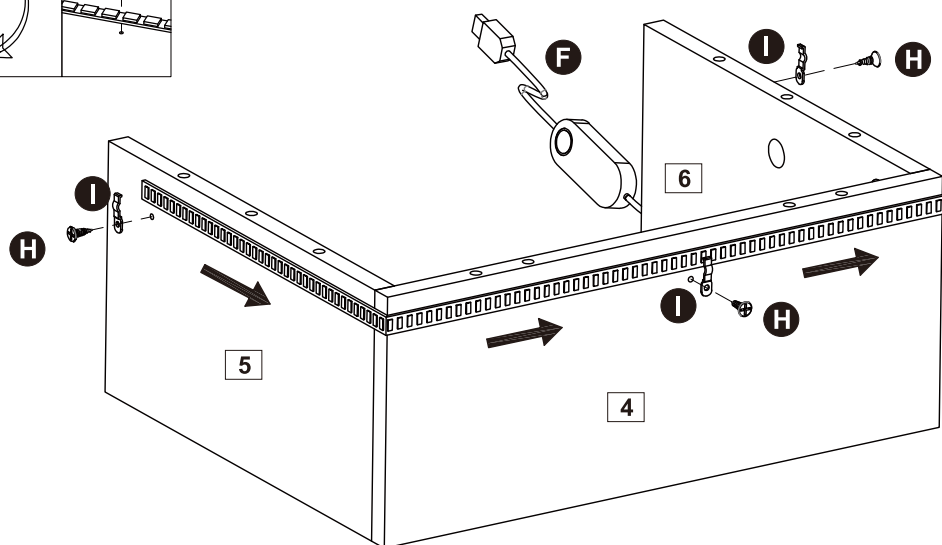

x2

As shown in the figure, the parts (I, H) for the lamp belt (F), secure to (4,5,6).

Step 12

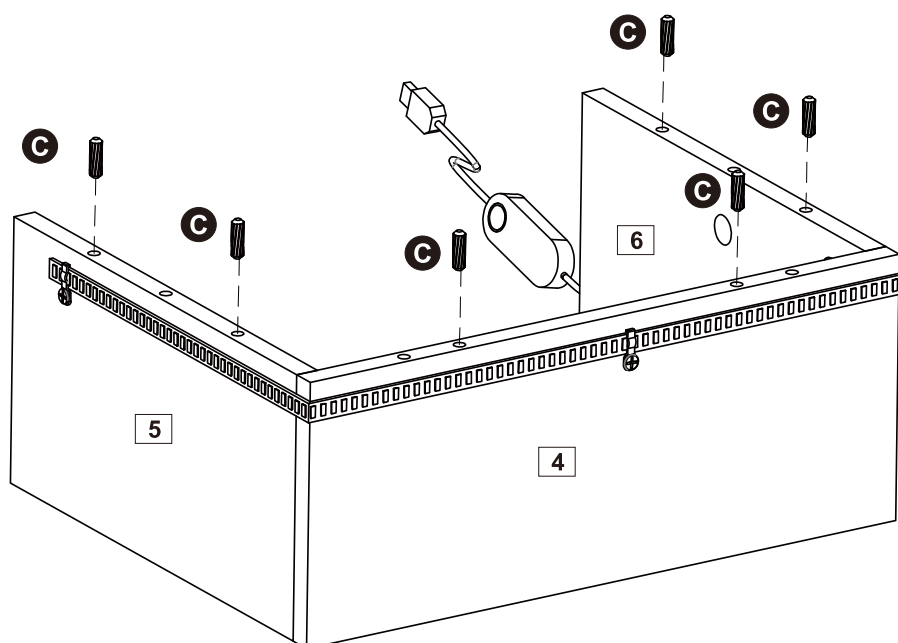


x2


Insert wooden dowel (C) into part (4,5,6)

Assembly Instructions

Step 13

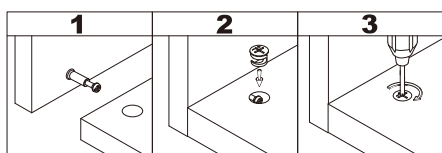

B 
B x 8

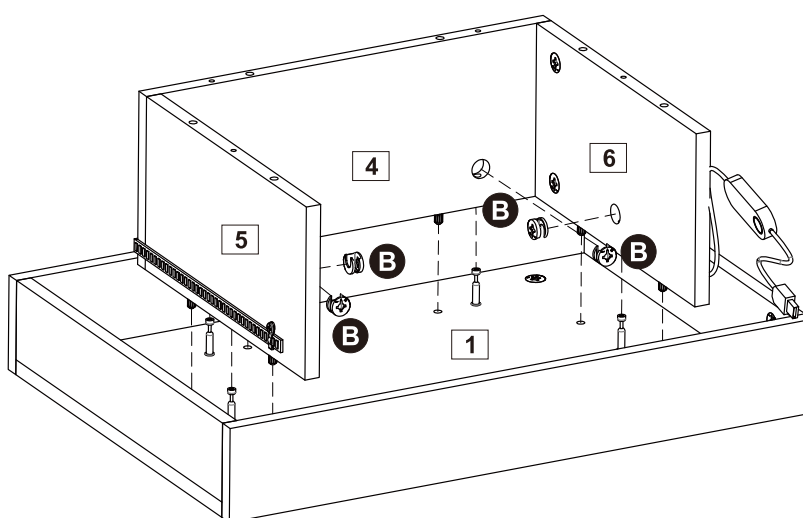


x2

Connect components (4,5,6) to components (1), insert and lock cam lock (B).

Step 14

C 
6*30mm
C x 12

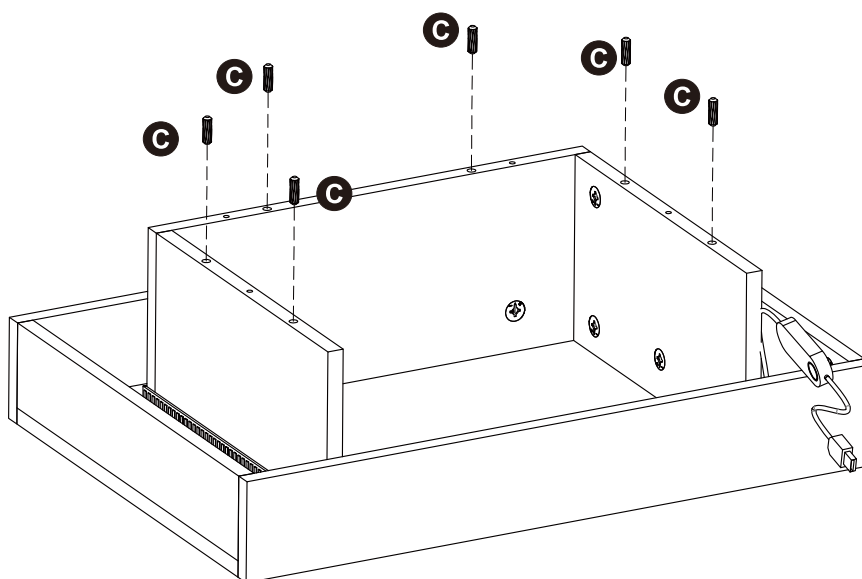


x2

Insert wooden dowel (C) into part (4,5,6)

Assembly Instructions

Step 15

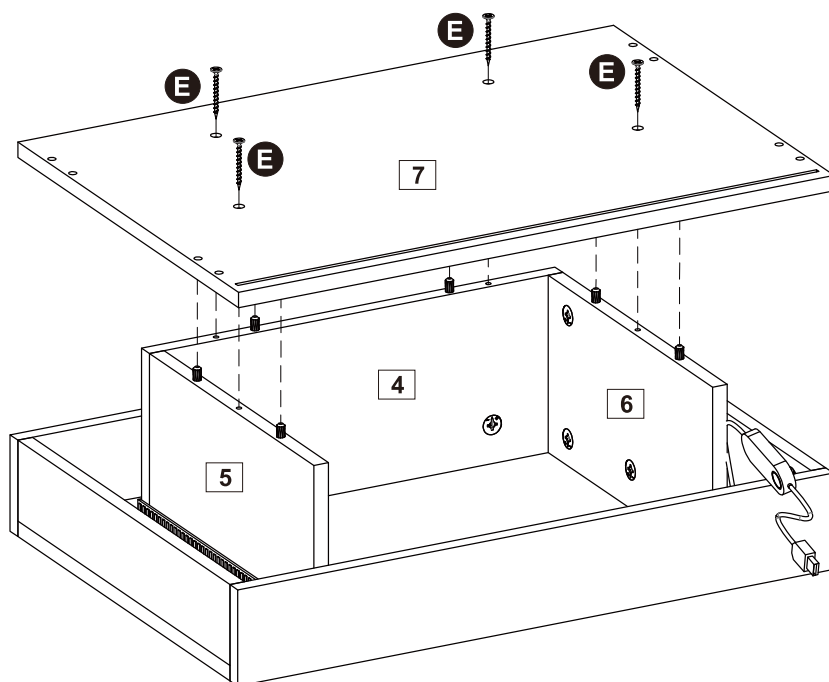

E 5*35mm
E x 8




x2

Secure component (7) with screw (E) using a screwdriver.

Step 16


CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)



A 7*35mm
A x 8


x2

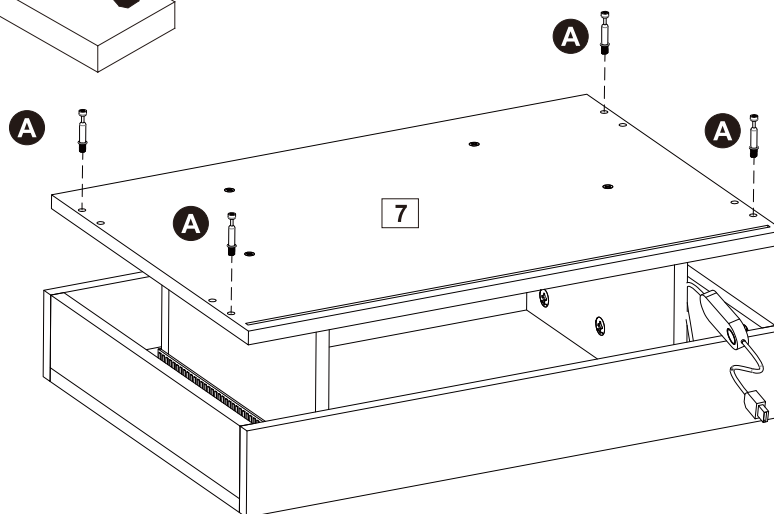

Secure the cam pin (A) to the part (7) with a screwdriver.


Assembly Instructions

Step 17

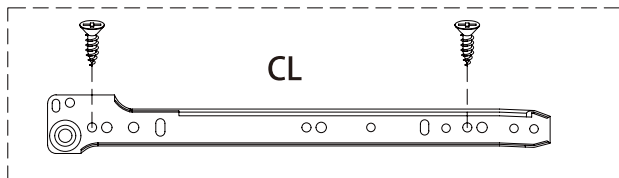

CL x 4

H 3.5*12mm
H x 8

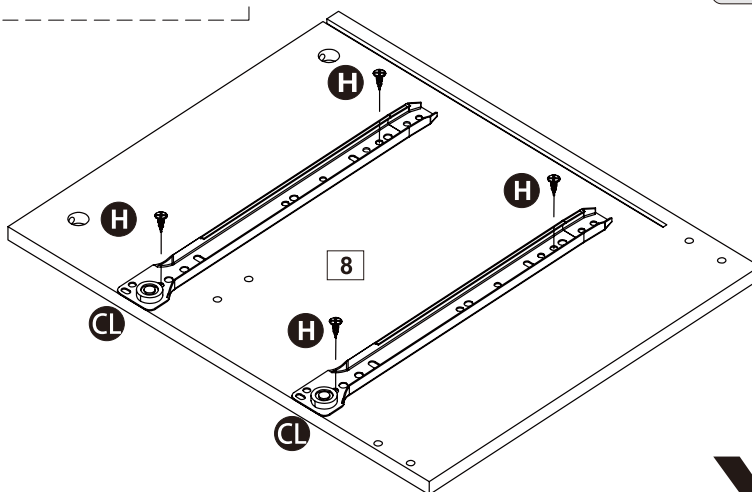




x2

Secure rail (CL) to assembly (8) with screws (H).


Step 18

CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)



A 7*35mm
A x 12



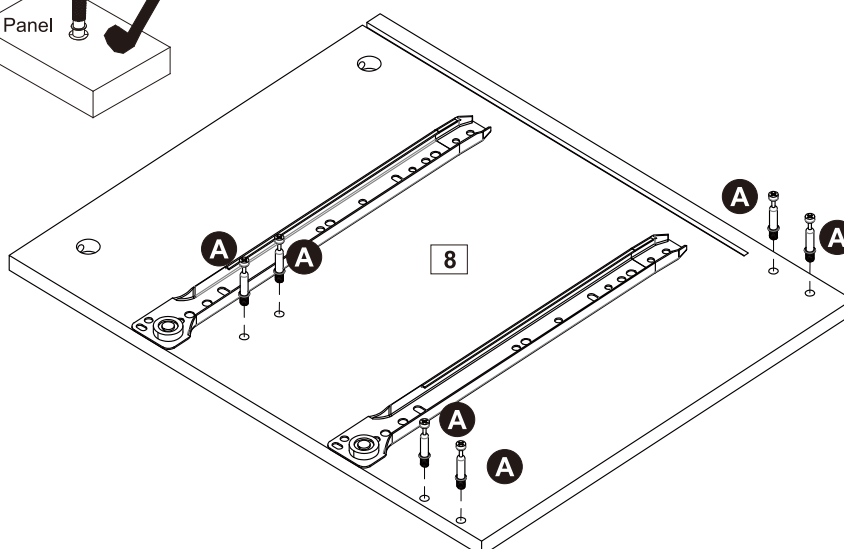


x2

Secure the cam pin (A) to the part (8) with a screwdriver.

Assembly Instructions

Step 19

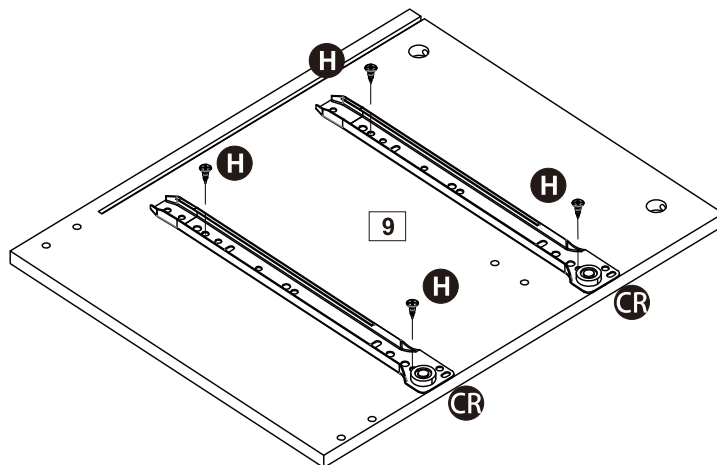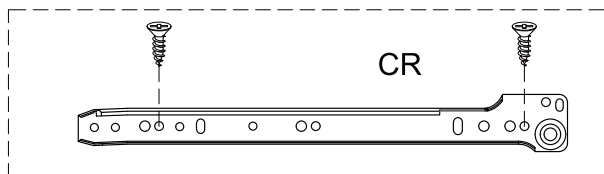






x2

Secure rail (CR) to assembly (9) with screws (H).

Step 20

CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

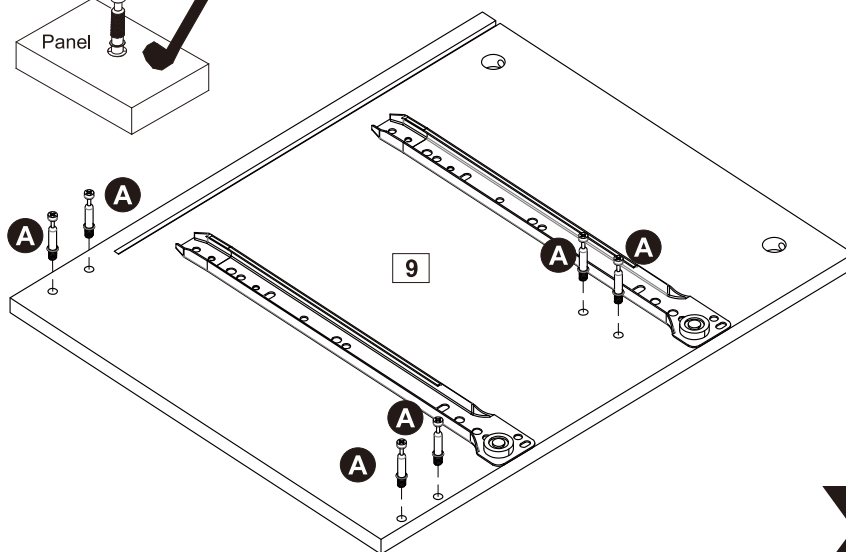


x2


Secure the cam pin (A) to the part (9) with a screwdriver.

Assembly Instructions

Step 21

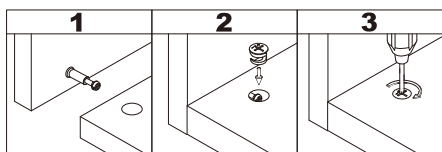

Note that the back plate groove of the component (12) is upward!

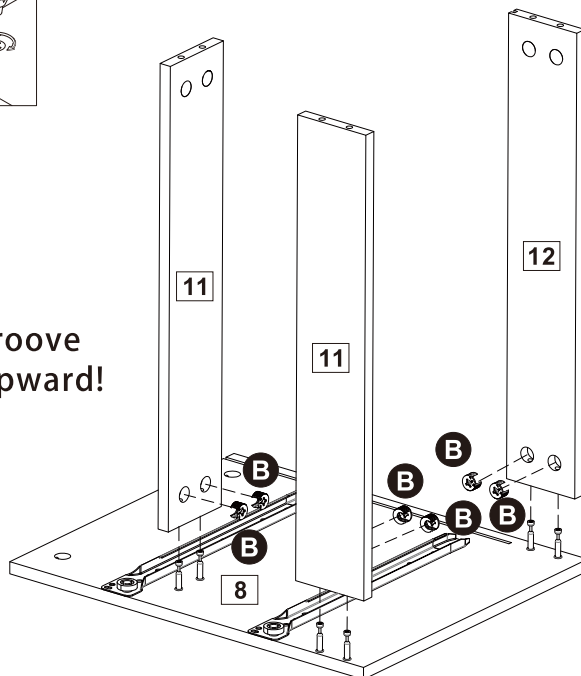

B





B x 12

x2

Connect components (11,12) to components (8), insert and lock cam lock (B).

Step 22

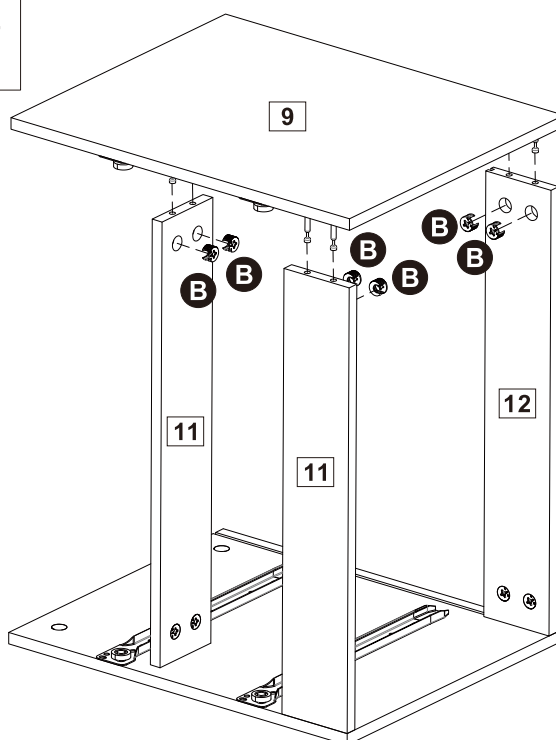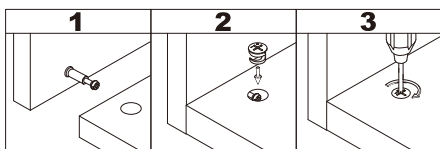

B




B x 12

x2

Connect components (11,12) to components (9), insert and lock cam lock (B).

Assembly Instructions



Step 23

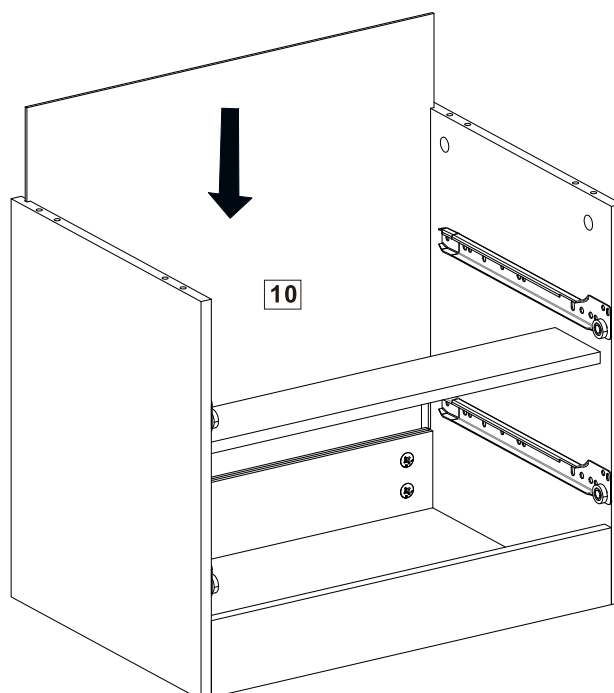

x2

Slide the back plate (10) into the groove as shown.

Step 24

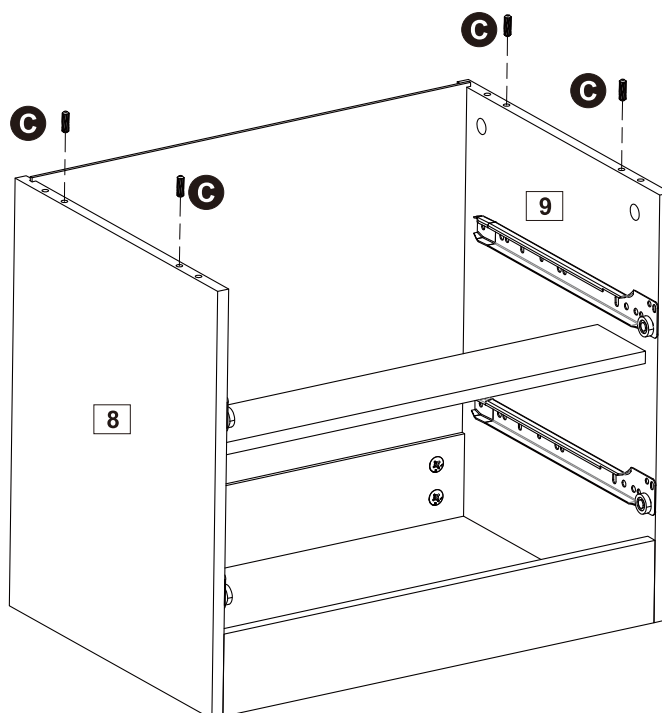


x2

Insert wooden dowel (C) into part (8,9)

Assembly Instructions


Step 25

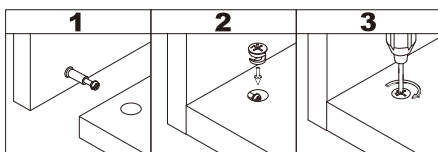

B




B x 8

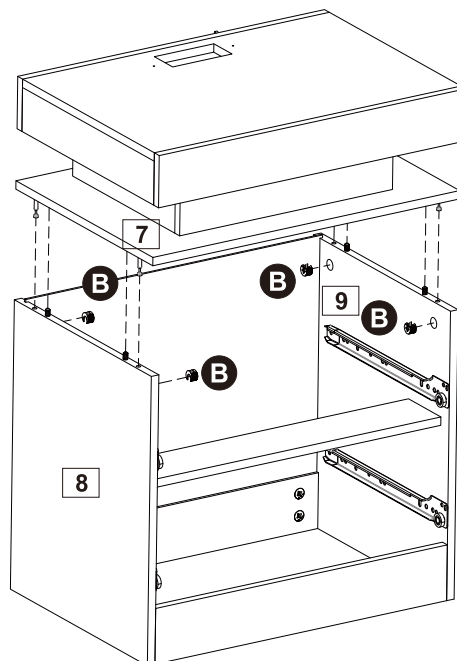

x2

Connect components (8,9) to components (7), insert and lock cam lock (B).


Step 26



J



J x 8

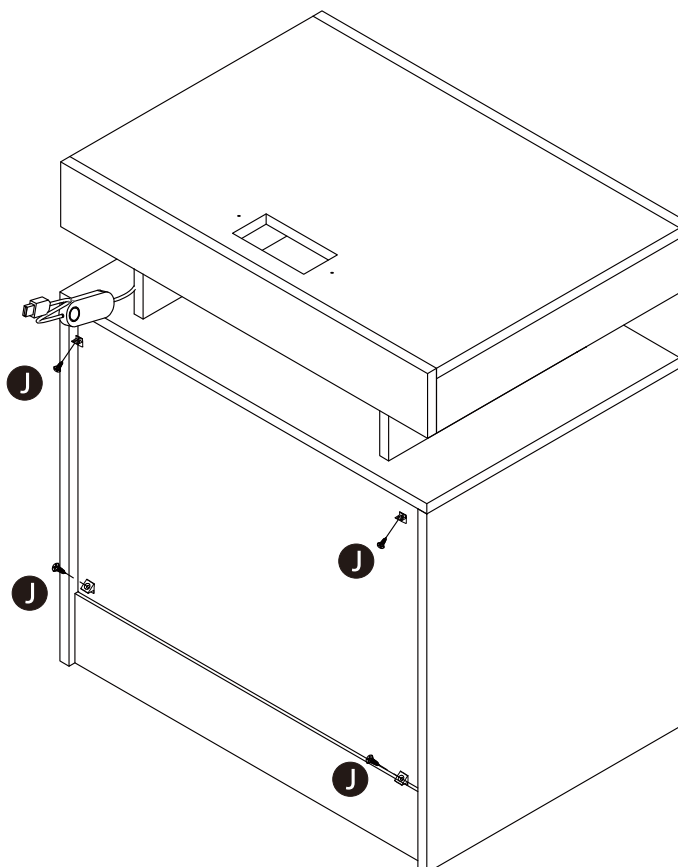


x2

Attach plastic wedge (J) to back panels using screws with a screwdriver.

Assembly Instructions


Step 27

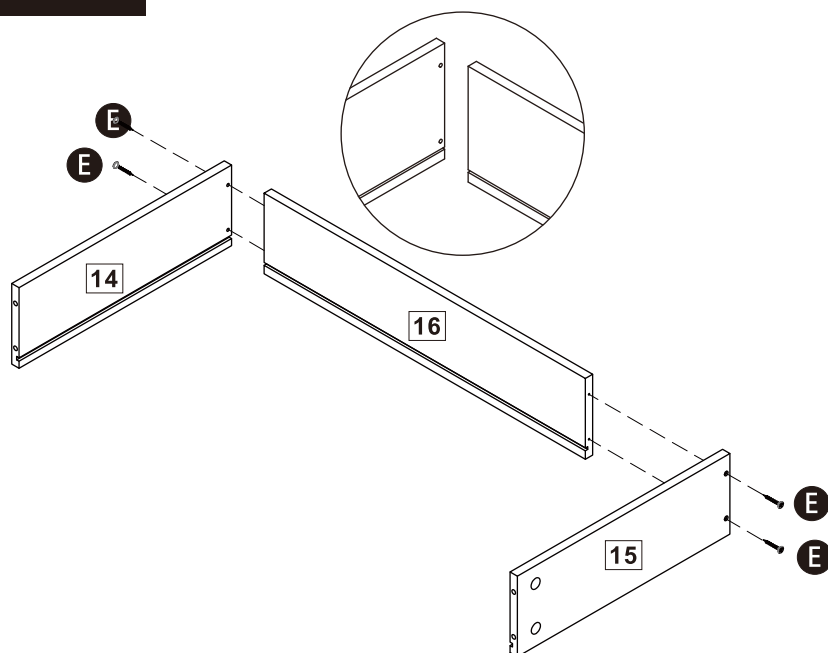

x4

Secure parts (14,15,16) with screwdriver screws.

Step 28

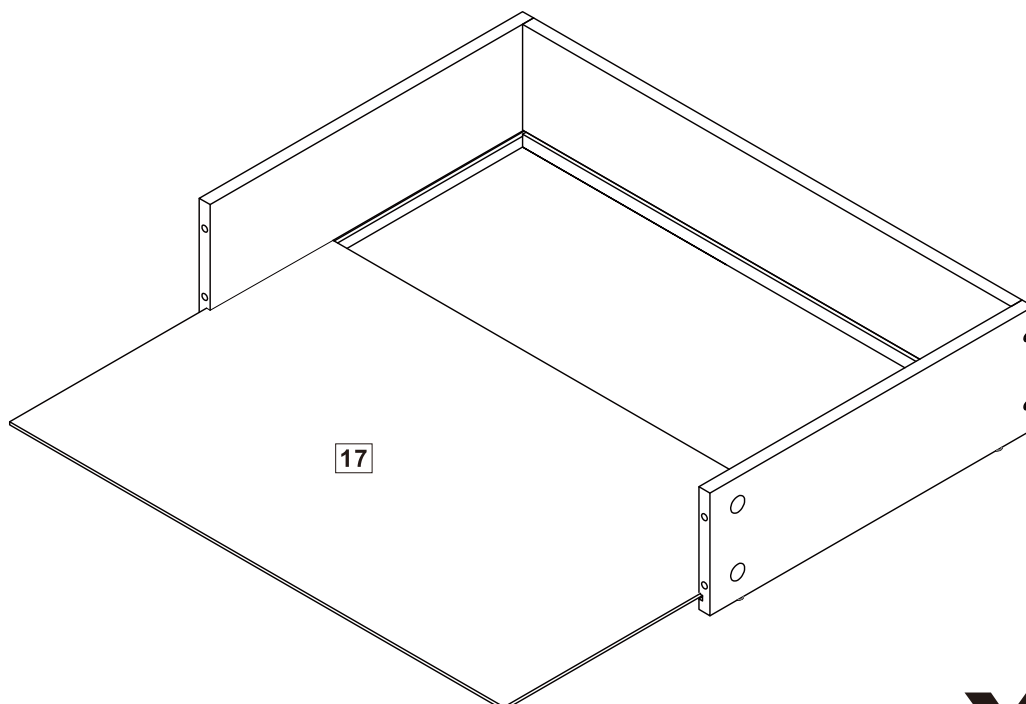

x4



Slide the back panels (17) into grooves as per diagram.

Assembly Instructions

Step 29

CAM-LOCK



Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

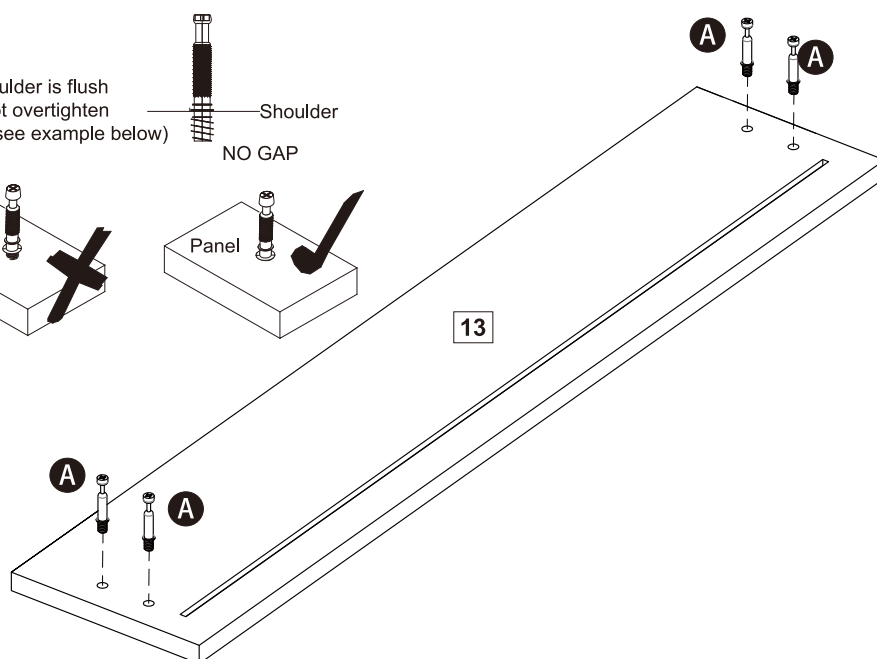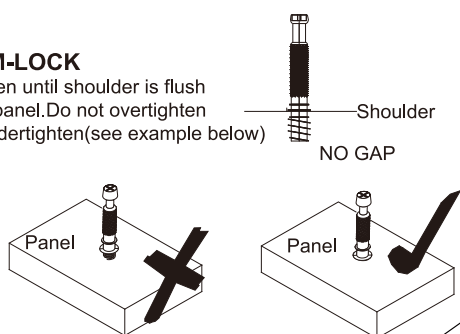

x4

Attach cam bolt (A) to part (13) with a screwdriver.

Step 30

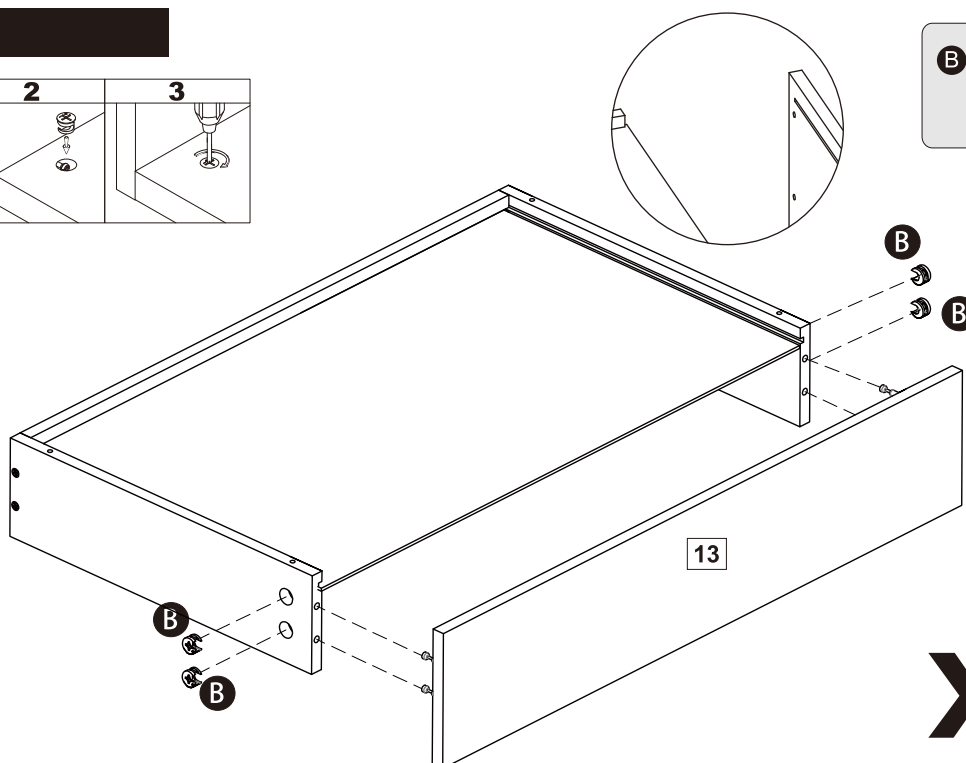
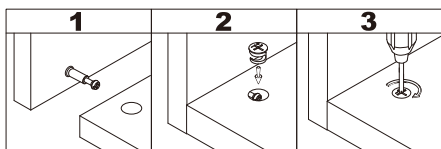


x4

Connect the drawer panel (13) to the drawer side panel and insert the cam lock (B) and lock it.

Assembly Instructions


Step 31

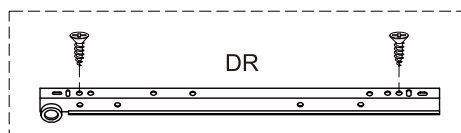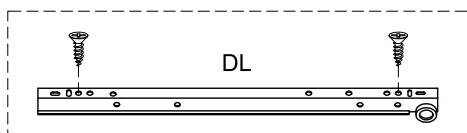


DL x 4



DR x 4



H x 16

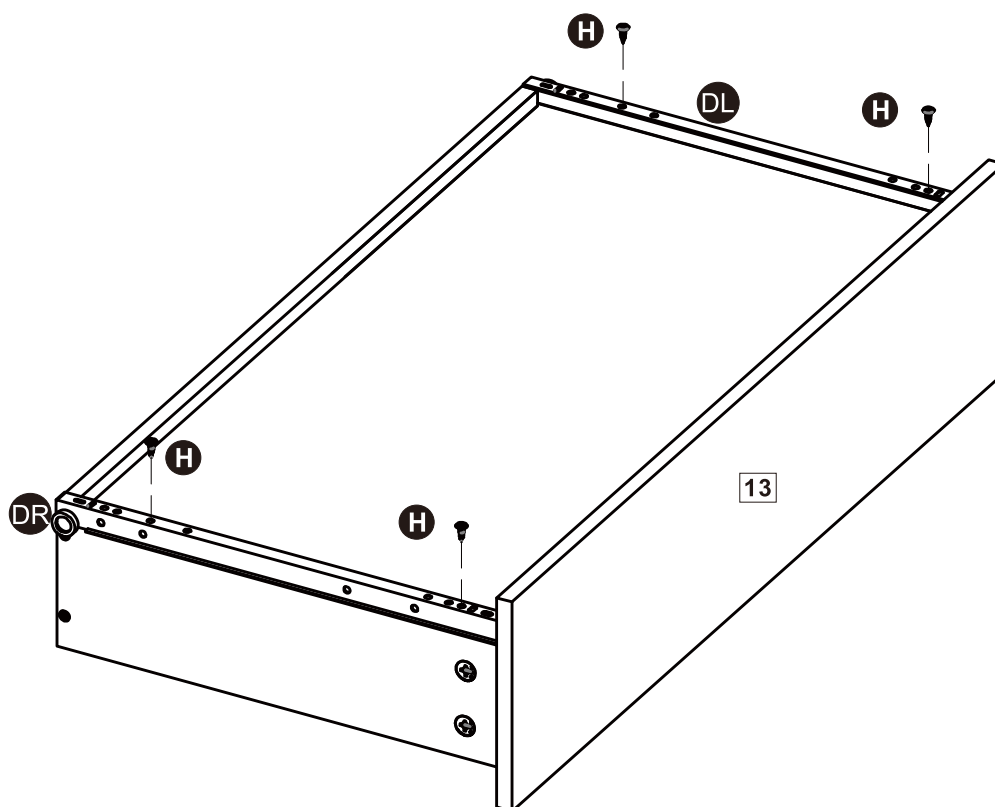


x4

Secure the rails (DL, DR) with screws (H) as shown.


Assembly Instructions

Step 32


Congratulation! You've made to the last step! But don't be too thrilled yet, put on the drawer can be frustrating if you do it wrong. So, take your time and follow the steps below.

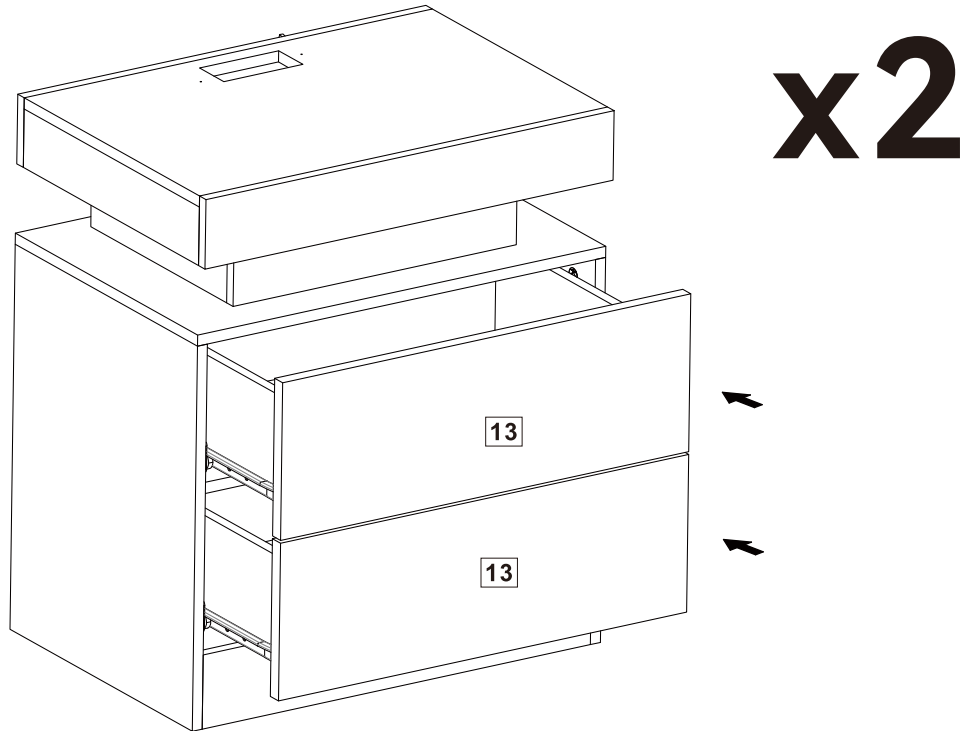


1. Please ensure that you have matched the wheels on BOTH sides of the drawer with the wheels on rails installed BEFORE push in the drawer.



2. If the following occurs, redo the first **two** step.

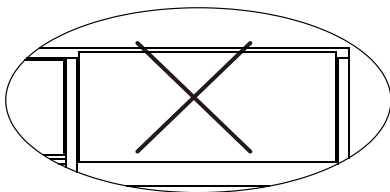

(both wheel are off the rails)


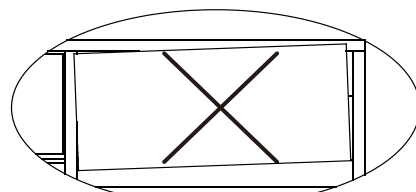


(one wheel is off the rail)


Insert the drawer as shown.

Assembly Instructions

Step 33



Insert the busbar into the panel (1) and secure with screws (D).

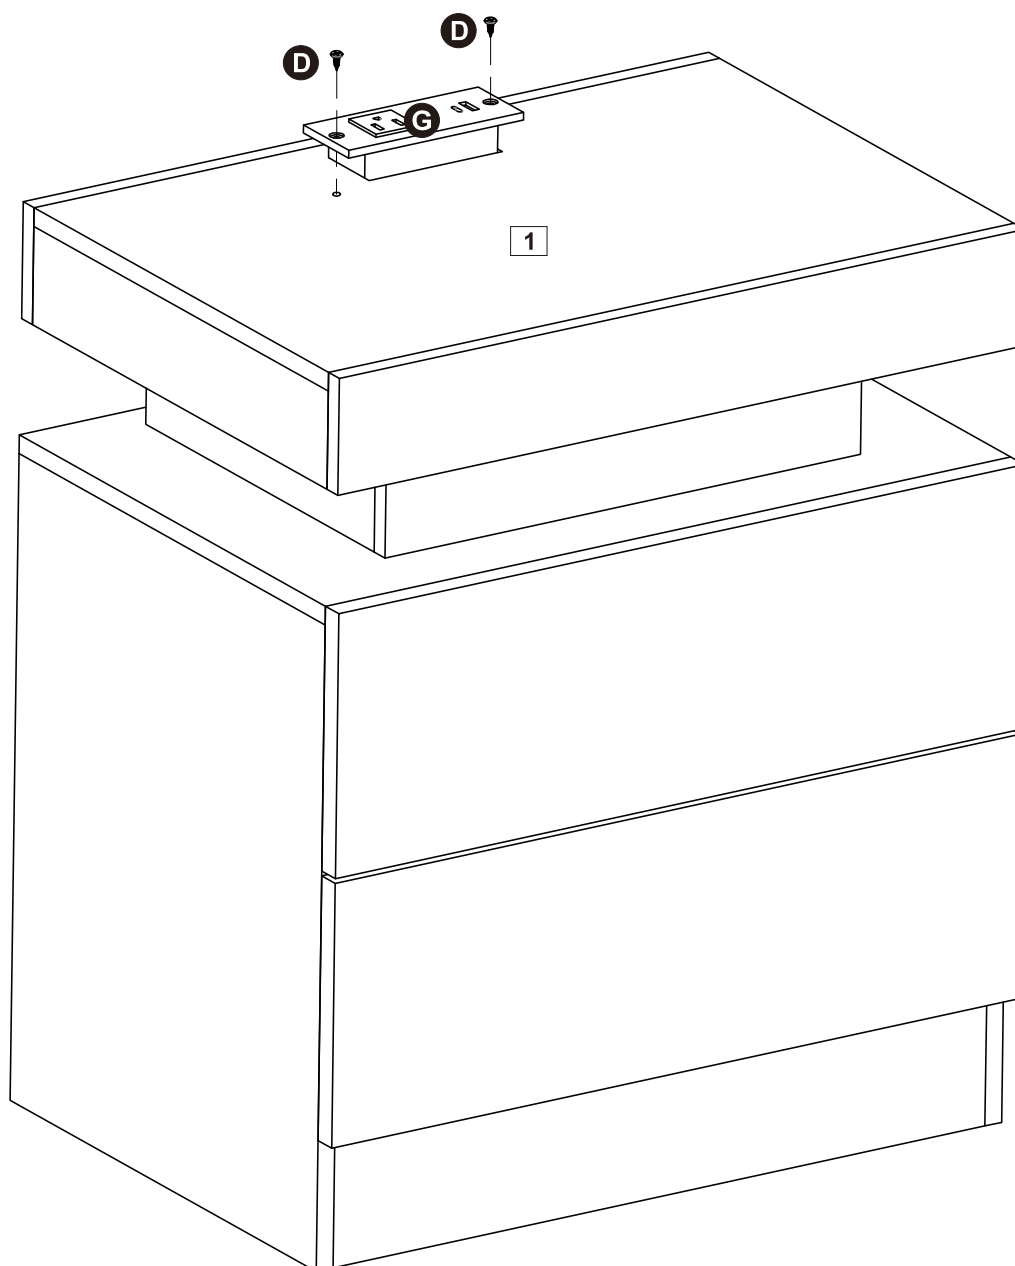

Assembly is complete.

x2

| Side Table

SKU:
BL062G-2A2A0
BL062G-2A2B0
BL062G-2A2C0

V2.0