


LT2620747 Assembly Instruction


1 Preparing the mounting bar

- Carefully unpack and lay all parts on a clean, level surface.
- Unscrew the preassembled canopy nut (DD) from the mounting bar (CC).



2 Installing the mounting bar

- Install the mounting bar (CC) to the junction box (not included) with two junction box screws (AA).

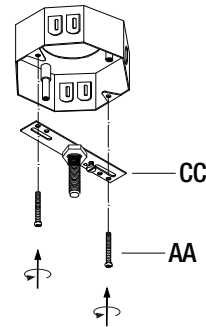


3 Making the electrical connections



NOTE: Make the connections to a 120V AC 60Hz circuit.

- Connect the white wires from the fixture to the white wire of the supply circuit. Connect the black wires from the fixture to the black wire of the supply circuit. Wrap the bare copper grounding wire from the fixture around the green screw on the mounting bracket, then connect it to the grounding conductor of the supply circuit. Use U.L./C.S.A. listed wire connectors (BB) suitable for the size, type and number of conductors. Secure the wire connectors (BB) with U.L./C.S.A. listed electrical tape (not included).

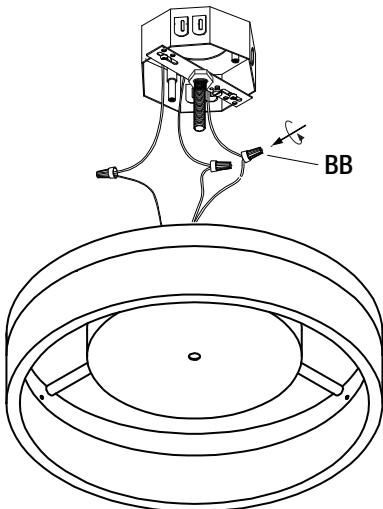

4 Installing the fixture assembly

- Place the fixture assembly (A) against the mounting surface, allowing the preassembled screw on the mounting bar (CC) to pass through the fixture assembly (A). Secure with the previously removed canopy nut (DD).

