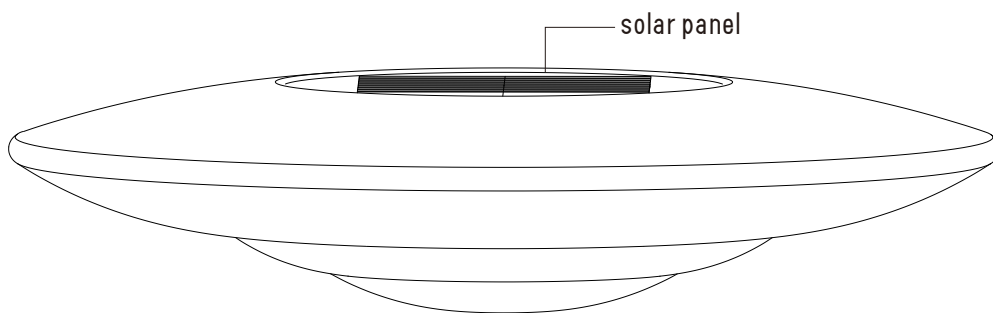# USER MANUAL

CAUTION

1. PLEASE READ THROUGH THIS USER MANUAL BEFORE USING THIS LIGHT.
2. REMOTE CONTROLLER IS NOT WATERPROOF, KEEP IT AWAY FROM WATER.
3. THIS LIGHT IS DESIGNED TO FLOAT IN A SWIMMING POOL WITH THE SOLAR PANEL FACING UPWARD; DO NOT SUBMERGE IT IN WATER OR USE IT WITH THE SOLAR PANEL FACING DOWNWARD.

SOLAR LED FLOATING POOL LIGHT

solar panel

REMOTE CONTROLLER

decrease brightness

increase brightness

turn off

turn on

16 colors flash transition

single color strobe

16 colors fade transition

16 colors smooth transition

BRIGHTNESS BUTTON
Press ON button and turn on this light firstly, then press brightness button to adjust brightness.

RGBW COLOR BUTTON
Press ON button and turn on this light firstly, then press any color button.

MODE BUTTON
1. Press ON button and turn on this light firstly, then press mode button.
2. For FLASH/FADE/SMOOTH buttons, color changes among RGBW.
3. For STROBE button, press color button to select color, then press
STROBE button.

ON/OFF BUTTON
1. This light has dusk to dawn function, it will turn on when ON button is pressed, under bright ambience of daytime,
the light will last 10secs and turn off; under dim ambience of night, the light will last till dawn.
2. Before using other buttons, press ON button to turn on this light firstly. Other buttons can only work when the light is on.
3. Press OFF button and turn off this light completely. The light will not turn on even at dusk, untill ON button is pressed.
4. This light will save your last choice, no matter ON/OFF Cylce or dusk/dawn Cycle, untill you change it.

NOTE

1. Only remove the plastic sheet from remote controller right before first use.
2. To control this light effectively, point the remote controller direclty to the light. Remote controller works best within distance of 16ft. If the working distance of remote controller decays greatly, change a new 3V CR2025 button cell for remote controller.
3. Before long time storage, turn this light off by pressing OFF button and take off the button cell from remote controller.

SPECIFICATION OF SOLAR LED FLOATING POOL LIGHT

SIZE	LIGHT COLOR	LIGHT MOTION MODE	LIGHT BRIGHTNESS
φ 9. 84in×2.28in	16 Colors	4 Models	10 Levels

SOLAR CHARING TIME	LIGHTING TIME	BATTERY CAPACITY	POWER
8~10 hours (under direct sunlight)	10~12 hours (on full charge)	3.7V 1800mAh	Max 1.2W

FAULT ANALYSIS

FAULT	ANALYSIS
This light cannot be turn on with remote controller.	1, Point remote controller directly to the light, get closer to the light. 2, Put the light directly under sunlight over 8 hours to charge the battery. 3, Change a new 3V CR2025 button cell for remote controller.

ITEMS IN PACKAGE

3 × SOLAR LED FLOATING POOL LIGHT   1 × REMOTE CONTROLLER   1 × USER MANUAL

LIMITED WARRANTY

The manufacturer warrants all of its lighting fixtures against defects in materials and workmanship for one year from the date of purchase. If within this period the product is found to be defective in material or workmanship, the product must be returned, with a copy of the original sales receipt as proof of purchase. The manufacturer will, at its option, replace or refund the original purchase price to the consumer. This warranty does not cover fixtures becoming defective due to misuse, accidental damage, improper handling and/or installation and specifically excludes liability for direct, incidental or consequential damages. As some states do not allow exclusions or limitations on an implied warranty, the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights that vary from state to state.

WARNING	
· **INGESTION HAZARD:** This product contains a button cell or coin battery. · **DEATH** or serious injury can occur if ingested. · A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours.** · Keep new and used batteries **OUT OF REACH OF CHILDREN.** · **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.	