

Warnings and Cautions

- ① Before installation, make sure the power supply is turned off to avoid electric shock. If you're not sure, consult an electrician.
- ② Choose a suitable location for installation. Make sure the wall is strong enough to support the weight of the lamp.
- ③ Carefully read the installation instructions provided with the lamp to ensure you have all the necessary tools and hardware.
- ④ Mount the mounting plate securely onto the wall using screws and a screwdriver. Make sure it is level.
- ⑤ Connect the wires of the lamp to the corresponding wires in the wall. Ensure that the connections are tight and there are no loose or broken wires.
- ⑥ Attach the lamp fixture onto the mounting plate, following the instructions provided.
- ⑦ Finally, turn on the power supply and test the lamp to make sure it is working properly.

WARNING:

Always turn off the power supply before beginning installation to avoid the risk of electric shock. If you are unsure about anything, consult a licensed electrician.

CAUTION:

Do not attempt to install the lamp on a weak or unstable wall. Make sure the mounting plate is securely fastened to a strong, stable surface.

Package Contents

PREPARATION:

Identify and inspect all parts before beginning the installation. Missing or damaged parts? Contact your original place of purchase.

- ① Check Orders Detail
- ② Select Problem with Order
- ③ Choose Topic
- ④ Contact Seller

PARTS BAG :

 Wire Connector x3

 Screws x2

 White Glove x1

 Hex Screwdriver x1

1. Free Warranty Policy:

Basic Terms

- ① The warranty period is valid from either the date of purchase or delivery, whichever is later. Customers are required to keep the purchase invoice or related documents as a basis for warranty service.
- ② The warranty policy is only applicable to products purchased and used in the continental United States. Moreover, the warranty policy does not cover products purchased from other vendors on other platforms.
- ③ does not provide a warranty for product-related components, nor does it offer any replacement products for items sold individually or separately from the complete package.

2. Warranty period:


The warranty period for products is 2 years from the date of purchase, during which customers can enjoy free warranty services provided

If your product is found to be faulty due to poor materials, workmanship, or functionality after inspection, we will determine the appropriate course of action. This may include replacement parts, a full machine replacement, or a full refund. If you encounter the following problems during the use of our products, we will provide free repair services:

- ① Scratches;
- ② Integrated LED chip not working;
- ③ Broken products (photo evidence required);
- ④ Missing essential accessories from the package (photo evidence required);
- ⑤ Damage caused by workmanship and quality issues during installation (photo evidence required).

STEP 4

- Install crystal lamp posts

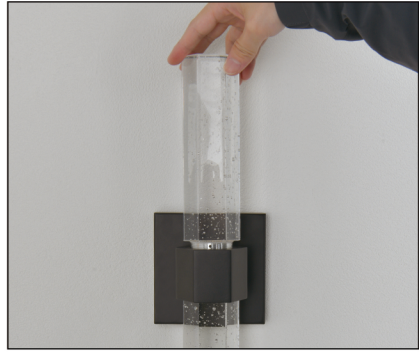


4. Install crystal lamp posts

Align the threads on the crystal column with the threads on the lamp holder, and twist them in vertically or horizontally (for horizontal installation) to align the edges of the crystal and lamp holder. Simply tighten it until it is secure and there are no gaps. If the column is twisted all the way to the bottom but the edges are not aligned, you can loosen the crystal column slightly by twisting it back.

STEP 5

- Secure

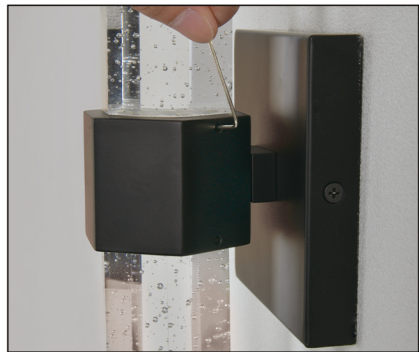

5. Secure crystal lamp post

Fixed crystal lamp post Once you have installed the crystal column of the wall lamp, simply use the small hex screwdriver provided to tighten the screws inside the lamp body.

Product Parameters			
Voltage Support	110V	Color Temperature	3000K
Lighting Chip	14W Dimmable Chip	Installation Type	Hardwired
CRI (Color Rendering Index)	>85	Lumen Output	1120 Lumens

Table of Contents

Crossbar Assembly

STEP 1

Wiring

STEP 2

Install Body

STEP 3

Install Crystal Pillars

STEP 4

Secure Crystal Pillar

STEP 5

STEP 1

- Crossbar Assembly



1. Remove your old lights and get started.

The first step to install your new crystal wall lamp is to carefully remove your old light. Then, take out your new wall light from the package and unscrew the backplate screws to remove the mounting bracket. Secure the bracket onto the wall or a pre-installed junction box. Gently thread the wires from the junction box through the center hole of the mounting bracket and tighten the machine screws on the junction box to fix the bracket onto it.

STEP 2

- Wire the wall lamp



2. Wire the wall lamp.

Next, have an assistant support the fixture while completing the connection. Use wire connectors to connect the wires from the wall sconce to the power source in the junction box.


Black to black (The hot wire is usually black or red and is used to bring electricity into the light fixture. It is also referred to as the "line.")

White to white (The neutral wire is typically white and is used to bring electricity back from the light fixture to the circuit panel.)


Grounding to ground (The ground wire is usually green or bare copper and is used to protect people and equipment from electric shock.)

Twist the two ends of the wires together and then tighten the wire connectors. Insert the wires into the mounting bracket. Finally, attach the grounding screw around the grounding wire of the wall lamp to the mounting bracket. Once the wires are in place, tighten the screws. If the junction box does not have a grounding wire (green or copper wire), contact a certified professional electrician.

Wiring Diagram

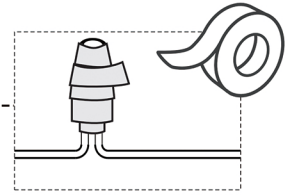


White wire (neutral)
from outlet box




White wire
from fixture

Black or Red wire (hot)
from outlet box



Black wire
from fixture

Bare or Green ground wire
from outlet box

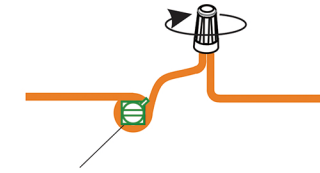

Ground wire
from Fixture

*Green Ground Screw on crossbar optional

STEP 3

- Install Light Body



3. Attach the wall lamp.

Install the wall lamp onto the backplate that was installed in step two, making sure that the holes on both sides of the lamp body align with the holes on the backplate. Once aligned, it is recommended to use a level to ensure that the lamp is in a horizontal position. After confirming the appropriate position, use screws to secure the lamp body onto the wall.

Note that when screwing in the first screw, it should only be screwed in slightly, not completely. Wait until the second screw is screwed in before fully tightening the first screw.

However, in the following cases, we will not be able to provide free warranty services for your products within the warranty period:

- ① Product damage or damage to home circuits caused by improper installation or installation by an unlicensed electrician;
- ② Use of the product in an environment outside the recommended use site;
- ③ Normal wear and tear, self dismantling for repairs, ageing of electrical wiring, etc.
- ④ Natural disasters, such as earthquakes, floods, etc.
- ⑤ Improper installation.

Please note that the above after-sales guarantee is authorized. If you have any questions, please contact us directly through the original order page and we will respond within 24 hours and we will reply within 24 hours. We comply with local laws and regulations to ensure that our product quality and service level meet the standards.

Our fees for repairing parts depend on the specific issue and your warranty status. If the problem is covered by the warranty and within the warranty period, you won't be required to pay for repairs. If the problem is not covered by the warranty or outside of the warranty period, please contact us through the original order page and pay for the out-of-warranty parts. Please note that some problems may not be fixable. If your product is severely damaged, destroyed, or malfunctioned due to unauthorized modifications or non-official authorized repairs, we may be unable to provide repair services.

Discontinued Products: Products that have been discontinued and have been out of production for over two years will not be serviced. Spare parts will no longer be available, and the warranty will no longer apply. This policy is subject to updates, as permitted by law.



Product Manual

Wall Sconces