


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

3-LIGHT CHANDELIER

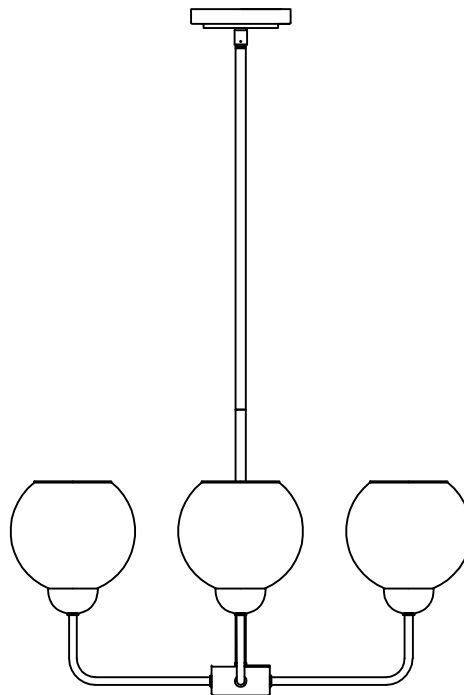

TOOLS REQUIRED

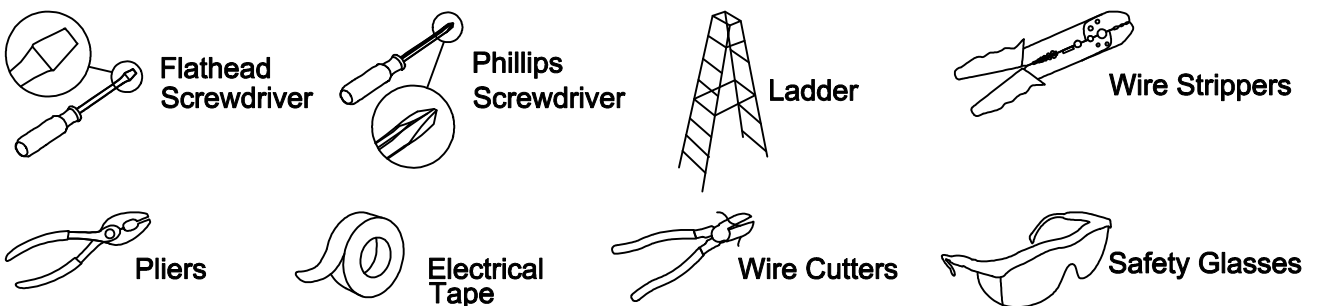

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.


PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Mounting bracket	1
C	Green ground screw	1
D	Outlet box screw	2
E	Canopy	1
F	Mounting screw	2
G	12" tube	3
H	6" tube	2


PIECE	DESCRIPTION	QUANTITY
I	Embossed nut	1
J	Round plate	1
K	Fixture body	1
L	Hexagon nut	3
M	Washer	3
N	Light arm	3
O	Glass shade	3
P	Socket ring	3
R	Wrench	1

INSTALLATION

1. Attach the light arm(N) to the fixture body(K) with the hexagon nut(L) and washer(M), then adjust the light arm (N) and lock it with wrench(R).
2. Lock the round plate(J) to the fixture body(K) with the Embossed nut(I).
3. Attach the 6" tube (H) to fixture body (I), then lock the 12" tube (G) to the 6" tube (H), and attach the canopy(E) to the 12" tube (G).
4. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire, black to (black) and white to (white).

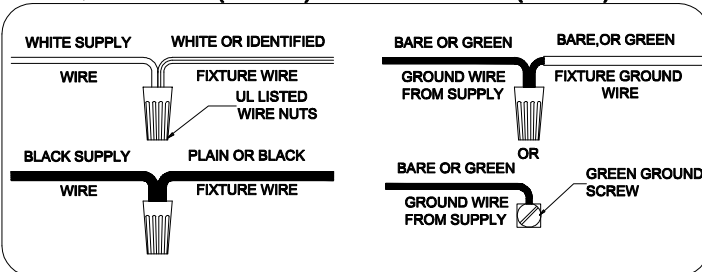

5. Attach the canopy(E) to the mounting bracket(B) with the mounting screw (F).
6. Lock the glass shade(O) to the light arm(N) with the socket ring (P).
7. Install the bulb (not included) into socket.

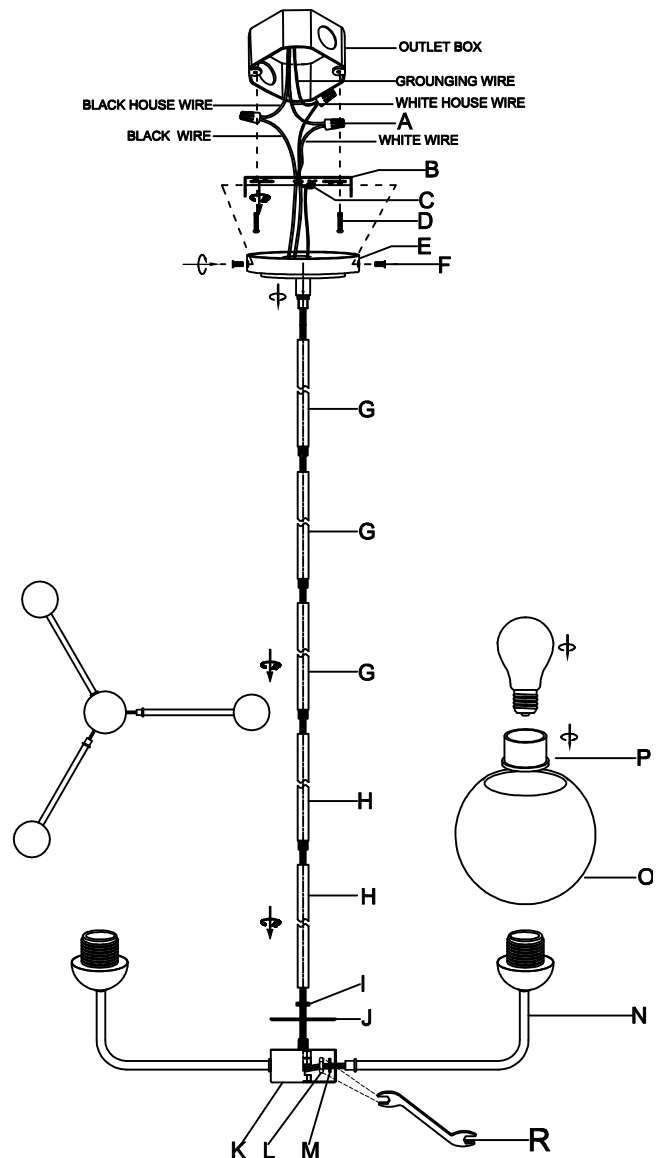

If you have any issues with use this product, please email us. Be sure to include your order number and photos of the issues. This will help us provide you with faster support and solve your problem.