

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Min 90°C supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor. Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

Installation Steps

1. Shut off the power at the circuit breaker and remove existing fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.
3. Remove the Mounting Plate from the back of the fixture.
4. Secure mounting plate to the outlet box using outlet box screws.
5. Adjust the fixture wire length by Loosen the Plastic screw and pulling the wire as desired. Secure the Plastic screw, The rest of the wire is hidden inside the canopy, and then fix the plastic screw.
6. Connect the fixture wires to supply wires as shown in Fig.1, making sure that all wire connectors are secured. If your outlet box has a green or bare copper ground wire, connect the fixture ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the green screw provided. After wires are connected, tuck them carefully inside the outlet box.
7. Place the canopy over the mounting plate and secure it to the ceiling plate by using mounting screws.
8. Insert recommended bulb (not included).

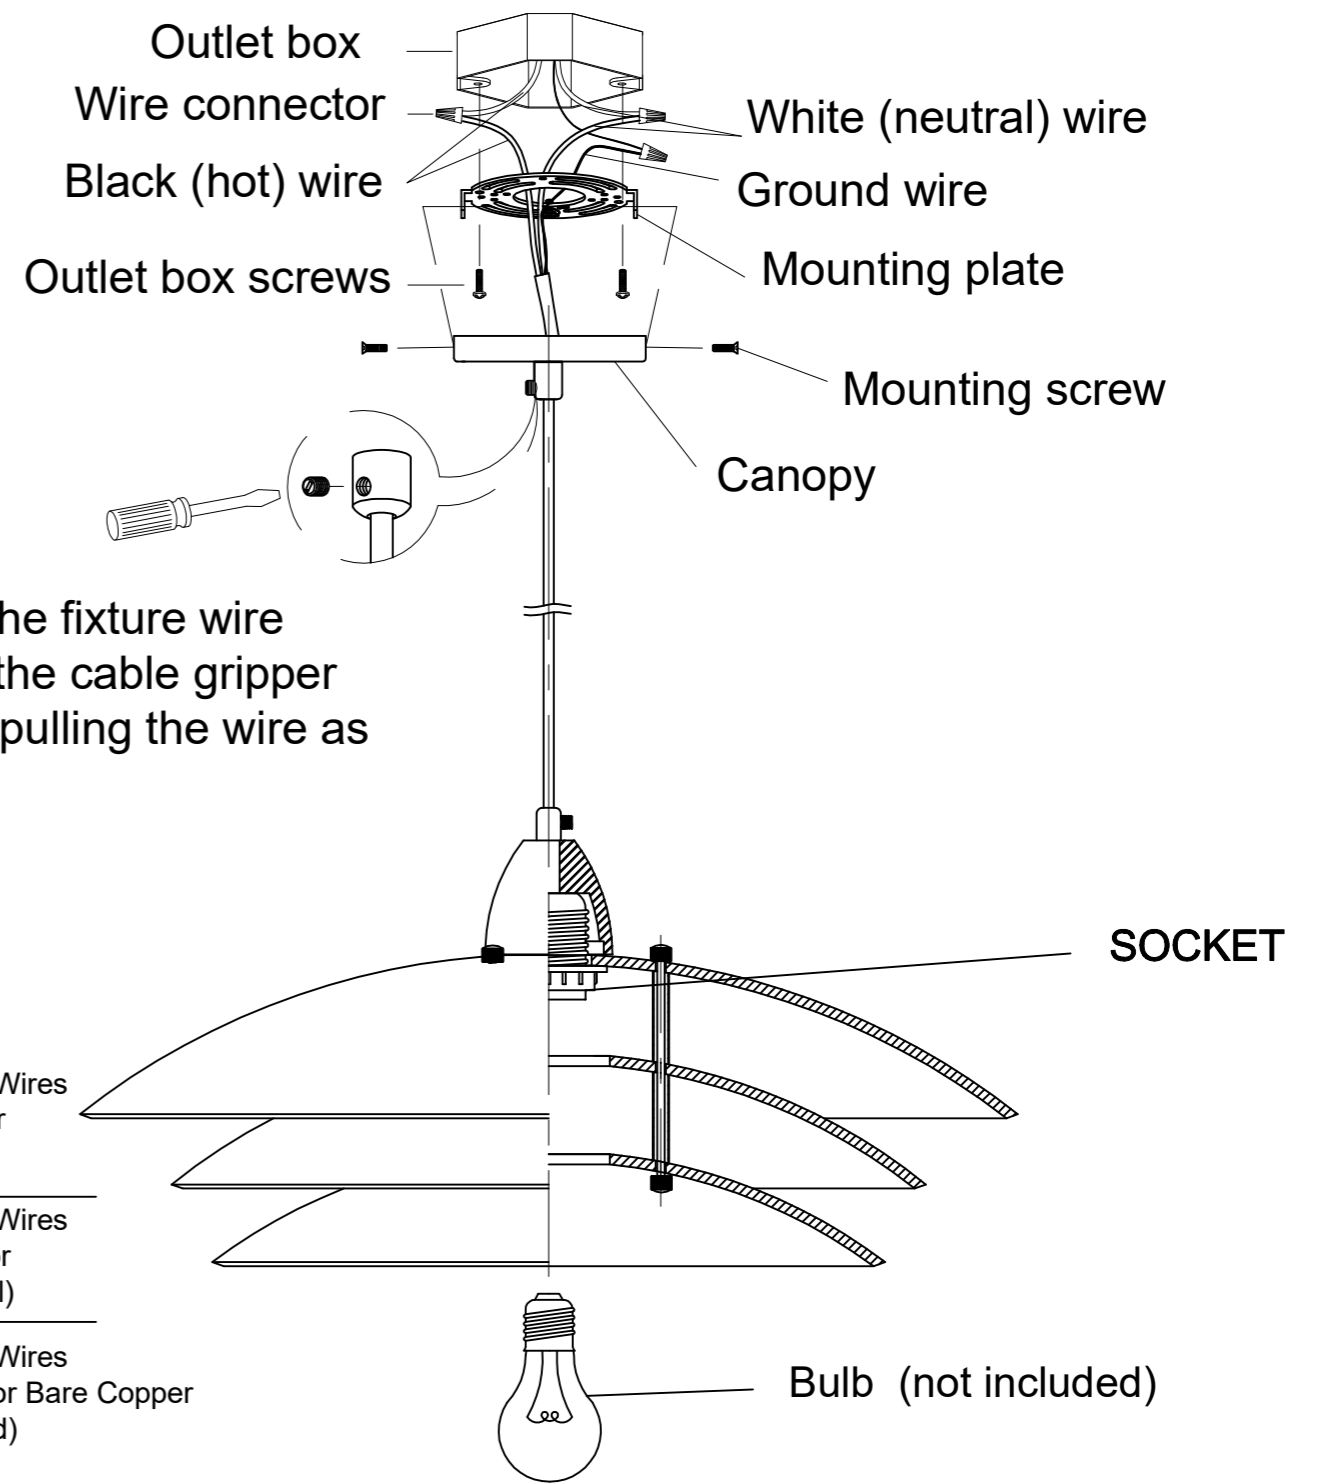

Cable-gripper

Instruction: Adjust the fixture wire length by pushing the cable gripper on the canopy and pulling the wire as desired.

Fig.1

Fixture Wires Black or Smooth	House Wires Black or (Hot)
Fixture Wires White or Ribbed	House Wires White or (Neutral)
Fixture Wires Bare or (Ground)	House Wires Green or Bare Copper (Ground)

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.