# Achhago-360 Photo Booth Products User Guide (B1-D)

Scan Below for Instructional Product Video

With any Camera APP



If you have any questions about your AcchaGo™ 360 photo booth, please do not hesitate to contact Achha Technology's customer service team in the U.S. & Canada by

Toll free number: 1 83 360BOOTH (1-833-602-6684)

SMS & WhatsApp: 1-978-476-3300

Email: support@achhago.com

# **Installation Guide**

A diagram to explain the overall structure in detail



# Table of Contents

| I Components Introduction1                  |
|---|
| II Installation Guide4                      |
| III Operation Instructions7                 |
| IV How to install the power bank?8          |
| V How to get the software Free Trial code10 |
| VI How to customize the logo10              |
| VII Cautions11                              |
| VIII 360 Photo Booth Warranty11             |

# **I Components Introduction**





AC01-Platform with LOGO\*1

AC02-24V AC-DC Adapter for Motor\*1

AC03-Foot Cup for Platform\*9 (one for backup)







AC04-Remote Controller\*2

AC05-Ring Light\*1

AC06-LED Strip\*1

(one for backup)







AC07-5V Adapter for LED Strip\*1

AC08-Remote Controller for LED Strip\*1

AC09-User Guide for Remote Controller of LED Strip\*1



AC10-Angle Adjuster
+ Selfie Telescopic
Rod\*1set



AC11-Remote Shooting\*1



AC12-User Guide for Remote Shooting\*1



AC13-Tablet Holder\*1



AC14-1# Phone Holder\*2



AC15-2# Phone Holder\*2



AC16-Metal Bracket\*2



AC17-Ring Light Battery Holder\*1



AC18-1/4 Screw\*2 (one for backup)







AC19-Cart with Four Universal Wheels\*1

AC20-Portable Bag\*1

AC21-Accessories
Handbag\*1set



AC22-1# Fixed Screw\*1 (for backup)



AC22-2# Fixed Screw\*1

(for backup)



AC23-Emergency
Disassembly Tools\*1set

#### **II Installation Guide**

#### Scan the QR CODE for Instructional Product Video

With any Camera APP



Step1: Take the Platform out of the package and place it on the ground, adjust the foot cups to ensure the top of the platform is parallel to the ground.







Step2: Install the Angle adjuster and lock it with the screw.





Step3: Install the Selfie Telescopic Rod and lock it with Fixed Screw. And install Metal Bracket.







Step4: Install Ring Light.




Step5: Install Ring Light Battery Holder. The Ring Light should connect to the USB port of the power bank. Any mobile phone's 5V 2A power bank can power the ring light.







Step6: Install Fixed Bracket.

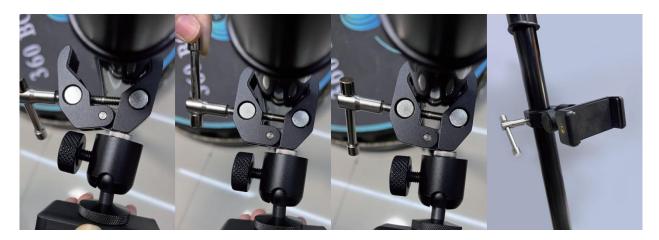

Step7: Assembling Phone Bracket. Mount other holders and brackets to the pole. The rest parts can be combined freely.



Step8: Stick the LED Strip around the base and connect it to 5V Adapter (for LED Strip).










Step9: Connects the 24V AC-DC Adapter to the control box.

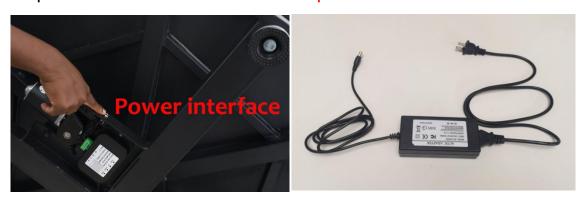

#### **III** Operation Instructions


#### Preparation:

Install CR-2032 batteries for all remote controllers (one for AC04 remote, one for AC08 remote, and one for AC11 Remote Shooting).

Plug the ring light USB port into a power bank (not included in the standard package).

Plug the LED strip port into the 5V Power Adapter (Part AC07). Plug the AC-DC Adapter (Part AC02) into a power outlet.


1. The remote controller of the Selfie telescopic rotation rod, and the remote of LED Strip:

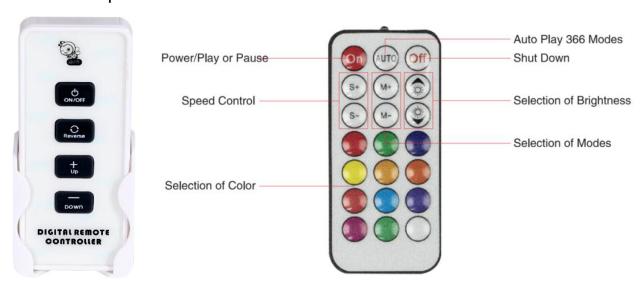

## 2. Installing batteries into the remotes:

Selfie telescopic rotation rod remote(1).



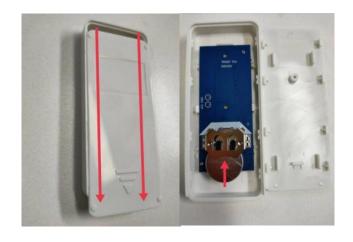




Remote Shooting Controller(3).



# ${f I\!V}$ How to install the power bank?

The standard package of our 360 photo booth include a power bank for the ring light.

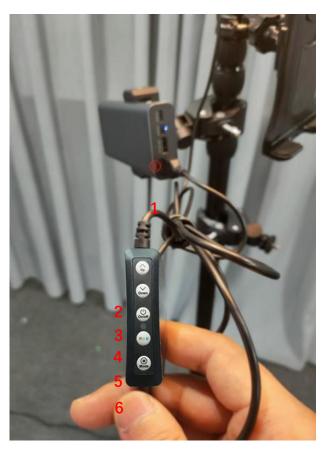

The Ring Light should connect to the USB port of the power bank for the ring light.

- ① Ring Light USB connection with Power Bank.
- ② Brightness Increase Button.
- ③ Brightness Decrease Button.
- 4 Power Button.
- (5) RGB Button.
- 6 Mode Adjustment Button.

## V How to get a free trial code for Touchpix?

We will provide the trial code through a message on the platform where you placed your order. If you do not receive it, please send an email to support@achhago.com, ensuring that your email includes your phone number and proof of purchase for your booth.

# VI How to customize the logo for your 360 photo booth?

Please provide us with a high-resolution logo file (acceptable formats include AI, PSD, CDR, PNG, and JPG) with a minimum size of 1500 x 1500 pixels. Alternatively, you can share your brand name, pattern, or text ideas, and our Professional Design Team will be more than happy to create a design for you.

#### VII Cautions

- The Selfie Telescopic Rod will spin when the machine is in operation. Before turning on the machine, please make sure the power cord, the base LED Strip cord and other items are NOT tangled and stuck on the telescopic rod, to prevent the cables from being damaged.
- 2. For users' safety, don't jump on the Platform.
- 3. Don't make the edge of the Platform bear too much weight; better distribute the weight evenly on the Platform top.
- 4. The Platform should be adjusted parallel to the ground by adjusting the foot cup before using.
- 5. Do not block the rotating rod with force when it was running.
- 6. Do not put heavy objects on the Angle Adjuster and Selfie Telescopic Rod.
- 7. Children should not use it alone and must be accompanied and monitored by an adult.

## **VIII** 360 Photo Booth Warranty

Warranty provided by Accha Technology Inc.

**Customer Support:** 

Email: Support@AchhaGo.com

Toll free number: 1 83 360BOOTH (1-833-602-6684)

SMS & WhatsApp: 1-978-476-3300

YouTube: AchhaGo 360 Photo Booth Store

#### **Warranty Coverage**

STANDARD ONE YEAR MANUFACTURER WARRANTY:

The manufacturer warrants this product (360 Photo Booth) to be free from defects in workmanship and materials, under normal residential use and conditions, for a period of one (1) Year for the original invoice date. The manufacturer agrees, at its option during the warranty

period, to repair any defect in material or workmanship or to furnish a repaired or refurbished product of equal value in exchange without charge (except for a fee for shipping, handling, packing, return postage and insurance which will be incurred by the customer). Such repair or replacement is subject to verification of the defect or malfunction and proof of purchase as confirmed by showing the model number on original dated sales receipt.

After the one (1) year warranty period expires, we will continue to provide complimentary, prompt, and effective online after-sales support. If parts replacement is required, you will be responsible for covering the cost of the new components and completing the installation.

The manufacturer warrants the whole photo booth, including the motor, platform, electric components, and accessories. The manufacturer cannot cover the damage to the hard case or padded soft bag resulting from normal wear. However, please note that free warranty and gifts are only available for orders placed directly with us for the 360 photo booth machine.

## This warranty does not include:

- •Any condition resulting from other than ordinary residential wear or any use for which the product was not intended.
- Any condition resulting from incorrect or inadequate maintenance or care
- Damage resulting from misuse, abuse, negligence, accidents, or shipping damage
- Dissatisfaction due to buyer's remorse
- Damages incurred during buyer's transportation
- Normal wear and tear
- Damages incurred during assembly or maintenance