




Manual



LED Wall-mounted Mirror

Instructions & Installation












Statement

Please read this instruction carefully before installation, and refer to it again during the installation to ensure a safe and correct installation of the mirror.

Compliance

All the electrical components used in this product are ETL LISTED. This product passed ETL and UL certifications.

Electrical Safety Instructions

-  INSTALLATION should be made by a qualified / registered electrician. DO NOT attempt to install it by yourself, as we will not be responsible for any damage caused during installation.
-  According to IEEE regulations, this product is suitable for zone 2 and external zone, not zone 0 or zone 1. It is also not suitable for installation in saunas, steam rooms or shower cubicles.
-  This product is only suitable for permanent installation, please do not plug in the power strip.
-  Please make sure to keep the electrical supply off during installation and maintenance. It is recommended to pull out the fuse or switch off the circuit breaker before installation to disconnect the necessary circuits.
-  LED mirror adopts three-pin UL plug, power leads must be connected to ground wire.
-  DO NOT put hard and sharp materials directly against the mirror surface during operation, otherwise it may result in current leakage and even personal injury accident.
-  Never forget to turn off the power supply in storm days, otherwise electric components of the product could be damaged.
-  DO NOT switch off the power supply directly during normal operation, otherwise electric elements of the product may be easily damaged.
-  Please turn off the power supply if the product is not used for a long time.
-  DO NOT remove protective film or corner protectors until the mirror is completely installed.
-  PLEASE KEEP THIS MANUAL BOOK FOR FUTURE REFERENCE.



LED Wall-mounted Mirror

Wiring

Supply 1m cord and U.S 3-pin plug for easy connection with wall socket. This product all can connect the cord in the wall and be controlled by wall switch.

Cleaning

When the mirror has to be cleaned, please switch off the power first.

DO NOT use abrasives or solvents when cleaning.


DO NOT let water get in the mirror and submerge mirror in water.

Wipe off all water spillages as soon as possible via a soft, damp cloth.

Specification

Product Name:	LED LIGHTED MIRROR	Certificates:	ETL, UL, CE, ROHS
Brand:		Input Voltage:	110v
Design Style:	Modern	Power:	60w
Feature:	Illuminated	Lumen:	2500-3000lm
Mirror Shape:	Square	Input Frequency:	60Hz
Function:	Anti-fog, memory function	Color Temperature:	3000k-6000k optional
Installation:	Wall mounted	IP Rating:	IP44
Glass Thickness:	5mm	Net Weight:	11.4kg
Light Color	White/Warm/Cold changeable	Gross Weight:	14.4kg
Touch Sensor	Yes	Item Size:	700*900mm
Material:	Copper-free silvered glass + Aluminum frame	Package Size:	1020*820*110mm
Dimming Function:	Yes	Warranty:	2 years
Hanging Way:	Vertical/Horizontal	Application:	Bathroom, makeup room

Operation Instructions

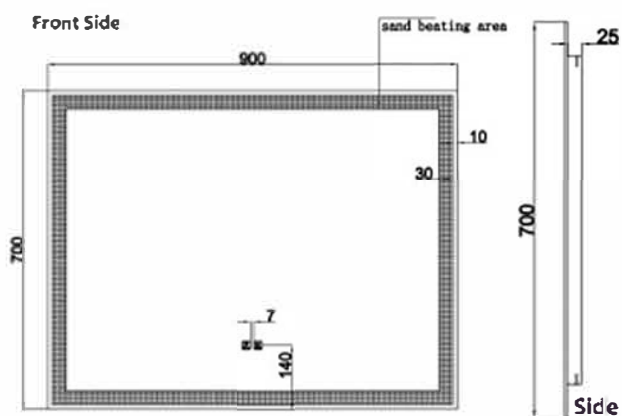

Light on/off

Power on, then press  to turn the light on, the light is warm light.


Then second time press , the light change to cool white light. The

third time press , the light change to natural light . Then press



 again to turn the light off.

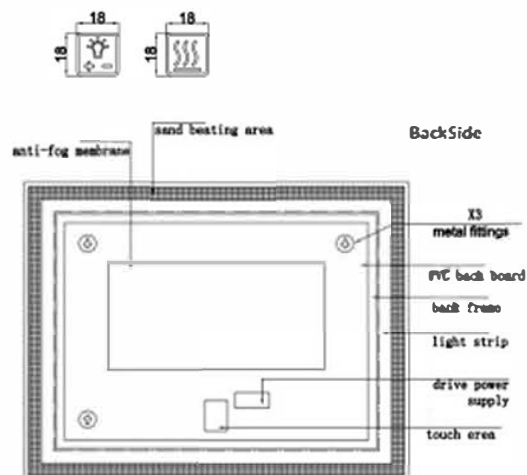

LED Wall-mounted Mirror



Dimming instruction


Power on, press  to turn the light on, then keep pressing , the brightness will change accordingly.

Fog-free instruction


(For the led mirror with anti-fog function)

Power on, press , the mirror can be defogging.

Installation



Ruler



Spirit Level




Electrical Drill



Screwdriver



Hammer




2 x screws and white nylon screw type plug



4 x spacer

Step 1

Stick spacers on mirror backside to keep the mirror be flat.

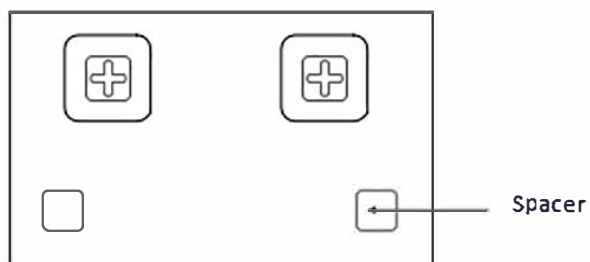




LED Wall-mounted Mirror


Step 2

Measure the distance of A (two hooks center distance).

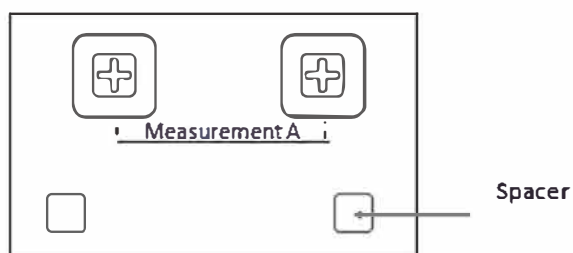


Step 3

Marked 2 dots on wall with length of A, and drill holes.

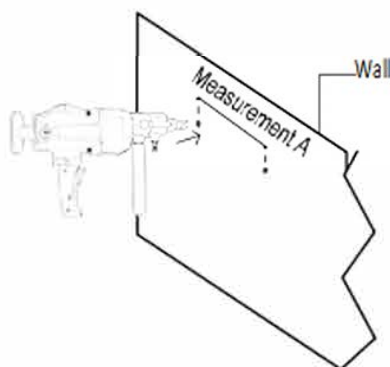


Step 4

Put the white nylon screw type plug in the holes and screws in to the plug.

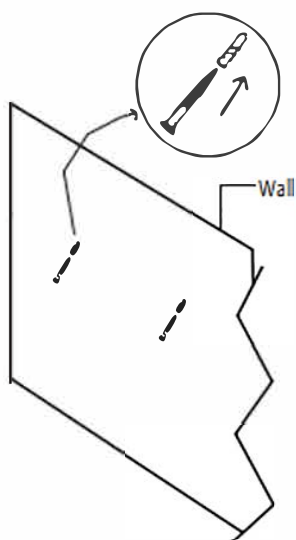

Step 5

Hang the mirror to wall.

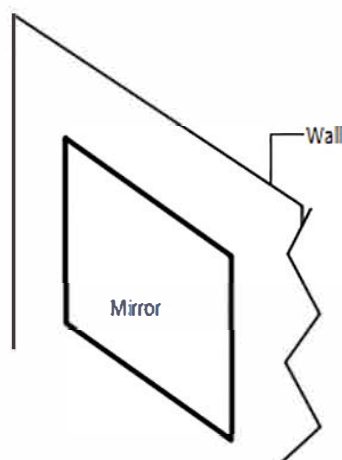


★★★★ About the wire connection ★★★★★

There are two ways to connect the circuit for the mirror.

Connection way ❶: Plug the 3-pin plug in the socket on the wall.



LED Wall-mounted Mirror

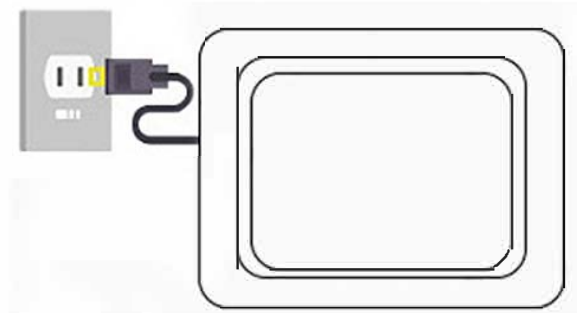

Connection way ②: Connect the mirror wire with wall switch wire via connector.

